




PROBLEM SUMMARY

Sample Rating Trend

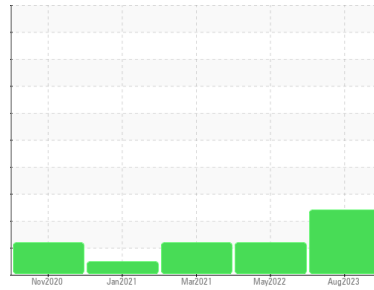

DIRT




Machine Id
910040

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

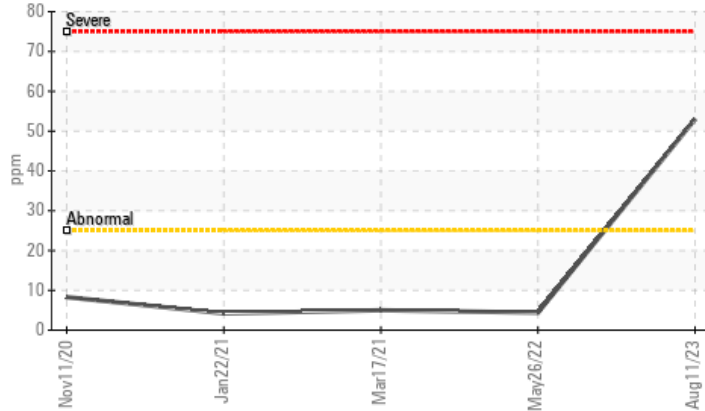

▲ Aluminum (ppm)

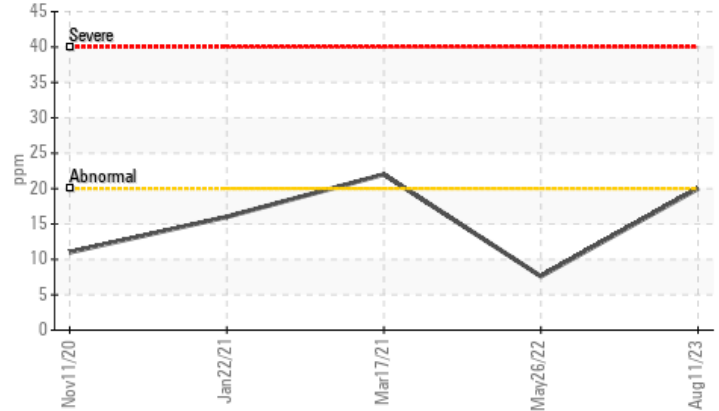

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ATTENTION	ABNORMAL
Aluminum	ppm	ASTM D5185m	>20	▲ 20	8	22
Silicon	ppm	ASTM D5185m	>25	▲ 53	4	5

Customer Id: GFL072
Sample No.: GFL0083041
Lab Number: 05924650
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS

26 May 2022 Diag: Jonathan Hester

FUEL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Light fuel dilution occurring. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

[view report](#)



17 Mar 2021 Diag: Jonathan Hester

GLYCOL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

[view report](#)



22 Jan 2021 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the component make and model with your next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

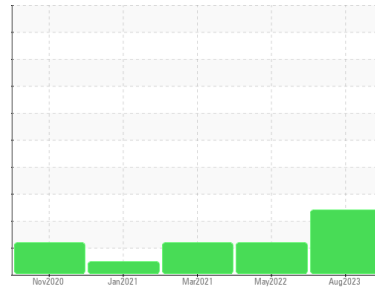

DIRT



Machine Id
910040

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0083041	GFL0044639	GFL0003222
Sample Date	Client Info	11 Aug 2023	26 May 2022	17 Mar 2021
Machine Age	days	0	0	60
Oil Age	days	0	90	60
Oil Changed	Client Info	Not Changed	Changed	Changed
Sample Status		ABNORMAL	ATTENTION	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	▲ 3.1	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	43	21	50
Chromium	ppm ASTM D5185m >20	11	<1	4
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	1	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	▲ 20	8	22
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	3	<1	1
Tin	ppm ASTM D5185m >15	0	<1	0
Antimony	ppm ASTM D5185m	---	---	3
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	3	4
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	59	57	58
Manganese	ppm ASTM D5185m 0	1	<1	1
Magnesium	ppm ASTM D5185m 1010	854	922	884
Calcium	ppm ASTM D5185m 1070	1013	1262	1009
Phosphorus	ppm ASTM D5185m 1150	974	1041	871
Zinc	ppm ASTM D5185m 1270	1126	1294	1065
Sulfur	ppm ASTM D5185m 2060	2988	3093	2072

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 53	4	5
Sodium	ppm ASTM D5185m	2	4	4
Potassium	ppm ASTM D5185m >20	2	4	▲ 52

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	1.6	2.8
Nitration	Abs/cm *ASTM D7624 >20	4.6	11.6	11.8
Sulfation	Abs/.1mm *ASTM D7415 >30	16.7	24.6	24.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.0	18.4	16.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.6	8.8	9.3







OIL ANALYSIS REPORT

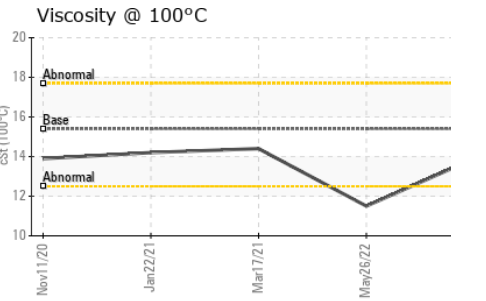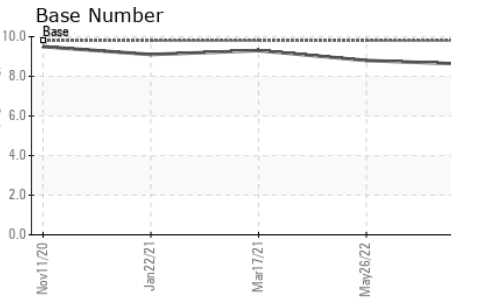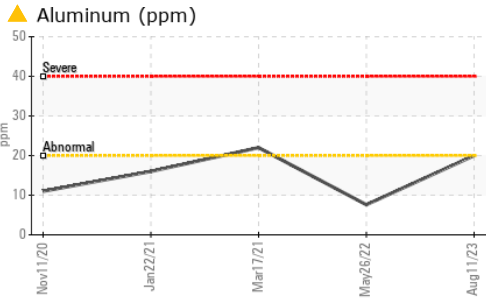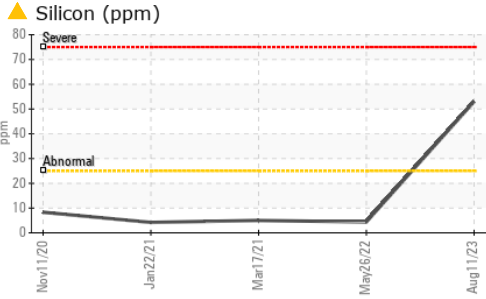

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	▲ 11.5	14.4

GRAPHS

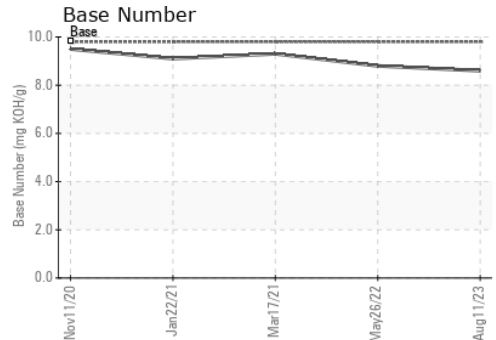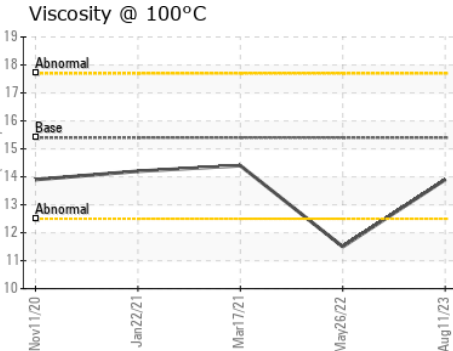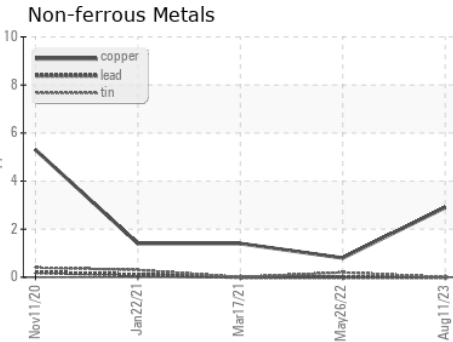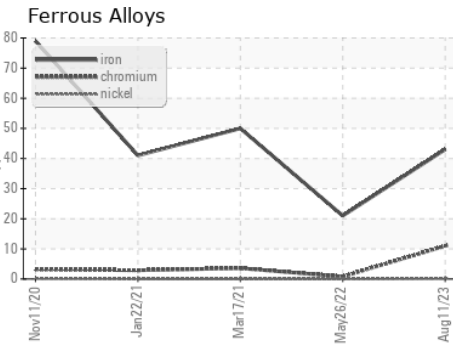

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0083041 **Received** : 15 Aug 2023
Lab Number : 05924650 **Diagnosed** : 16 Aug 2023
Unique Number : 10604597 **Diagnostician** : Sean Felton
Test Package : FLEET

GFL Environmental - 072 - Americus - Transwaste
 361 McMath Mill Road
 Americus, GA
 US 31719
Contact: RICHARD HEINZERLING
 richard.heinzerling@gflenv.com
 T: (229)924-3669
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)