



# PROBLEM SUMMARY

Sample Rating Trend


GLYCOL



Machine Id  
**929108-285**


Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

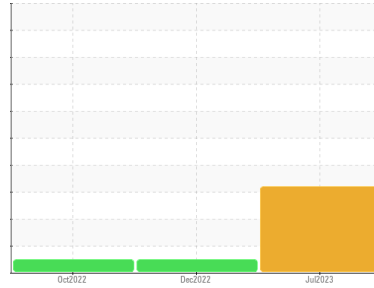


## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

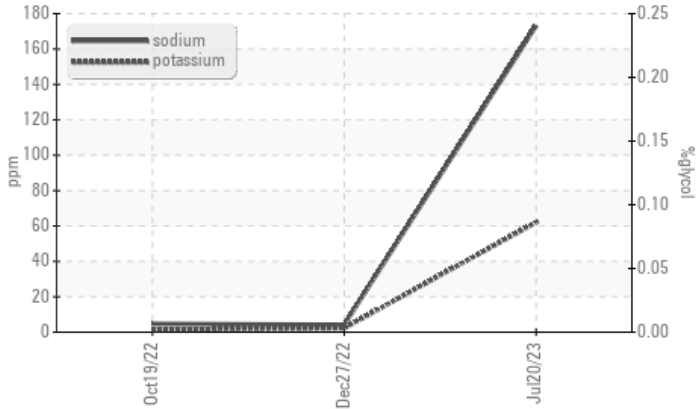

### ▲ Non-ferrous Metals

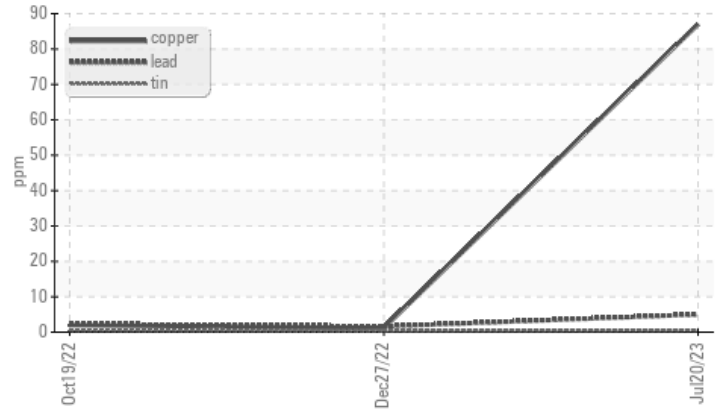

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Copper	ppm	ASTM D5185m	>85	▲ 87	1	2
Sodium	ppm	ASTM D5185m		▲ 173	4	5
Potassium	ppm	ASTM D5185m	>20	▲ 62	2	2

Customer Id: GFL904A  
 Sample No.: GFL0066135  
 Lab Number: 05924696  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

27 Dec 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



19 Oct 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

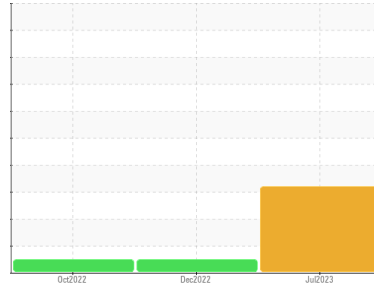

GLYCOL



Machine Id  
**929108-285**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

The copper level is abnormal. All other component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0066135</b>	GFL0055738	GFL0055735
Sample Date	Client Info	<b>20 Jul 2023</b>	27 Dec 2022	19 Oct 2022
Machine Age	hrs	<b>11368</b>	9716	9181
Oil Age	hrs	<b>600</b>	500	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>20</b>	9	13
Chromium	ppm ASTM D5185m >4	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>3</b>	<1	2
Lead	ppm ASTM D5185m >45	<b>5</b>	2	2
Copper	ppm ASTM D5185m >85	<b>▲ 87</b>	1	2
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>6</b>	28	14
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>90</b>	69	57
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>933</b>	952	779
Calcium	ppm ASTM D5185m 1070	<b>1147</b>	1383	1267
Phosphorus	ppm ASTM D5185m 1150	<b>1003</b>	1072	957
Zinc	ppm ASTM D5185m 1270	<b>1229</b>	1347	1152
Sulfur	ppm ASTM D5185m 2060	<b>2558</b>	3722	3465

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>11</b>	6	6
Sodium	ppm ASTM D5185m	<b>▲ 173</b>	4	5
Potassium	ppm ASTM D5185m >20	<b>▲ 62</b>	2	2
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>10.0</b>	7.7	8.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.9</b>	19.7	20.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.1</b>	15.1	15.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.4</b>	8.9	8.5







# OIL ANALYSIS REPORT

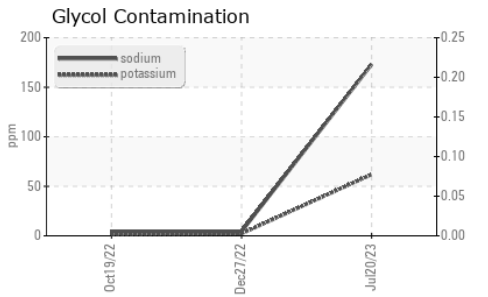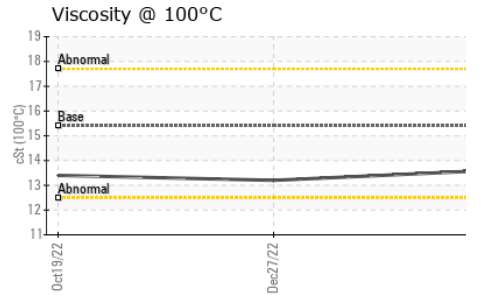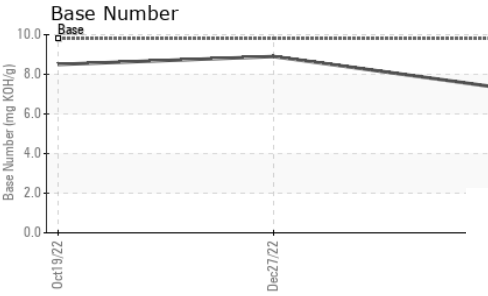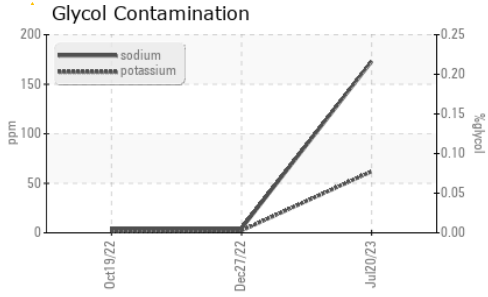

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.2

## GRAPHS

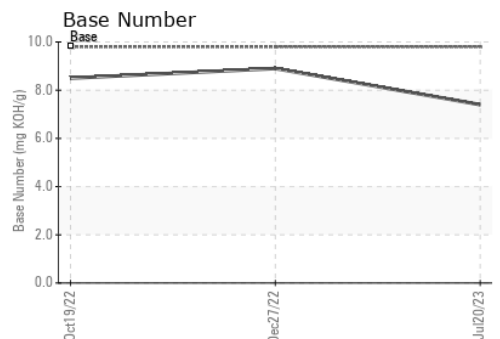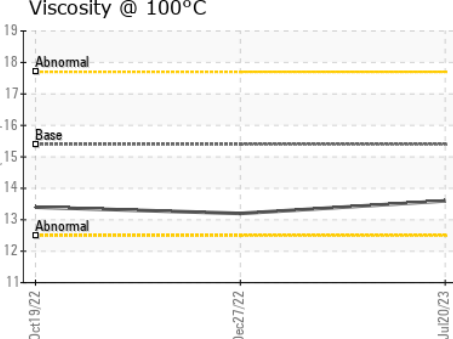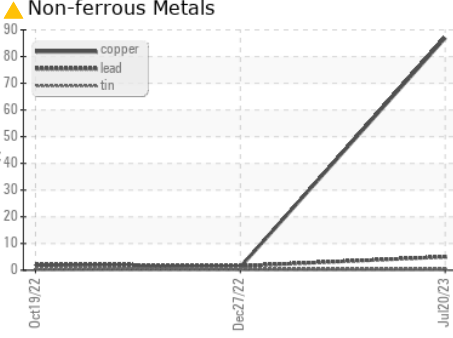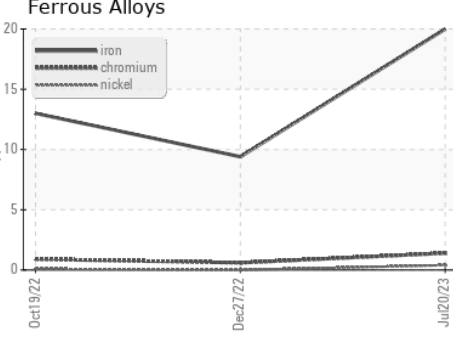

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0066135 **Received** : 15 Aug 2023  
**Lab Number** : 05924696 **Diagnosed** : 16 Aug 2023  
**Unique Number** : 10604643 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 904A - Thorpe**  
 N14985 Tieman Ave  
 Thorp, WI  
 US 54771  
 Contact: Andy Kane  
 akane@gflenv.com  
 T: (715)202-3420  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)