


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **738686**

Component **Diesel Engine**

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

QTS)		Jul202	2 Nov2022	Mar2023 Au	g2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103009	PCA0094215	PCA0083535
Sample Date		Client Info		01 Aug 2023	10 Mar 2023	17 Nov 2022
Machine Age	mls	Client Info		49480	32921	16418
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	81	55	38
Chromium	ppm	ASTM D5185m	>20	4	3	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	1
Aluminum	ppm	ASTM D5185m	>20	68	45	31
Lead	ppm	ASTM D5185m	>40	2	0	<1
Copper	ppm	ASTM D5185m	>330	174	144	188
Tin	ppm	ASTM D5185m	>15	5	3	3
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	27	25	34
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	47	41	45
Manganese	ppm	ASTM D5185m	0	4	3	3
Magnesium	ppm	ASTM D5185m	950	551	498	472
Calcium	ppm	ASTM D5185m	1050	1788	1570	1686
Phosphorus	ppm	ASTM D5185m	995	723	653	735
Zinc	ppm	ASTM D5185m	1180	928	812	844
Sulfur	ppm	ASTM D5185m	2600	2215	2228	2463
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	7	7
Sodium	ppm	ASTM D5185m		8	6	6
Potassium	ppm	ASTM D5185m	>20	165	107	90
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.2	0.9	0.6
Nitration	Abs/cm	*ASTM D7624	>20	11.5	11.2	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.7	23.2	25.2
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.0	22.6	22.7
Base Number (BN)	mg KOH/g	ASTM D2896		6.5	8.7	10.3
	99					



OIL ANALYSIS REPORT

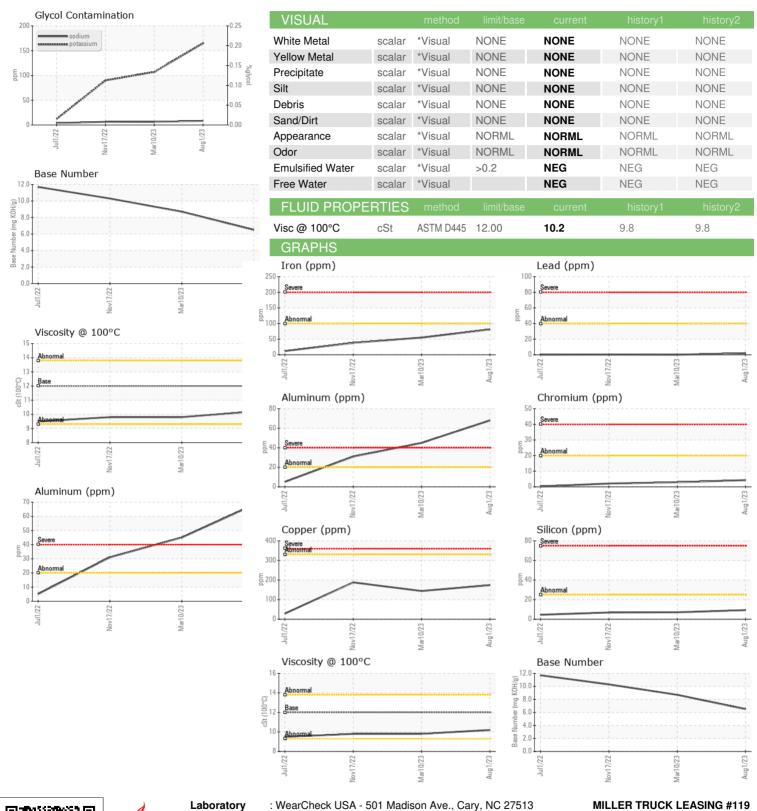





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PCA0103009 : 05925773 : 10605720

Received Diagnosed

: 16 Aug 2023 : 17 Aug 2023 Diagnostician : Don Baldridge

Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. 39 INDUSTRIAL AVE

HASBROUCK HEIGHTS, NJ US 07604

Contact: MIKE LONGETTE mlongette@millertransgroup.com T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (201)528-7053