


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

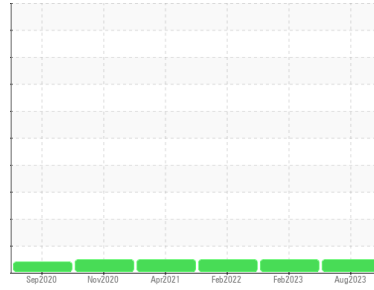

Area  
**600HP**  
Machine Id  
**7637 [600HP]**  
Component  
**Diesel Engine**  
Fluid  
**PFJ 10W30 (38 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0101249</b>	PCA0073178	PCA0055725
Sample Date	Client Info			<b>09 Aug 2023</b>	24 Feb 2023	10 Feb 2022
Machine Age	mls	Client Info		<b>372642</b>	330148	245229
Oil Age	mls	Client Info		<b>42000</b>	46000	30000
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>25</b>	24	11
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>16</b>	16	5
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>30	<b>6</b>	7	5
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	1	1
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>63</b>	68	42
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>1034</b>	963	677
Calcium	ppm	ASTM D5185m		<b>1171</b>	1262	776
Phosphorus	ppm	ASTM D5185m		<b>1031</b>	1057	677
Zinc	ppm	ASTM D5185m		<b>1361</b>	1313	913
Sulfur	ppm	ASTM D5185m		<b>3033</b>	2323	1599

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m		<b>4</b>	5	3
Potassium	ppm	ASTM D5185m	>20	<b>17</b>	15	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	10.1	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	22.7	21.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.0</b>	19.5	17.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.6</b>	5.6	6





# OIL ANALYSIS REPORT

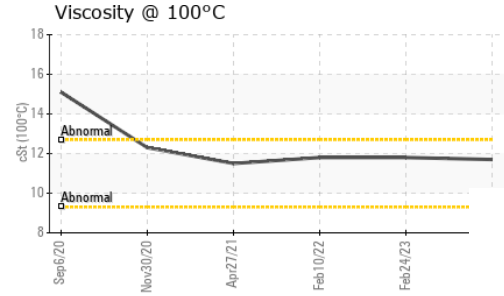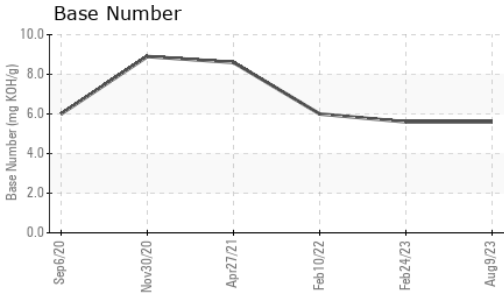

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.7	11.8	11.8

## GRAPHS

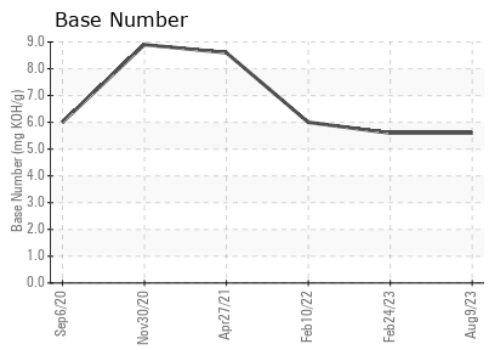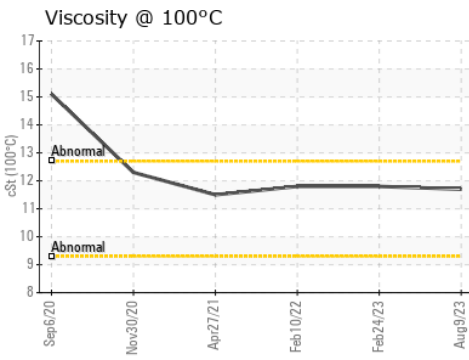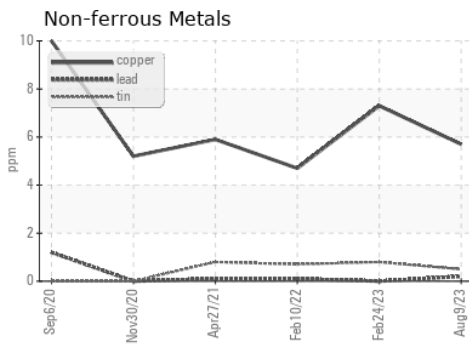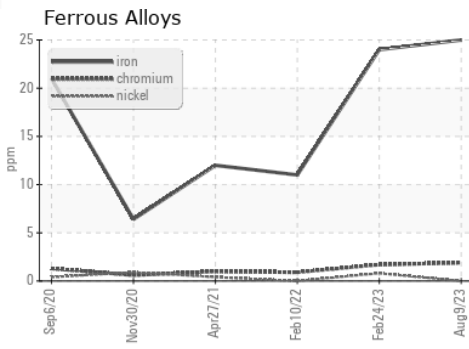

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101249 **Received** : 16 Aug 2023  
**Lab Number** : 05925793 **Diagnosed** : 16 Aug 2023  
**Unique Number** : 10605740 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**McLane Company - High Plains - 600HP**  
 1717 East Loop 289  
 LUBBOCK, TX  
 US 79403  
 Contact: RITA GARCIA  
 rita.garcia@mcclaneco.com  
 T: (806)766-2902  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)