




OIL ANALYSIS REPORT

Sample Rating Trend

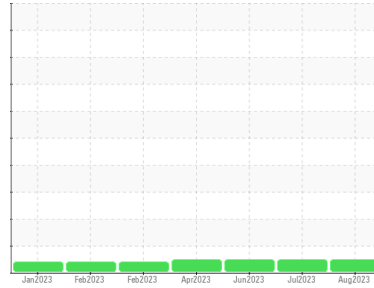

NORMAL



Machine Id
913145

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0087082	GFL0087085	GFL0083705	
Sample Date	Client Info	04 Aug 2023	17 Jul 2023	27 Jun 2023	
Machine Age	hrs	Client Info	1532	1404	1278
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	79	75	73
Chromium	ppm ASTM D5185m >4	3	3	2
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >2	<1	<1	<1
Aluminum	ppm ASTM D5185m >25	53	52	53
Lead	ppm ASTM D5185m >45	0	<1	0
Copper	ppm ASTM D5185m >85	16	15	15
Tin	ppm ASTM D5185m >4	1	1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	8	9	16
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	30	29	21
Manganese	ppm ASTM D5185m 0	3	3	3
Magnesium	ppm ASTM D5185m 1010	923	933	894
Calcium	ppm ASTM D5185m 1070	1361	1384	1436
Phosphorus	ppm ASTM D5185m 1150	940	945	863
Zinc	ppm ASTM D5185m 1270	1186	1186	1071
Sulfur	ppm ASTM D5185m 2060	3716	3826	3742

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	12	13	18
Sodium	ppm ASTM D5185m	4	4	4
Potassium	ppm ASTM D5185m >20	94	92	101

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.9	0.8	0.6
Nitration	Abs/cm *ASTM D7624 >20	13.6	13.2	12.3
Sulfation	Abs/.1mm *ASTM D7415 >30	28.6	27.7	26.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.8	23.7	22.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.1	5.6	6.3







OIL ANALYSIS REPORT

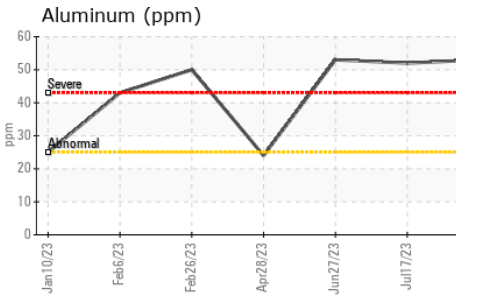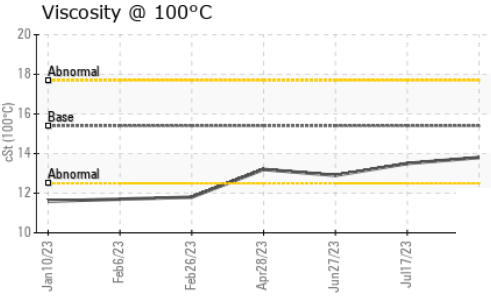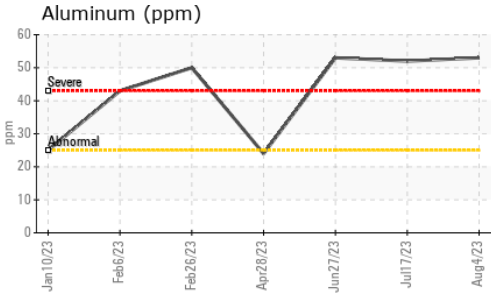

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.5	12.9

GRAPHS

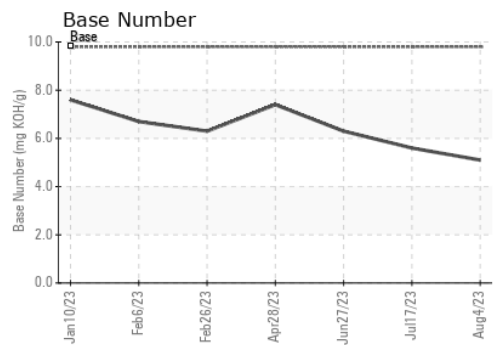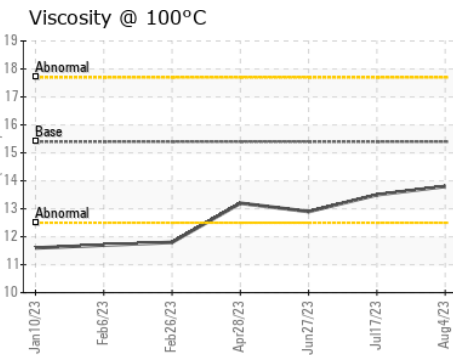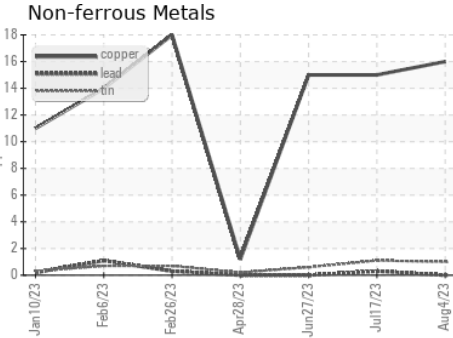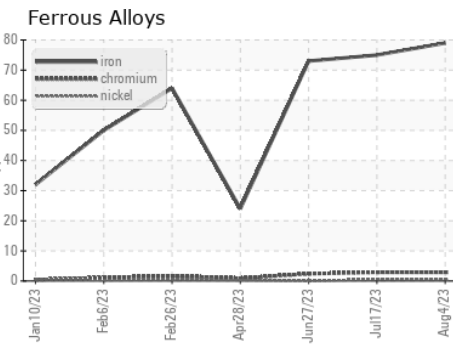

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087082 **Received** : 16 Aug 2023
Lab Number : **05925894** **Diagnosed** : 17 Aug 2023
Unique Number : 10605841 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 844 - Princeton Hauling
 10129 Highway 62 West
 Princeton, KY
 US 42445
 Contact: Kenneth Bigers
 kbigers@gflenv.com
 T: (270)970-0371
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)