




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

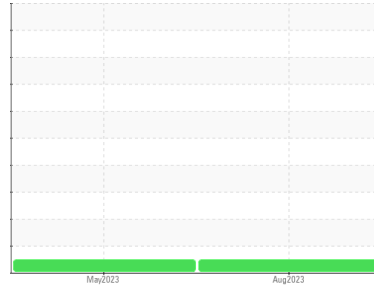

Machine Id  
**913048**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0079030</b>	GFL0079051	---
Sample Date	Client Info	<b>10 Aug 2023</b>	25 May 2023	---
Machine Age	hrs Client Info	<b>1177</b>	598	---
Oil Age	hrs Client Info	<b>598</b>	250	---
Oil Changed	Client Info	<b>Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>21</b>	64	---
Chromium	ppm ASTM D5185m >20	<b>2</b>	2	---
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	---
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	---
Silver	ppm ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >20	<b>7</b>	6	---
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	---
Copper	ppm ASTM D5185m >330	<b>2</b>	6	---
Tin	ppm ASTM D5185m >15	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	4	---
Barium	ppm ASTM D5185m 0	<b>0</b>	2	---
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	59	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	3	---
Magnesium	ppm ASTM D5185m 1010	<b>823</b>	961	---
Calcium	ppm ASTM D5185m 1070	<b>1031</b>	1095	---
Phosphorus	ppm ASTM D5185m 1150	<b>950</b>	1026	---
Zinc	ppm ASTM D5185m 1270	<b>1150</b>	1268	---
Sulfur	ppm ASTM D5185m 2060	<b>3167</b>	3826	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	12	---
Sodium	ppm ASTM D5185m	<b>2</b>	3	---
Potassium	ppm ASTM D5185m >20	<b>23</b>	27	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.4</b>	0.5	---
Nitration	Abs/cm *ASTM D7624 >20	<b>6.9</b>	7.9	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.6</b>	20.3	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.0</b>	15.2	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.8</b>	9.2	---







# OIL ANALYSIS REPORT

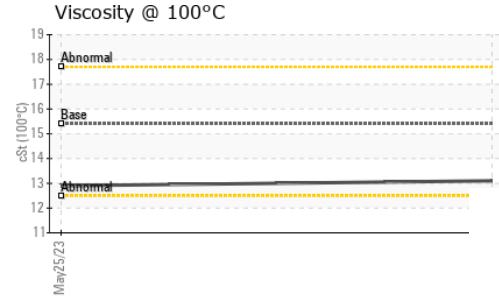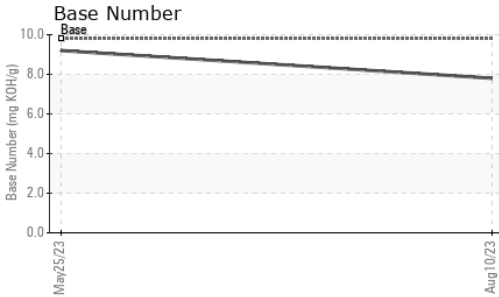

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	12.9	---

## GRAPHS

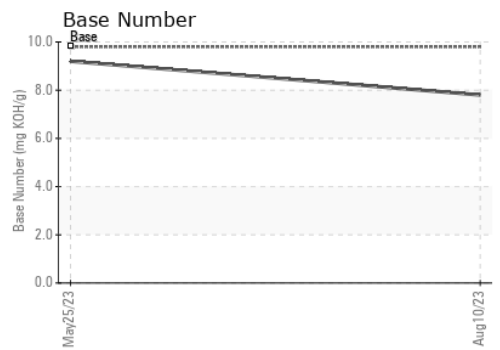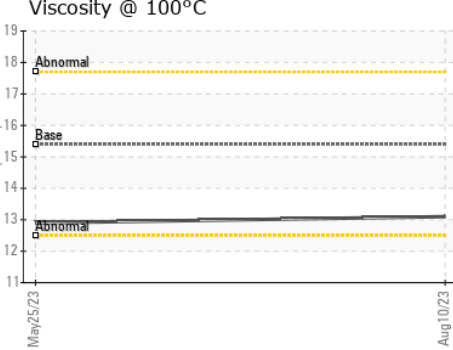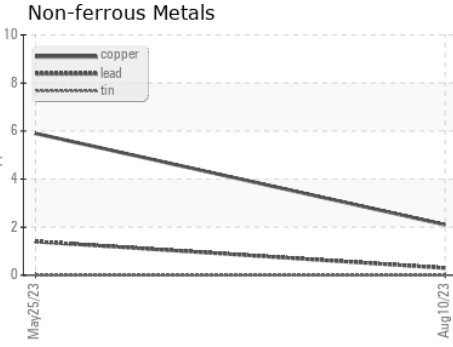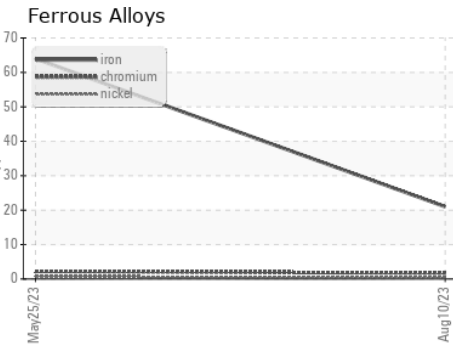

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0079030 **Received** : 16 Aug 2023  
**Lab Number** : **05926603** **Diagnosed** : 17 Aug 2023  
**Unique Number** : 10606550 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 029 - Wytheville**  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382  
 Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com  
 T: (276)223-4476  
 F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)