

# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**PETERBILT 100**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- Oz)**

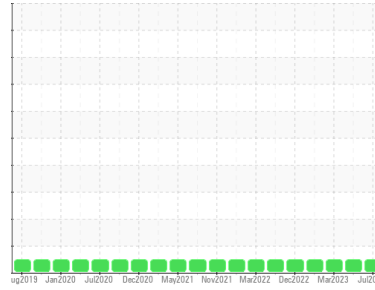

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0083490</b>	PCA0083453	PCA0083501
Sample Date	Client Info		<b>17 Jul 2023</b>	07 May 2023	10 Mar 2023
Machine Age	mls	Client Info	<b>959871</b>	14459	14961
Oil Age	mls	Client Info	<b>959871</b>	14459	14961
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>44</b>	32	28
Chromium	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	1
Lead	ppm	ASTM D5185m >45	<b>2</b>	0	<1
Copper	ppm	ASTM D5185m >85	<b>6</b>	5	6
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	<1	2
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>59</b>	60	62
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>923</b>	1007	1048
Calcium	ppm	ASTM D5185m	<b>1037</b>	1082	1119
Phosphorus	ppm	ASTM D5185m	<b>976</b>	1081	1099
Zinc	ppm	ASTM D5185m	<b>1189</b>	1355	1373
Sulfur	ppm	ASTM D5185m	<b>2946</b>	3777	3997

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	4	5
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	9.0	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	20.6	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	17.8	17.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	8.3	8.7









# OIL ANALYSIS REPORT

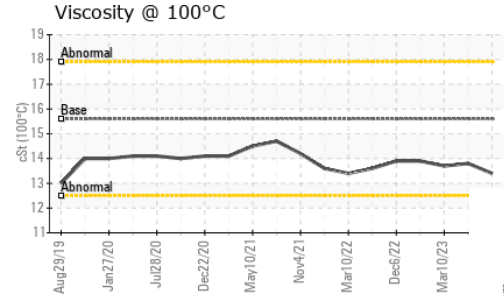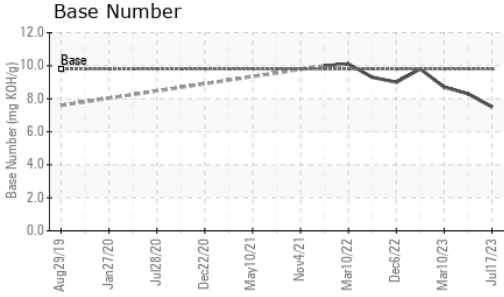

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.8	13.7

## GRAPHS

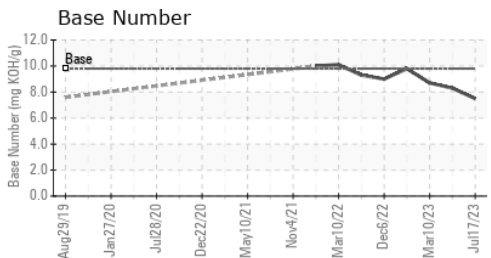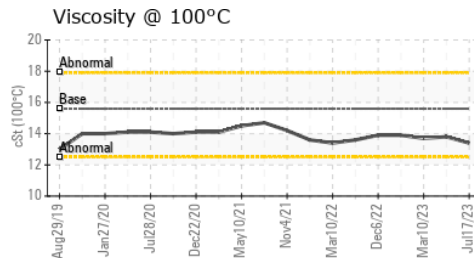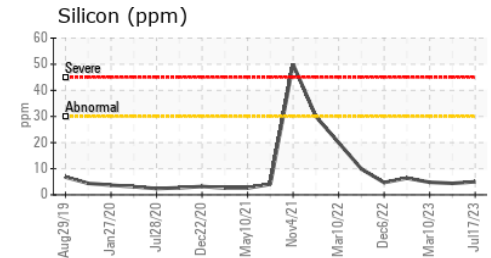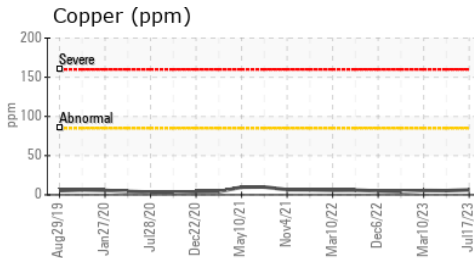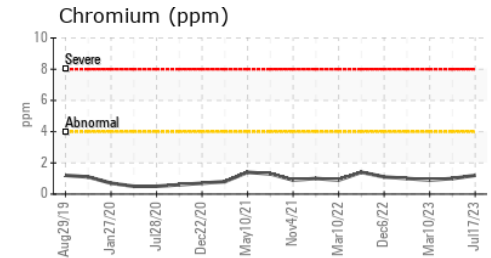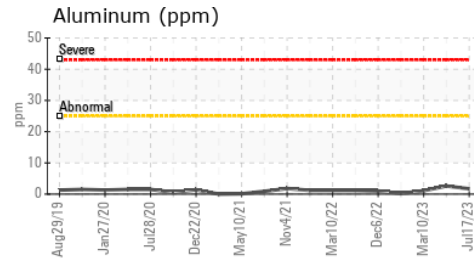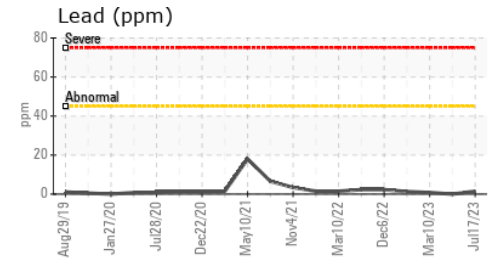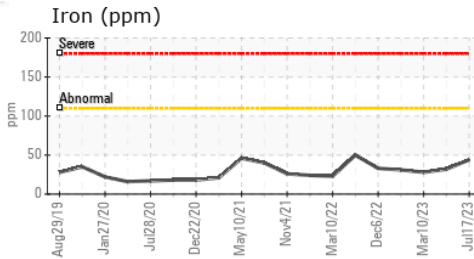

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0083490 **Received** : 16 Aug 2023  
**Lab Number** : 05926663 **Diagnosed** : 17 Aug 2023  
**Unique Number** : 10606610 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALBERT HOGOBOOM OILFIELD TRUCKING INC**  
 767 OIL HILL ROAD  
 EL DORADO, KS  
 US 67042  
 Contact: LOREN JACK  
 loren@hogoboom.net  
 T:  
 F: (316)321-1396

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)