


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
KEMP QUARRIES / BCS - GRAVETTE
Machine Id
OHT118
Component
Transmission (Auto)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

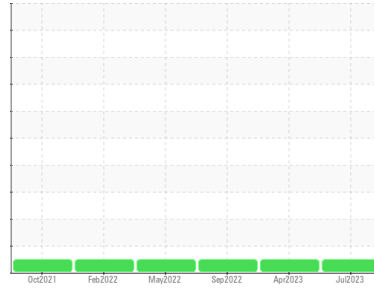

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-2 changed fluid and filters)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0086405	PCA0085991	PCA0062438
Sample Date	Client Info		28 Jul 2023	18 Apr 2023	21 Sep 2022
Machine Age	hrs	Client Info	78920	78734	77947
Oil Age	hrs	Client Info	78920	78734	77947
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	6	4	28
Chromium	ppm	ASTM D5185m >5	0	<1	<1
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >5	0	<1	0
Aluminum	ppm	ASTM D5185m >50	2	<1	2
Lead	ppm	ASTM D5185m >50	22	2	3
Copper	ppm	ASTM D5185m >225	45	12	39
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	0	<1	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	12	20	2
Manganese	ppm	ASTM D5185m 9	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1	208	343	32
Calcium	ppm	ASTM D5185m 3131	2574	2290	2842
Phosphorus	ppm	ASTM D5185m 1194	936	1023	930
Zinc	ppm	ASTM D5185m 1281	1129	1259	1089
Sulfur	ppm	ASTM D5185m 3811	4233	5028	5335

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	3	13
Sodium	ppm	ASTM D5185m	1	2	0
Potassium	ppm	ASTM D5185m >20	0	0	0


VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 88.5	86.1	88.7	87.7

OIL ANALYSIS REPORT

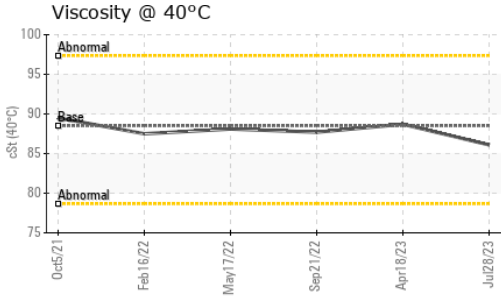

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

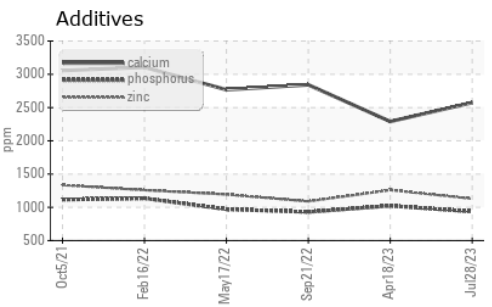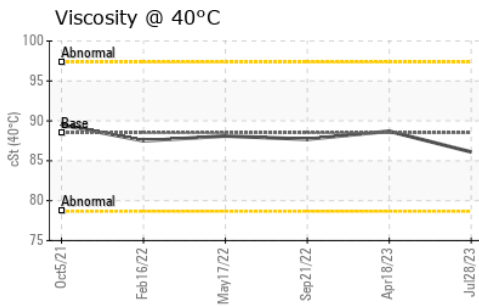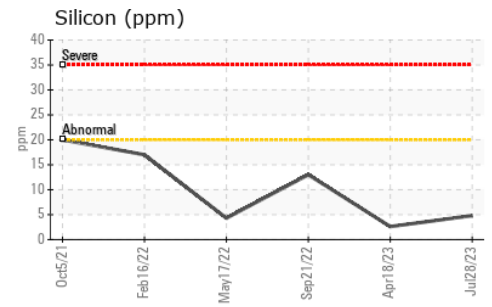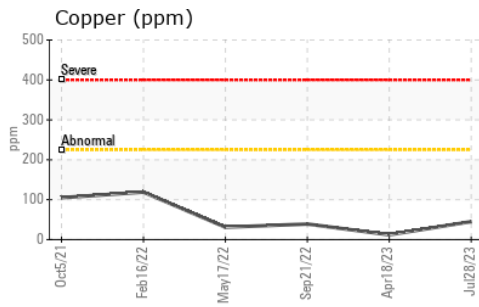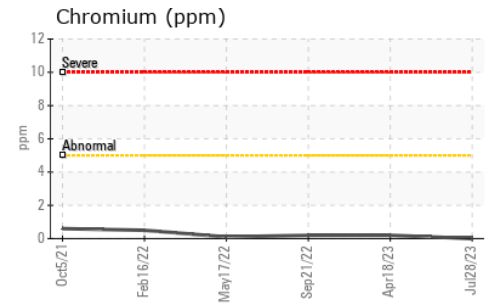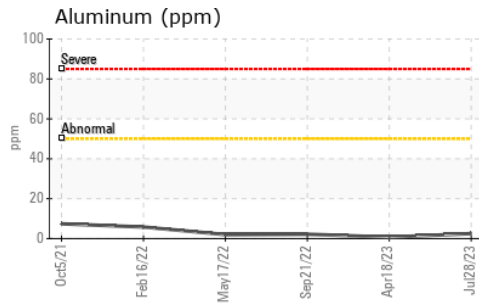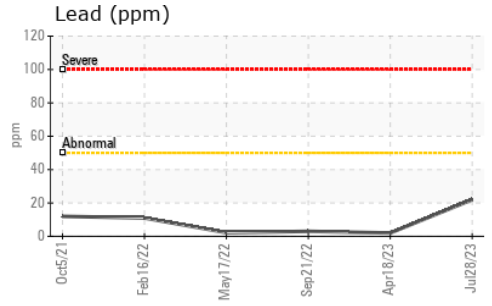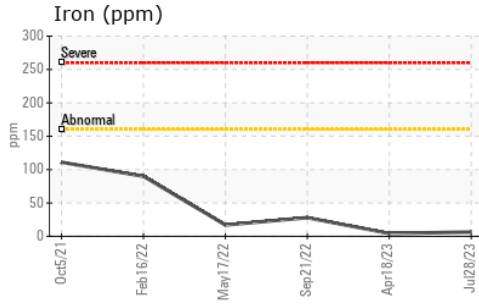

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086405 **Received** : 16 Aug 2023
Lab Number : 05926927 **Diagnosed** : 18 Aug 2023
Unique Number : 10606874 **Diagnostician** : Don Baldrige
Test Package : MOB 1

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768
 Contact:
 gravette@bentoncountystone.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)