




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

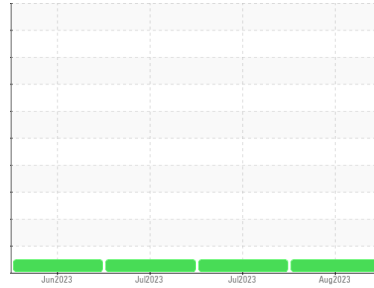

Area  
**{UNASSIGNED}**  
Machine Id  
**933043**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088765</b>	GFL0088723	GFL0086121
Sample Date	Client Info		<b>15 Aug 2023</b>	29 Jul 2023	10 Jul 2023
Machine Age	hrs	Client Info	<b>616</b>	462	292
Oil Age	hrs	Client Info	<b>616</b>	462	292
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>62</b>	56	54
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	<1	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>12</b>	10	8
Lead	ppm	ASTM D5185m >40	<b>2</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>16</b>	16	17
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	17	28
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>51</b>	53	51
Manganese	ppm	ASTM D5185m 0	<b>15</b>	14	15
Magnesium	ppm	ASTM D5185m 1010	<b>777</b>	832	796
Calcium	ppm	ASTM D5185m 1070	<b>1172</b>	1155	1174
Phosphorus	ppm	ASTM D5185m 1150	<b>669</b>	703	751
Zinc	ppm	ASTM D5185m 1270	<b>902</b>	935	909
Sulfur	ppm	ASTM D5185m 2060	<b>2564</b>	2709	2765

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>34</b>	35	33
Sodium	ppm	ASTM D5185m	<b>18</b>	4	6
Potassium	ppm	ASTM D5185m >20	<b>47</b>	40	36
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.4</b>	11.0	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.1</b>	21.3	19.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.4</b>	20.1	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.0</b>	5.1	6.8







# OIL ANALYSIS REPORT

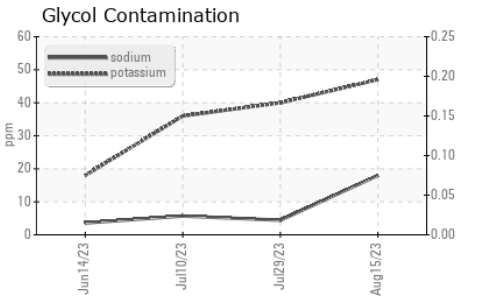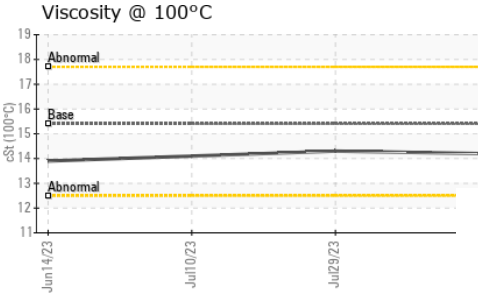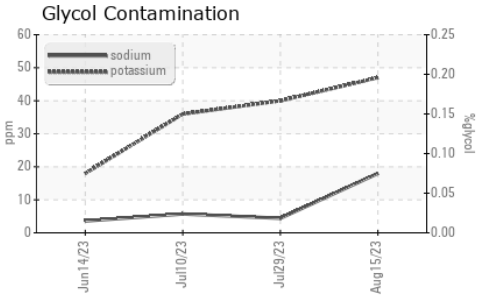

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.3	14.1

## GRAPHS

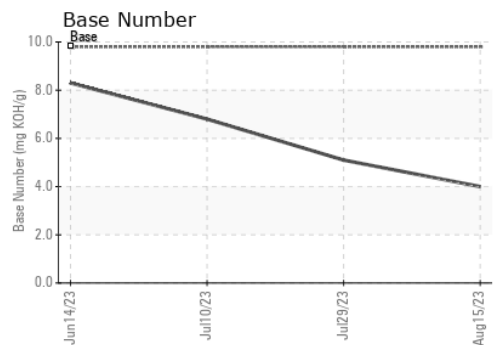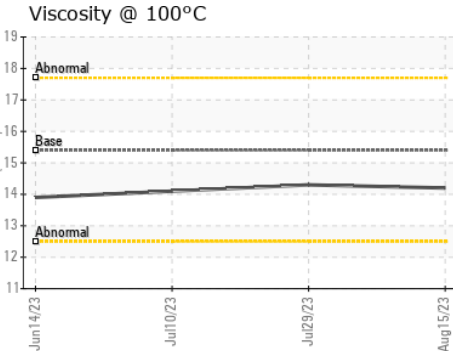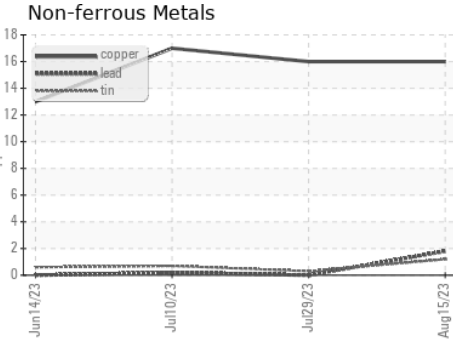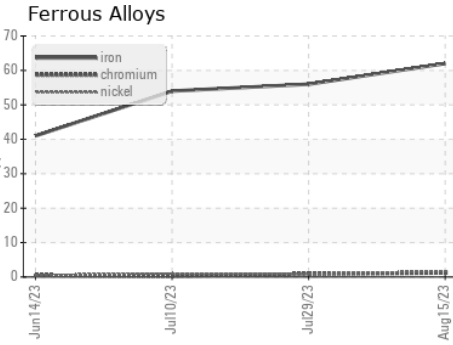

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088765 **Received** : 17 Aug 2023  
**Lab Number** : **05927022** **Diagnosed** : 18 Aug 2023  
**Unique Number** : 10606969 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)