




# OIL ANALYSIS REPORT

Sample Rating Trend

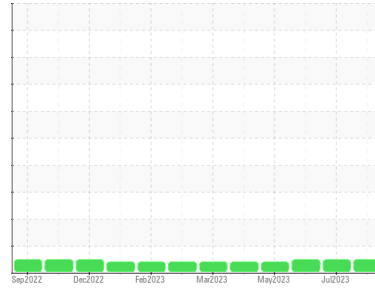

**NORMAL**



Machine Id  
**812042**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0088769</b>	GFL0086113	GFL0083185
Sample Date	Client Info	<b>15 Aug 2023</b>	20 Jul 2023	22 Jun 2023
Machine Age	hrs	<b>4501</b>	4749	4200
Oil Age	hrs	<b>434</b>	682	1036
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	<b>14</b>	8	6
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	3	1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>9</b>	11	18
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	61	63
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>776</b>	785	725
Calcium	ppm	ASTM D5185m 1070	<b>1137</b>	1143	1108
Phosphorus	ppm	ASTM D5185m 1150	<b>910</b>	921	934
Zinc	ppm	ASTM D5185m 1270	<b>1119</b>	1126	1086
Sulfur	ppm	ASTM D5185m 2060	<b>3163</b>	3283	2889

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	<b>6</b>	3	3
Sodium	ppm	ASTM D5185m	<b>3</b>	1	0
Potassium	ppm	ASTM D5185m >20	<b>9</b>	3	3

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.3</b>	6.9	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	17.6	17.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.8</b>	12.3	11.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.5</b>	7.5	7.9







# OIL ANALYSIS REPORT

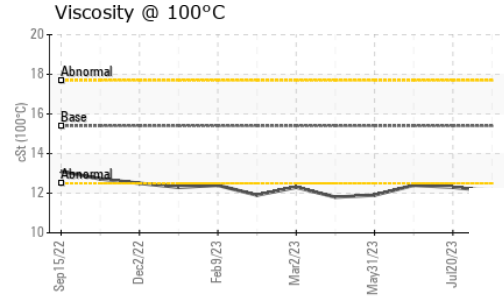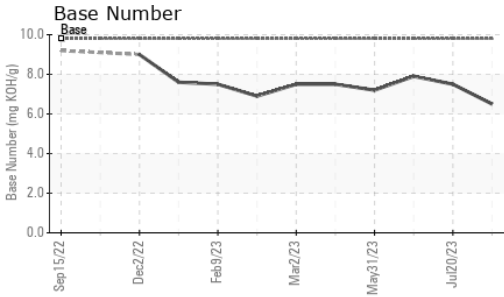

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.1</b>	12.3	12.4

## GRAPHS

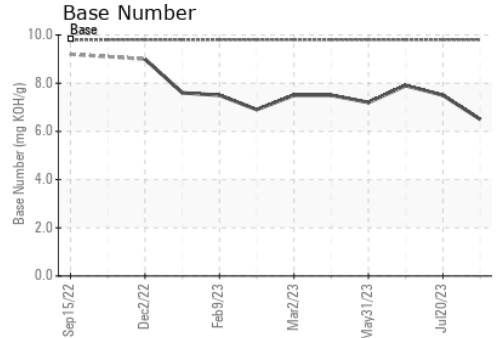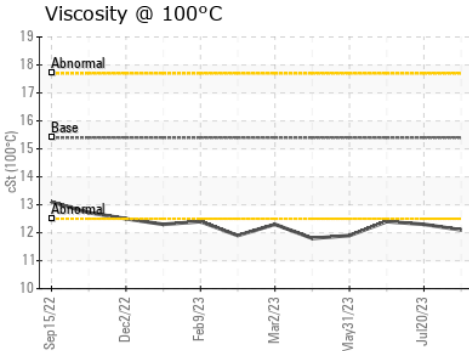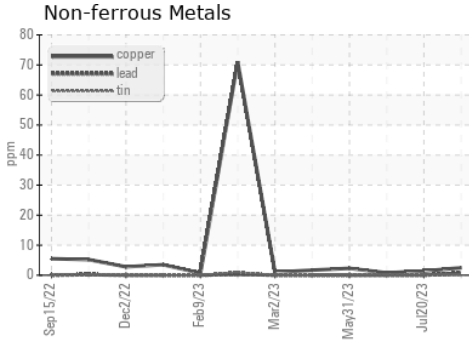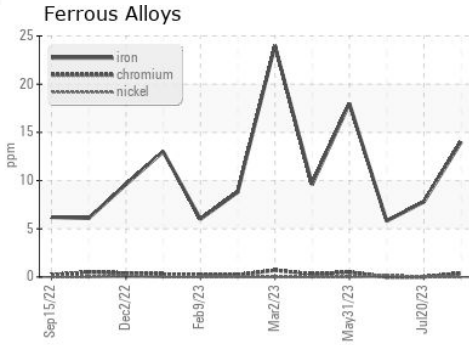

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088769 **Received** : 17 Aug 2023  
**Lab Number** : **05927023** **Diagnosed** : 17 Aug 2023  
**Unique Number** : 10606970 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)