


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

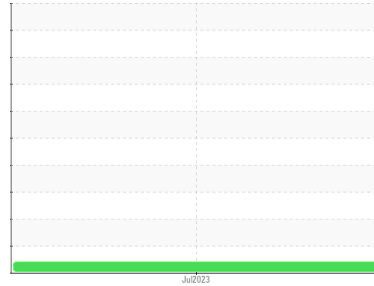

Machine Id
338
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0095375	---	---
Sample Date	Client Info		28 Jul 2023	---	---
Machine Age	mls	Client Info	17757	---	---
Oil Age	mls	Client Info	17757	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	92	---	---
Chromium	ppm	ASTM D5185m >20	3	---	---
Nickel	ppm	ASTM D5185m >4	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	6	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	5	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	43	---	---
Barium	ppm	ASTM D5185m 0	2	---	---
Molybdenum	ppm	ASTM D5185m 60	45	---	---
Manganese	ppm	ASTM D5185m 0	2	---	---
Magnesium	ppm	ASTM D5185m 1010	598	---	---
Calcium	ppm	ASTM D5185m 1070	1667	---	---
Phosphorus	ppm	ASTM D5185m 1150	781	---	---
Zinc	ppm	ASTM D5185m 1270	967	---	---
Sulfur	ppm	ASTM D5185m 2060	2935	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	12	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	1	---	---
Fuel	%	ASTM D3524 >5	0.4	---	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624 >20	9.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.8	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.83	---	---









OIL ANALYSIS REPORT

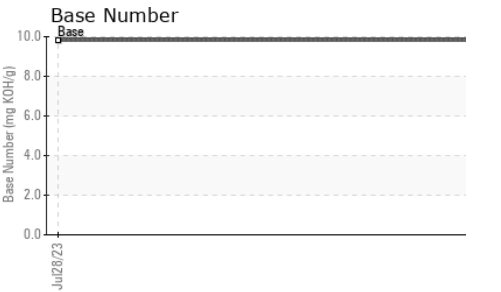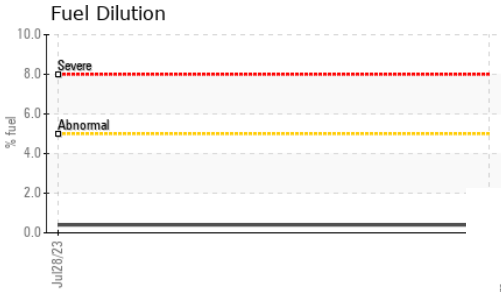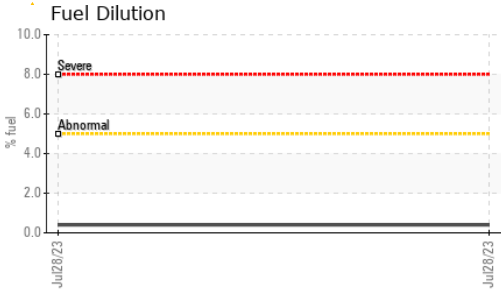

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.7	---

GRAPHS

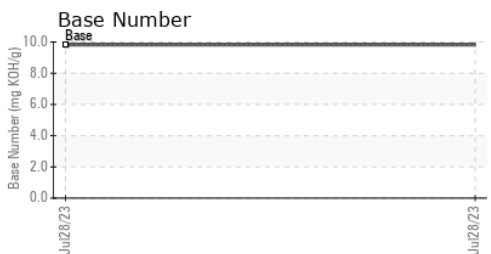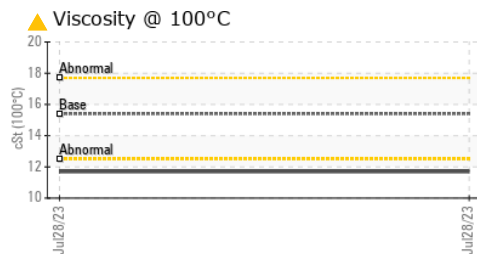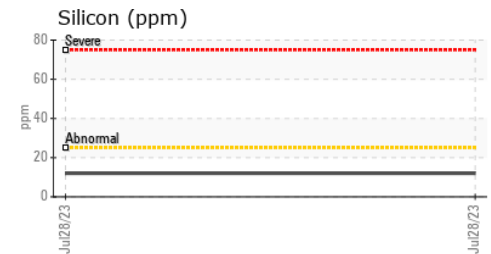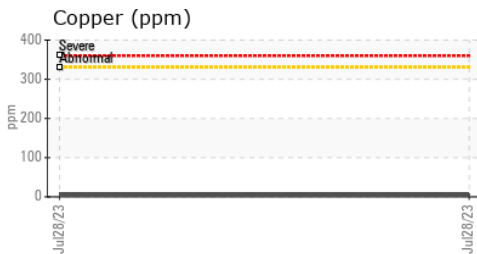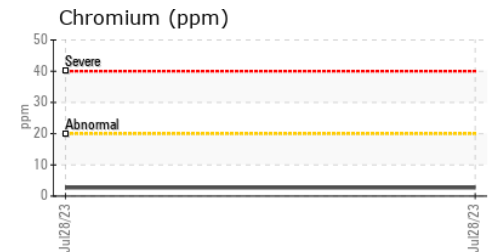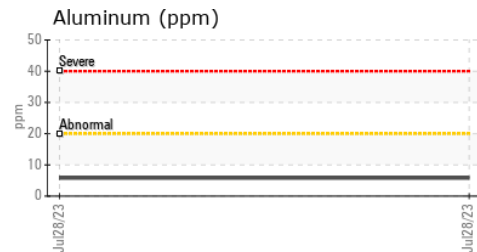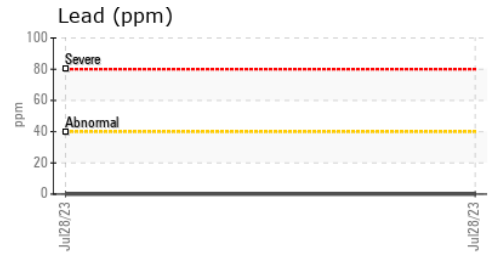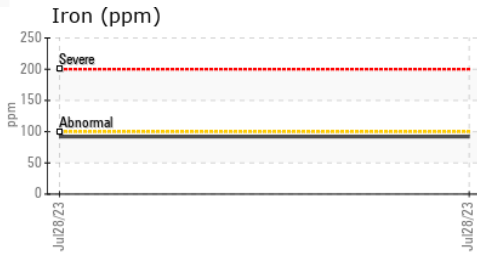

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0095375 **Received** : 17 Aug 2023
Lab Number : **05927440** **Diagnosed** : 21 Aug 2023
Unique Number : 10607387 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

BROWN BUS COMPANY - UPSTATE TRANSIT
 50 VENNERS ROAD
 AMSTERDAM, NY
 US 12010
 Contact: CONNIE WILBUR
 cwilbur@browncoach.com
 T: (518)843-4700
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)