

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id 10690

Component **Transmission (Auto)**

Fluic

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0088713	GFL0086153	GFL0083223
Sample Date		Client Info		16 Aug 2023	14 Jul 2023	23 Jun 2023
Machine Age	hrs	Client Info		19285	19114	18982
Oil Age	hrs	Client Info		456	1347	633
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	105	91	95
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	7	7	5
Lead	ppm	ASTM D5185m	>50	2	<1	2
Copper	ppm	ASTM D5185m		8	7	8
Tin	ppm		>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	nom	ASTM D5185m		74	50	82
Barium	ppm ppm	ASTM D5185m		2	0	0
Molybdenum		ASTM D5185m		2 <1	1	2
,	ppm			<1	1	<1
Manganese	ppm	ASTM D5185m ASTM D5185m		1	10	15
Magnesium	ppm			126	141	15
Calcium	ppm	ASTM D5185m		-		
Phosphorus	ppm	ASTM D5185m		220 4	238 11	233
Zinc Sulfur	ppm ppm	ASTM D5185m ASTM D5185m		4	2310	27 1810
CONTAMINAN		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8	8	8
Sodium	ppm	ASTM D5185m	00	0	2	0
Potassium	ppm	ASTM D5185m	>20	2	2	2
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C 4:52:50) Rev: 1	cSt	ASTM D445	34	33.8	34.0 Submitted By: JC	34.61 SHUA TINKER


Report Id: GFL010 [WUSCAR] 05927649 (Generated: 08/18/2023 14:52:50) Rev: 1



Viscosity @ 40°C

OIL ANALYSIS REPORT

SAMPLE IMAGES

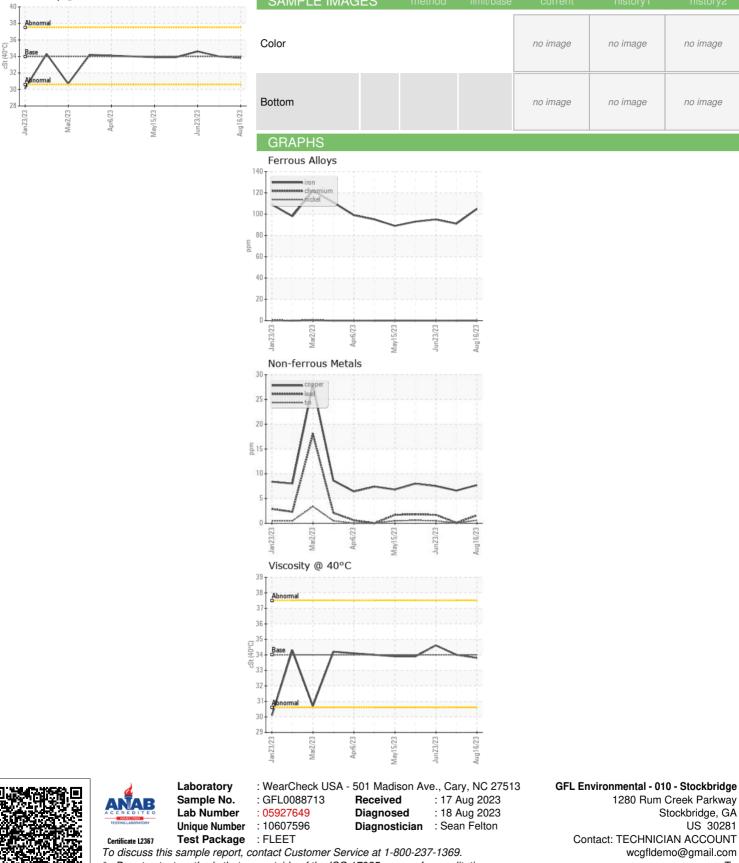

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: JOSHUA TINKER

Page 2 of 2

US 30281

Т:

F:

no image

no image