

# OIL ANALYSIS REPORT

Sample Rating Trend



**DEGRADATION**



Machine Id  
**1693**  
Component  
**Natural Gas Engine**  
Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is above the recommended limit. The BN level is low.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0099793</b>	---	---
Sample Date	Client Info	<b>04 Aug 2023</b>	---	---
Machine Age	mls Client Info	<b>108634</b>	---	---
Oil Age	mls Client Info	<b>3315</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	<b>8</b>	---	---
Chromium ppm ASTM D5185m	>4	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185m	>2	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>0</b>	---	---
Silver ppm ASTM D5185m	>3	<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>9	<b>0</b>	---	---
Lead ppm ASTM D5185m	>30	<b>3</b>	---	---
Copper ppm ASTM D5185m	>35	<b>4</b>	---	---
Tin ppm ASTM D5185m	>4	<b>0</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>10</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>12</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m		<b>62</b>	---	---
Calcium ppm ASTM D5185m		<b>1519</b>	---	---
Phosphorus ppm ASTM D5185m		<b>357</b>	---	---
Zinc ppm ASTM D5185m		<b>458</b>	---	---
Sulfur ppm ASTM D5185m		<b>2725</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>+100	<b>1</b>	---	---
Sodium ppm ASTM D5185m		<b>2</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>0</b>	---	---
Fuel % ASTM D3524	>4.0	<b>0.4</b>	---	---





## INFRA-RED

method	limit/base	current	history1	history2
Soot % *ASTM D7844		<b>0.1</b>	---	---
Nitration Abs/cm *ASTM D7624	>20	<b>11.8</b>	---	---
Sulfation Abs/.1mm *ASTM D7415	>30	<b>24.3</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation Abs/.1mm *ASTM D7414	>25	<b>24.8</b>	---	---
Acid Number (AN) mg KOH/g ASTM D8045		<b>▲ 4.06</b>	---	---
Base Number (BN) mg KOH/g ASTM D2896		<b>▲ 2.44</b>	---	---









# OIL ANALYSIS REPORT

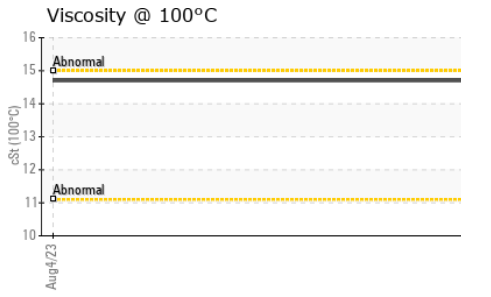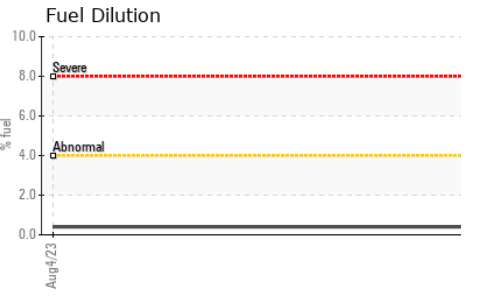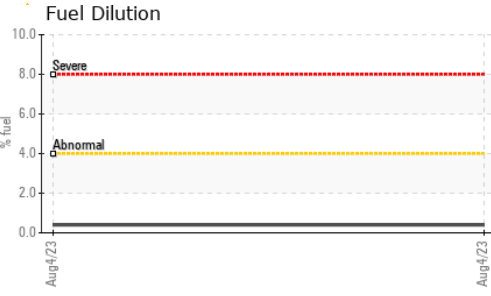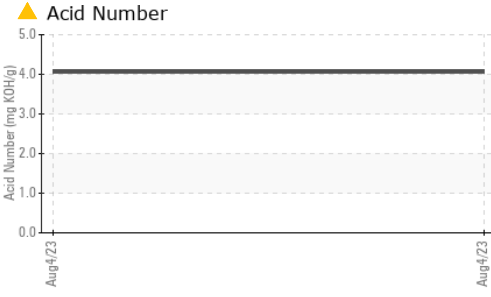

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	---	---

## GRAPHS

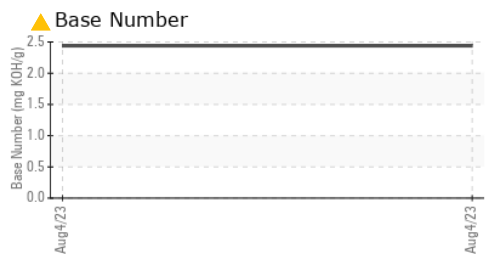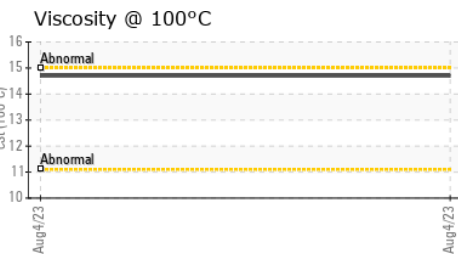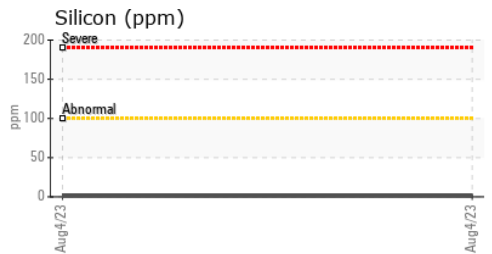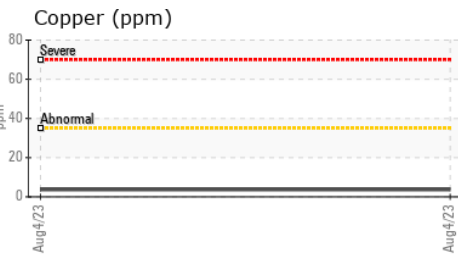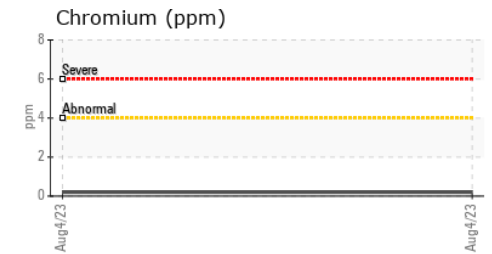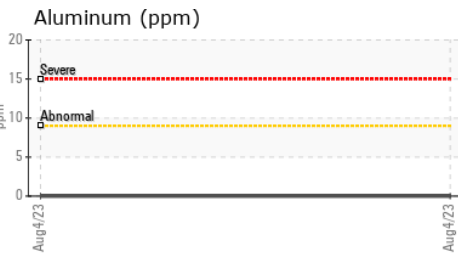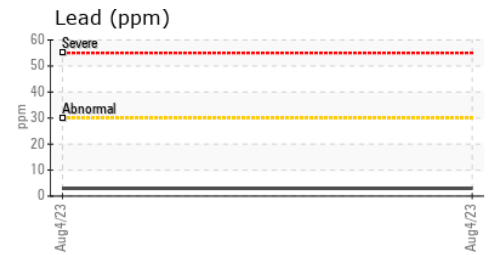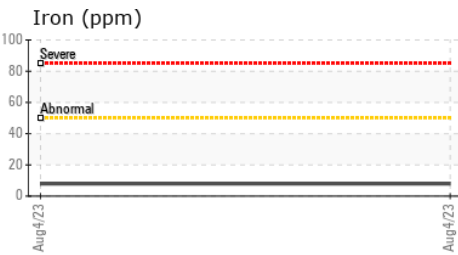

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099793 **Received** : 18 Aug 2023  
**Lab Number** : 05928413 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608360 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**USA COMPRESSION**  
 375 S MAIN STREET  
 MANSFIELD, PA  
 US 16933  
 Contact: JASON KUZNESKI  
 jkuzneski@usacompression.com

*To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*