




# PROBLEM SUMMARY


Sample Rating Trend

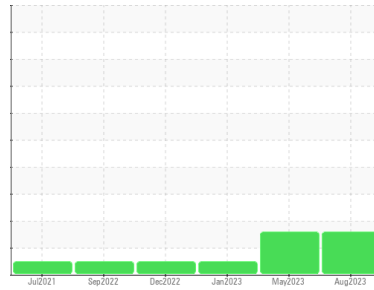

Machine Id  
**727025-594**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

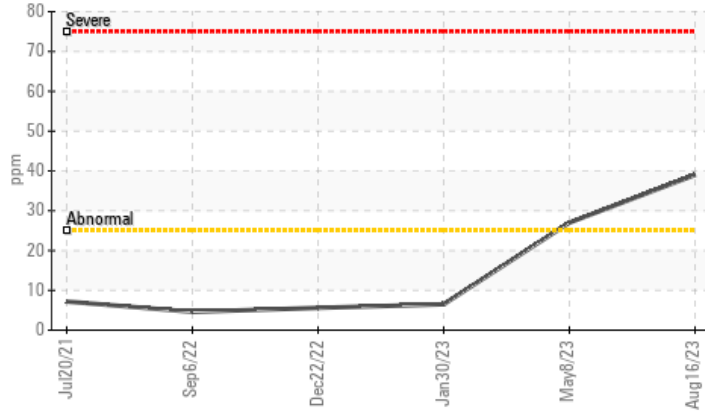

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Hours on last sample should have been 12881 current hours for this sample 13474.. 593 hours on oil change. )

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL
Silicon	ppm	ASTM D5185m	>25	▲ 39	▲ 27	6

Customer Id: GFL625  
 Sample No.: GFL0077543  
 Lab Number: 05928638  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS

### 08 May 2023 Diag: Don Baldrige

DIRT



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Elemental level of silicon (Si) above normal. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 30 Jan 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 22 Dec 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

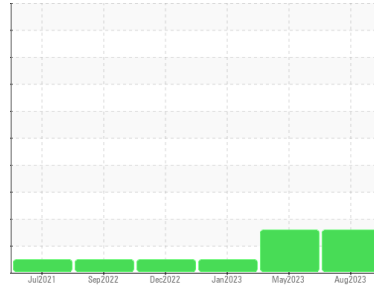

Machine Id  
**727025-594**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Hours on last sample should have been 12881 current hours for this sample 13474.. 593 hours on oil change. )

**Wear**  
 All component wear rates are normal.

**Contamination**  
 Elemental level of silicon (Si) above normal.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0077543</b>	GFL0077527	GFL0060749
Sample Date	Client Info	<b>16 Aug 2023</b>	08 May 2023	30 Jan 2023
Machine Age	hrs	<b>14888</b>	12881	12502
Oil Age	hrs	<b>593</b>	383	12502
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>14</b>	12	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >5	<b>2</b>	0	3
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	5	7
Lead	ppm ASTM D5185m >40	<b>4</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	0	3
Tin	ppm ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	2	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	63	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>972</b>	1036	900
Calcium	ppm ASTM D5185m 1070	<b>1109</b>	1143	1089
Phosphorus	ppm ASTM D5185m 1150	<b>947</b>	1094	1007
Zinc	ppm ASTM D5185m 1270	<b>1210</b>	1348	1205
Sulfur	ppm ASTM D5185m 2060	<b>3038</b>	3656	2885

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 39</b>	▲ 27	6
Sodium	ppm ASTM D5185m	<b>5</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>2</b>	6	17

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	7.3	9.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.3</b>	19.0	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.4</b>	14.5	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.3</b>	8.5	7.5







# OIL ANALYSIS REPORT

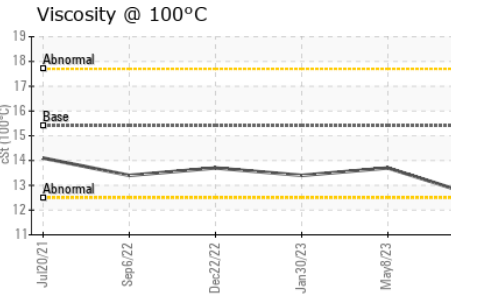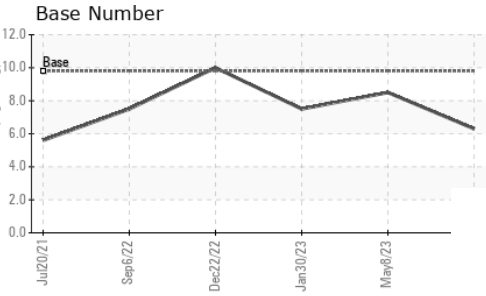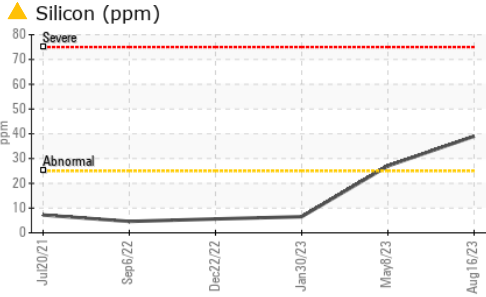

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.6</b>	13.7	13.4

## GRAPHS

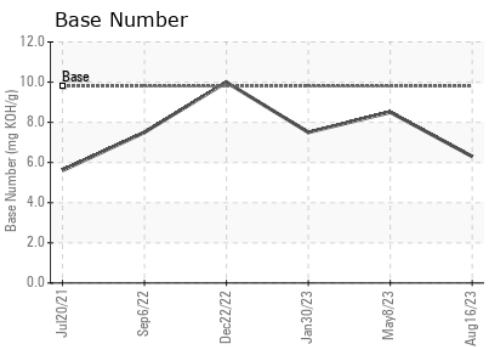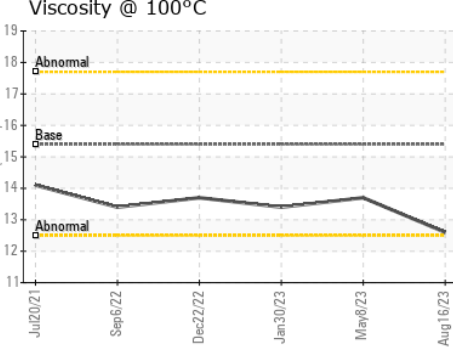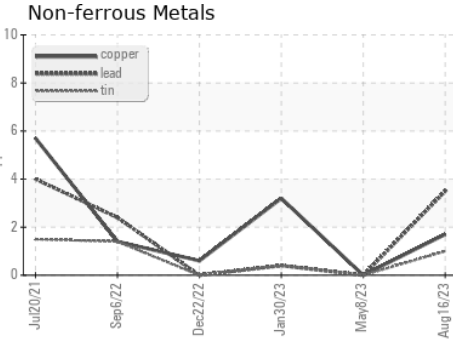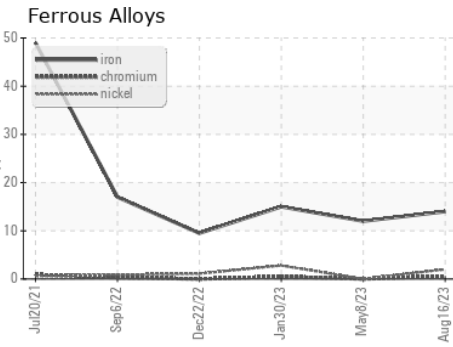

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0077543 **Received** : 18 Aug 2023  
**Lab Number** : **05928638** **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608585 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 4102 Industrial Pkwy  
 Harrison, MI  
 US 48625  
 Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: