

OIL ANALYSIS REPORT







Component Diesel Engine Fluid

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Machine Id

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0099809		
Sample Date		Client Info		25 Jul 2023		
Machine Age	mls	Client Info		144182		
Oil Age	mls	Client Info		5055		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
WEAR METAL	0	mathad	limit/base	ourropt	biotorut	history 0
	5	method		current	history1	history2
Iron	ppm	ASTM D5185m	>100	12		
Chromium	ppm		>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm		>20	<1		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm		>330	1		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
						history2
ADDITIVES		method	IIIII/Dase	current	history1	mstoryz
Boron	ppm	ASTM D5185m	2	12		
	ppm ppm	ASTM D5185m				
Boron		ASTM D5185m	2	12 0 51		
Boron Barium	ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 0	12 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	12 0 51		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	12 0 51 <1 835 1168		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	12 0 51 <1 835 1168 985		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	12 0 51 <1 835 1168 985 1170	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	12 0 51 <1 835 1168 985	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	12 0 51 <1 835 1168 985 1170	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	12 0 51 <1 835 1168 985 1170 3511		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	12 0 51 <1 835 1168 985 1170 3511 current	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	2 0 50 950 1050 995 1180 2600	12 0 51 <1 835 1168 985 1170 3511 current 6	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 limit/base >25	12 0 51 <1 835 1168 985 1170 3511 current 6 2	 history1 	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <i>limit/base</i> >25	12 0 51 <1 835 1168 985 1170 3511 <u>current</u> 6 2 2 <1	 history1 	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base	12 0 51 <1 835 1168 985 1170 3511 current 6 2 <1 <	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	12 0 51 <1 835 1168 985 1170 3511 current 6 2 <1 current 0.3	 history1 history1 	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D51854	2 0 50 950 1050 995 1180 2600 <i>imit/base</i> >25 >20 <i>imit/base</i> >3 >20	12 0 51 <1 835 1168 985 1170 3511 current 6 2 <1 current 0.3 9.1	 history1 history1 	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7844	2 0 0 50 0 950 1050 995 1180 2600 2600 25 20 220 20 20 20 20 20 20 20 20 20 20 20	12 0 51 <1 835 1168 985 1170 3511 current 6 2 <1 current 0.3 9.1 19.6 current	 history1 history1 history1 history1	 history2 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 imit/base >25 imit/base >3 >20	12 0 51 <1 835 1168 985 1170 3511 current 6 2 <1 current 0.3 9.1 19.6	 history1 history1 history1	 history2 history2 history2




OIL ANALYSIS REPORT

VISUAL







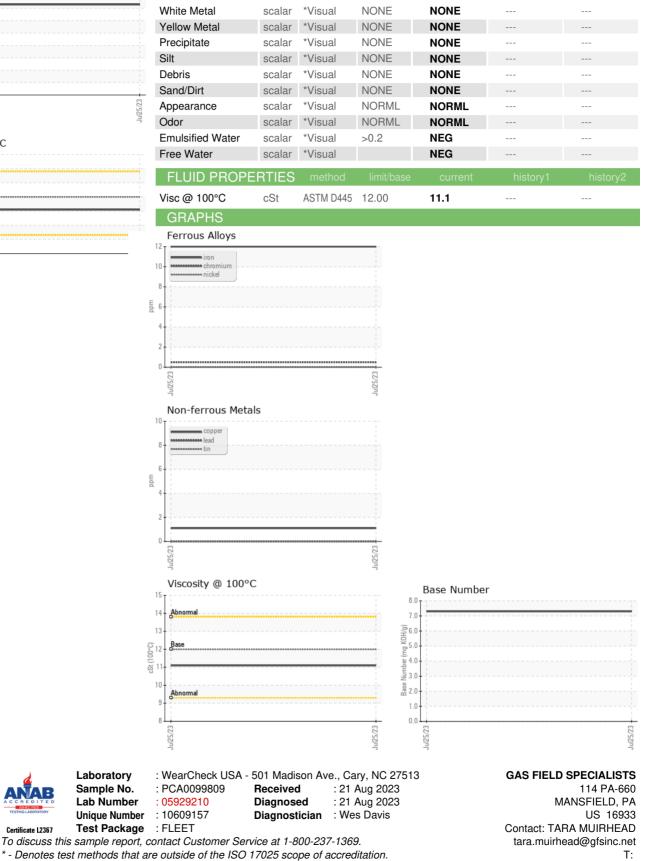

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

- 🔳

Contact/Location: TARA MUIRHEAD - GASMAN

F: