




# OIL ANALYSIS REPORT

Sample Rating Trend

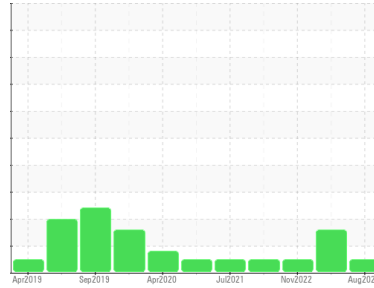

**NORMAL**



Machine Id  
**428035-402343**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0079281</b>	GFL0061276	GFL0051973
Sample Date	Client Info		<b>11 Aug 2023</b>	04 May 2023	17 Nov 2022
Machine Age	hrs	Client Info	<b>10825</b>	10144	9627
Oil Age	hrs	Client Info	<b>681</b>	517	700
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>20</b>	55	84
Chromium	ppm	ASTM D5185m >4	<b>1</b>	3	4
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	5	3
Lead	ppm	ASTM D5185m >45	<b>0</b>	▲ 28	1
Copper	ppm	ASTM D5185m >85	<b>0</b>	▲ 298	2
Tin	ppm	ASTM D5185m >4	<b>0</b>	5	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>85</b>	77	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	4	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1304</b>	1244	861
Calcium	ppm	ASTM D5185m 1070	<b>1389</b>	1401	1029
Phosphorus	ppm	ASTM D5185m 1150	<b>1360</b>	1268	935
Zinc	ppm	ASTM D5185m 1270	<b>1844</b>	1607	1159
Sulfur	ppm	ASTM D5185m 2060	<b>5259</b>	3387	2956

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	28	13
Sodium	ppm	ASTM D5185m	<b>58</b>	17	31
Potassium	ppm	ASTM D5185m >20	<b>0</b>	4	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.5	2.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	12.8	14.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.9</b>	25.3	27.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.0</b>	25.7	23.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	7.9	9.6







# OIL ANALYSIS REPORT

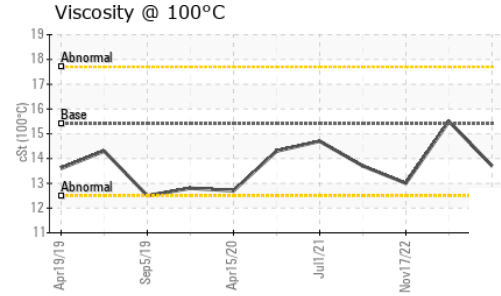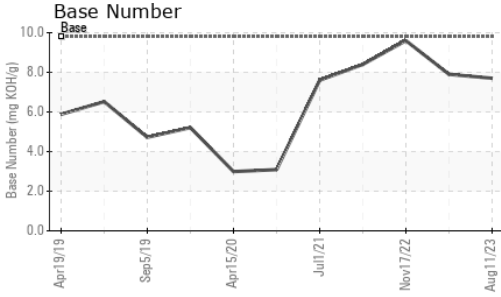

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	15.5

## GRAPHS

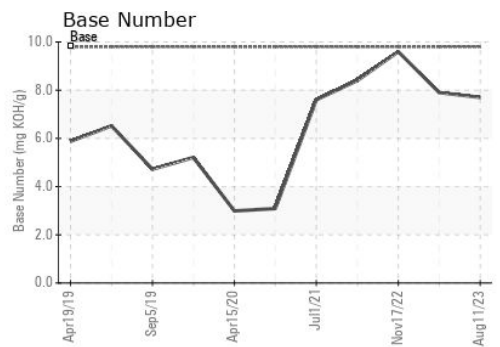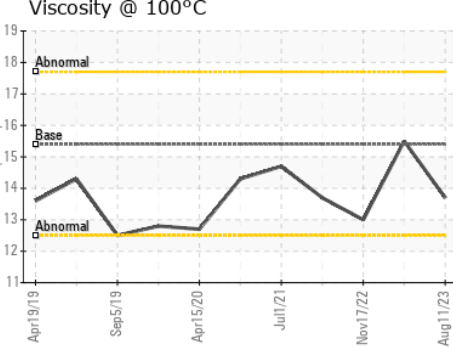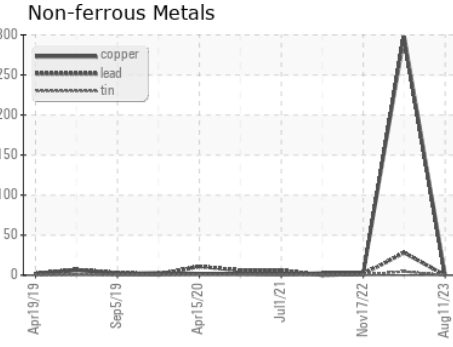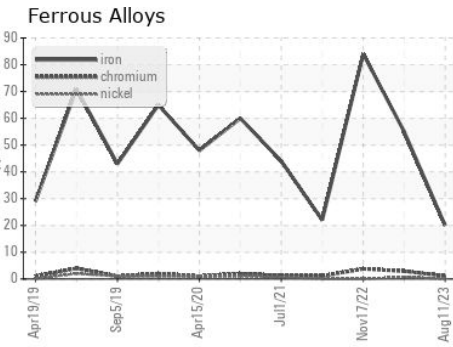

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0079281  
 Lab Number : 05929263  
 Unique Number : 10609210  
 Test Package : FLEET

Received : 21 Aug 2023  
 Diagnosed : 22 Aug 2023  
 Diagnostician : Don Baldrige

GFL Environmental - 822 - Springfield Hauling  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807  
 Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)