

### **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

# Machine Id 810029

Component Diesel Engine

## Fluid PETRO CANADA DURON SHP 15W40 (28 QTS)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0069189	GFL0069161	GFL0069178
Sample Date		Client Info		15 Aug 2023	31 Jul 2023	17 Jul 2023
Machine Age	hrs	Client Info		8654	8541	8440
Oil Age	hrs	Client Info		214	101	305
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0	<b>3</b> .6	▲ 3.4
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	9	5	5
Chromium	ppm	ASTM D5185m		<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		4	2	2
Lead	ppm	ASTM D5185m	>25	4 0	0	0
Copper	ppm	ASTM D5185m		2	<1	1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m	24	0	0	0
Cadmium		ASTM D5185m		0	0	0
	ppm	ASTIVI DJ TOJIII		0	0	-
ADDITIVES		method		current	history1	history2
Boron	ppm	ASTM D5185m	0	6	10	10
Boron Barium	ppm ppm				10 0	10 0
Boron		ASTM D5185m	0	6	10	10 0 56
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0	6 0	10 0	10 0
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	6 0 60	10 0 62	10 0 56
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	6 0 60 <1	10 0 62 <1	10 0 56 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	6 0 60 <1 845	10 0 62 <1 958	10 0 56 <1 886
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	6 0 60 <1 845 983	10 0 62 <1 958 1040	10 0 56 <1 886 949
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	6 0 60 <1 845 983 923	10 0 62 <1 958 1040 1022	10 0 56 <1 886 949 924
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	6 0 60 <1 845 983 923 1123	10 0 62 <1 958 1040 1022 1255	10 0 56 <1 886 949 924 1122
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	6 0 60 <1 845 983 923 1123 3075	10 0 62 <1 958 1040 1022 1255 3698	10 0 56 <1 886 949 924 1122 3363
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	6 0 60 <1 845 983 923 1123 3075 current	10 0 62 <1 958 1040 1022 1255 3698 history1	10 0 56 <1 886 949 924 1122 3363 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	6 0 60 <1 845 983 923 1123 3075 current 1	10 0 62 <1 958 1040 1022 1255 3698 history1 4	10 0 56 <1 886 949 924 1122 3363 history2 3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 0 60 1010 1070 1150 1270 2060 kimit/base >25	6 0 60 <1 845 983 923 1123 3075 current 1 2	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>limit/base</b> >25	6 0 60 <1 845 983 923 1123 3075 current 1 2 5	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3 2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>limit/base</b> >25	6 0 60 <1 845 983 923 1123 3075 current 1 2 5 5 current	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2 2 history1	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3 2 2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >20	6 0 60 <1 845 983 923 1123 3075 <u>current</u> 1 2 5 <u>current</u> 0.6	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2 history1 0.4	10 0 56 <1 886 949 924 1122 3363 history2 3 3 2 history2 0.3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20 <i>limit/base</i> >20	6 0 60 <1 845 983 923 1123 3075 <i>current</i> 1 2 5 <i>current</i> 0.6 8.0	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2 history1 0.4 7.3	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3 2 history2 0.3 6.5
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>imit/base</b> >25 <b>imit/base</b> >6 >20	6 0 60 <1 845 983 923 1123 3075 <u>current</u> 1 2 5 <u>current</u> 0.6 8.0 18.7	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2 2 history1 0.4 7.3 18.5	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3 2 2 history2 0.3 6.5 18.0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844	0 0 0 1010 1070 1150 1270 2060 2060 225 20 220 20 1imit/base >6 >20 >20 30	6 0 60 <1 845 983 923 1123 3075 current 1 2 5 current 0.6 8.0 18.7 current	10 0 62 <1 958 1040 1022 1255 3698 history1 4 3 2 history1 0.4 7.3 18.5 history1	10 0 56 <1 886 949 924 1122 3363 history2 3 3 3 2 history2 0.3 6.5 18.0 history2




# **OIL ANALYSIS REPORT**

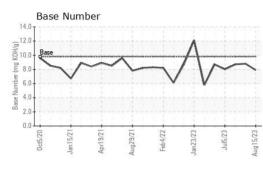


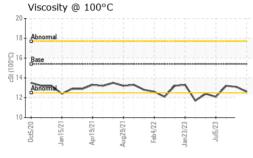

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.6	13.1	13.2
GRAPHS						

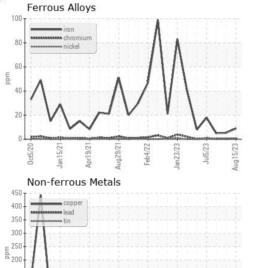

eb4/22

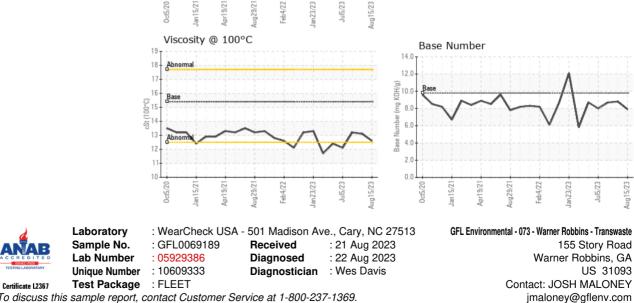

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Т:

F: