




# OIL ANALYSIS REPORT

Sample Rating Trend

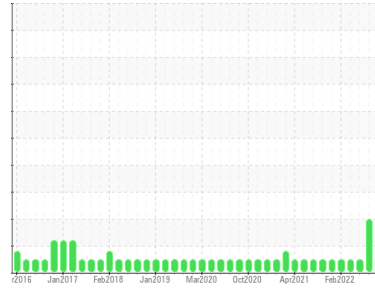

**NORMAL**



Machine Id  
**10502C ISL**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (28 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0089366</b>	GFL0056676	GFL0052281
Sample Date	Client Info		<b>19 Aug 2023</b>	12 Apr 2023	25 Jul 2022
Machine Age	hrs	Client Info	<b>2488</b>	1686	449
Oil Age	hrs	Client Info	<b>0</b>	1606	325
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>16</b>	45	23
Chromium	ppm	ASTM D5185m >4	<b>2</b>	▲ 8	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>4</b>	5	4
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	8	<1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>17</b>	2	9
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>51</b>	54	52
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 560	<b>565</b>	537	499
Calcium	ppm	ASTM D5185m 1510	<b>1586</b>	1605	1576
Phosphorus	ppm	ASTM D5185m 780	<b>761</b>	715	650
Zinc	ppm	ASTM D5185m 870	<b>920</b>	929	946
Sulfur	ppm	ASTM D5185m 2040	<b>2823</b>	3013	2937

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>12</b>	8	19
Sodium	ppm	ASTM D5185m	<b>6</b>	8	7
Potassium	ppm	ASTM D5185m >20	<b>3</b>	6	7

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.0</b>	11.3	12.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	25.8	24.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	21.6	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>6.3</b>	▲ 1.8	4.3








# OIL ANALYSIS REPORT

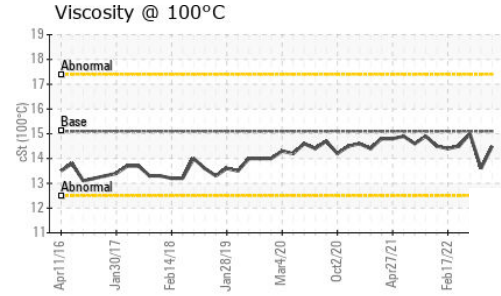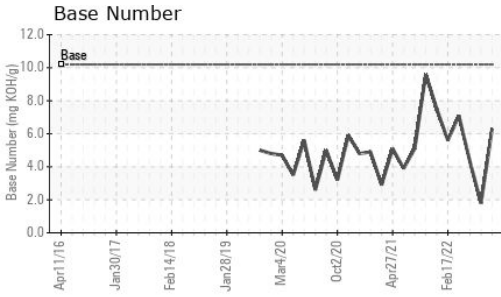

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	13.6

## GRAPHS

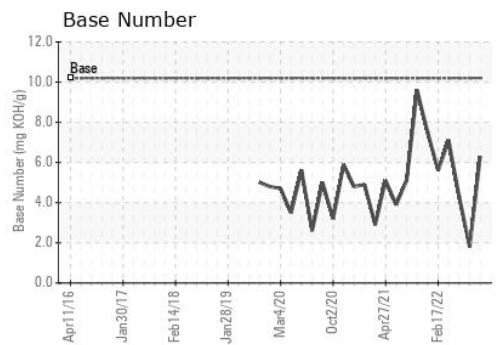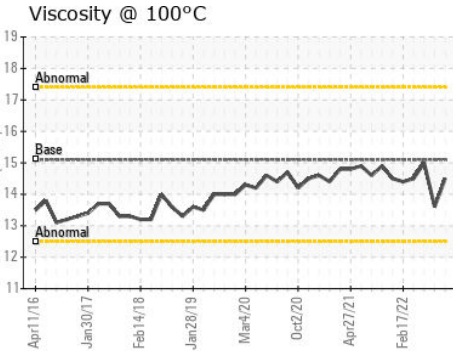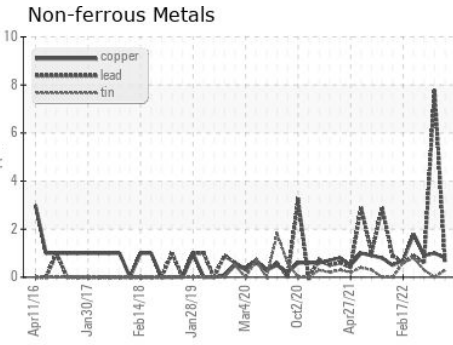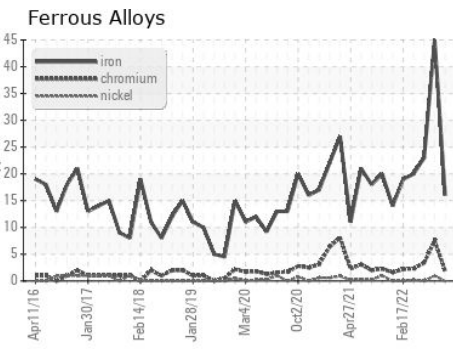

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0089366  
 Lab Number : 05930602  
 Unique Number : 10615873  
 Test Package : FLEET

GFL Environmental - 001 - Raleigh(CNG)  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)