


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **2227005**

Component

Front Differential

GEAR OIL SAE 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The condition of the oil is acceptable for the time in service.

				May2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0099152		
Sample Date		Client Info		25 May 2023		
Machine Age	mls	Client Info		19813		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	92		
Chromium	ppm	ASTM D5185m	>10	2		
Nickel	ppm	ASTM D5185m	>10	5		
Titanium	ppm	ASTM D5185m	7.0	<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	1		
Tin	ppm	ASTM D5185m	>100	<1		
Vanadium	ppm	ASTM D5185m	>10	0		
Cadmium		ASTM D5185m		0		
	ppm	ASTIVI DOTOSIII		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	199		
Barium	ppm	ASTM D5185m	200	0		
Molybdenum	ppm	ASTM D5185m	12	1		
Manganese	ppm	ASTM D5185m		11		
Magnesium	ppm	ASTM D5185m	12	0		
Calcium	ppm	ASTM D5185m	150	17		
Phosphorus	ppm	ASTM D5185m	1650	1133		
Zinc	ppm	ASTM D5185m	125	22		
Sulfur	ppm	ASTM D5185m	22500	28218		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	53		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	3		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE		method	limit/base	current	history1	history2
						,-

Visc @ 40°C

cSt

ASTM D445 109

Report Id: PERBRIDE [WUSCAR] 05931068 (Generated: 08/25/2023 13:00:34) Rev: 1

Contact/Location: GEORGE LACATES - PERBRIDE




OIL ANALYSIS REPORT





GRAPHS

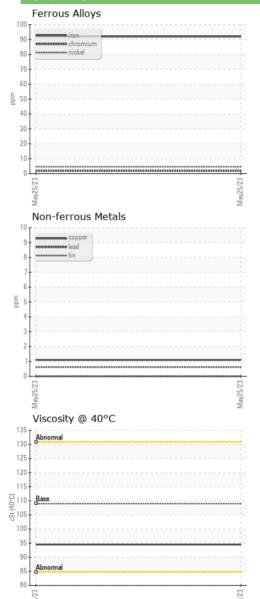





Laboratory Sample No. Lab Number Unique Number : 10616339

: 05931068

: PCA0099152

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 22 Aug 2023

Diagnosed : 23 Aug 2023 Diagnostician : Don Baldridge PERDUE FARMS - BRIDGEVILLE

8634 E NEWTON RD BRIDGEVILLE, DE US 19933

Contact: GEORGE LACATES

Test Package : FLEET Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: