


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
1926730
 Component
2 Differential
 Fluid
GEAR OIL SAE 75W90 (20 QTS)

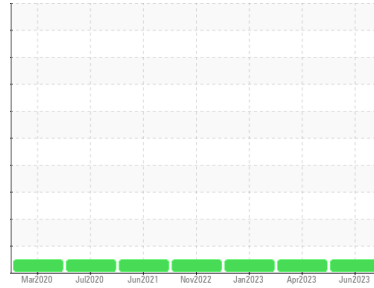

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0100730	PCA0094882	PCA0091079
Sample Date	Client Info	26 Jun 2023	03 Apr 2023	23 Jan 2023
Machine Age	hrs	Client Info	212719	193435
Oil Age	hrs	Client Info	212719	193435
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >500	108	101	102
Chromium	ppm	ASTM D5185m >10	<1	<1	1
Nickel	ppm	ASTM D5185m >10	8	8	8
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	3	3
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 400	319	265	293
Barium	ppm	ASTM D5185m 200	0	0	0
Molybdenum	ppm	ASTM D5185m 12	0	<1	<1
Manganese	ppm	ASTM D5185m	10	9	8
Magnesium	ppm	ASTM D5185m 12	0	3	2
Calcium	ppm	ASTM D5185m 150	10	9	11
Phosphorus	ppm	ASTM D5185m 1650	1371	1377	1293
Zinc	ppm	ASTM D5185m 125	18	16	22
Sulfur	ppm	ASTM D5185m 22500	27029	29096	22551

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >75	17	16	16
Sodium	ppm	ASTM D5185m	9	9	9
Potassium	ppm	ASTM D5185m >20	1	2	2


VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES




method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445 109	104	104	104

OIL ANALYSIS REPORT

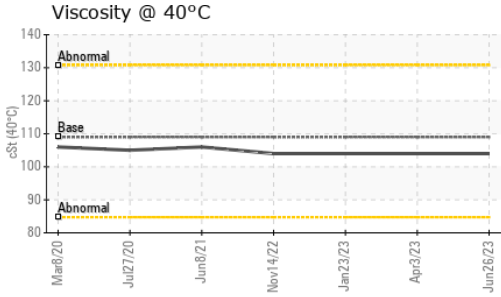

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

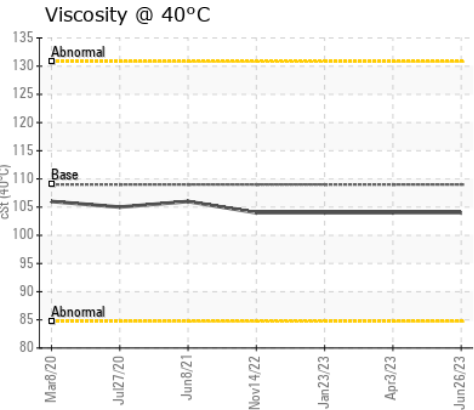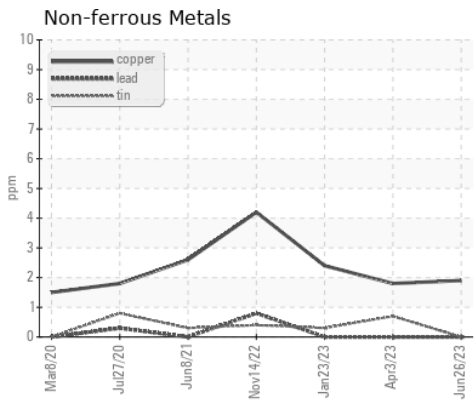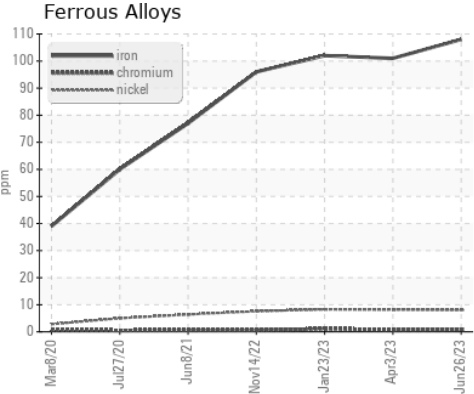

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0100730 **Received** : 22 Aug 2023
Lab Number : 05931190 **Diagnosed** : 23 Aug 2023
Unique Number : 10616461 **Diagnostician** : Don Baldrige
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: