


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

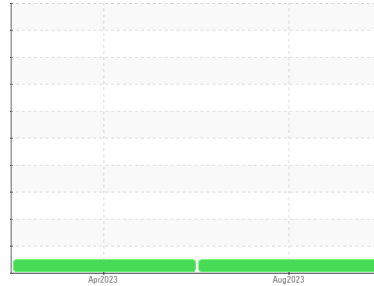

Area  
**(89778X) Walgreens**  
 Machine Id  
**[Walgreens] 136A69022**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0093787</b>	PCA0093759	---
Sample Date	Client Info			<b>09 Aug 2023</b>	18 Apr 2023	---
Machine Age	mls	Client Info		<b>547695</b>	523118	---
Oil Age	mls	Client Info		<b>50000</b>	25000	---
Oil Changed	Client Info			<b>Changed</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>29</b>	19	---
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>4</b>	3	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>65</b>	61	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>956</b>	916	---
Calcium	ppm	ASTM D5185m	1050	<b>1144</b>	1071	---
Phosphorus	ppm	ASTM D5185m	995	<b>1044</b>	1007	---
Zinc	ppm	ASTM D5185m	1180	<b>1259</b>	1219	---
Sulfur	ppm	ASTM D5185m	2600	<b>2938</b>	2827	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	4	---
Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	6.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.7</b>	18.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.2</b>	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.5</b>	7.9	---





# OIL ANALYSIS REPORT

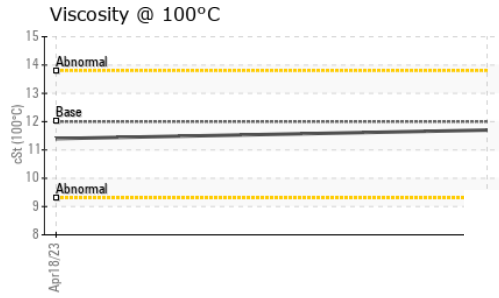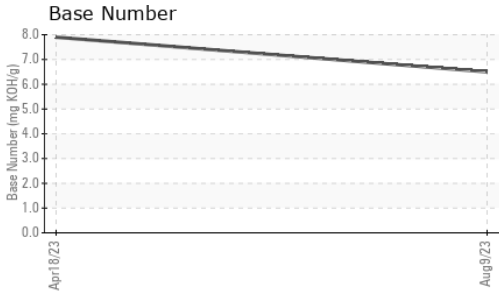

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.7</b>	11.4	---

## GRAPHS

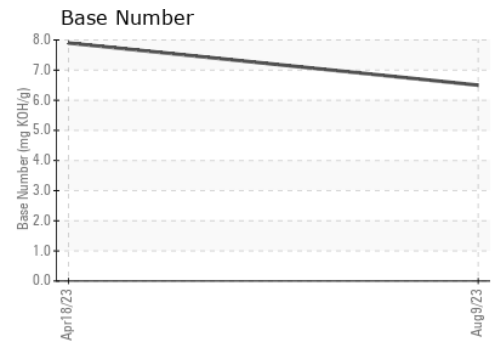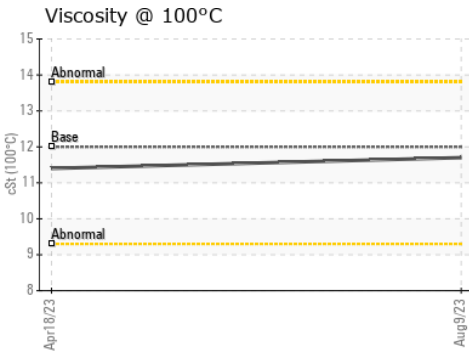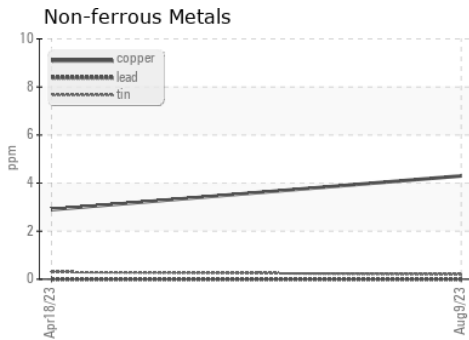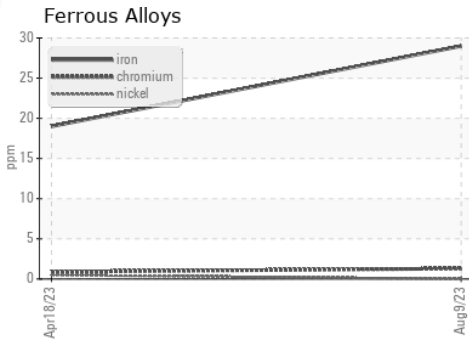

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093787 **Received** : 23 Aug 2023  
**Lab Number** : **05932686** **Diagnosed** : 24 Aug 2023  
**Unique Number** : 10617957 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)