




# OIL ANALYSIS REPORT

## Sample Rating Trend

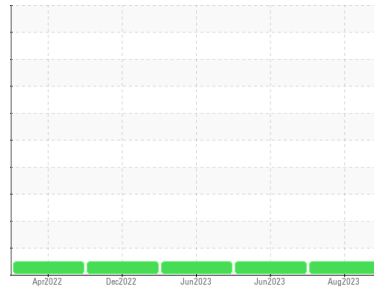

**NORMAL**



Machine Id  
**728027**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0091493</b>	GFL0082741	GFL0082773	
Sample Date	Client Info	<b>16 Aug 2023</b>	26 Jun 2023	20 Jun 2023	
Machine Age	hrs	Client Info	<b>10959</b>	10611	10562
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>3</b>	3	10
Chromium	ppm ASTM D5185m >4	<b>0</b>	0	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >25	<b>0</b>	<1	6
Lead	ppm ASTM D5185m >45	<b>0</b>	0	1
Copper	ppm ASTM D5185m >85	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	3	3
Barium	ppm ASTM D5185m 0	<b>2</b>	0	4
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>929</b>	910	1009
Calcium	ppm ASTM D5185m 1070	<b>1161</b>	1092	1134
Phosphorus	ppm ASTM D5185m 1150	<b>1093</b>	1025	1089
Zinc	ppm ASTM D5185m 1270	<b>1279</b>	1231	1315
Sulfur	ppm ASTM D5185m 2060	<b>3379</b>	3329	3800

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>2</b>	2	3
Sodium	ppm ASTM D5185m	<b>0</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	3	6

### INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.1	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>6.9</b>	5.4	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.0</b>	18.2	19.1

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>12.9</b>	13.8	15.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	9.4	8.1







# OIL ANALYSIS REPORT

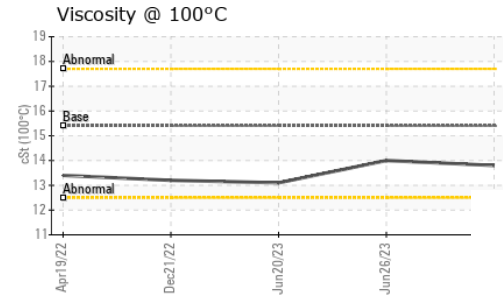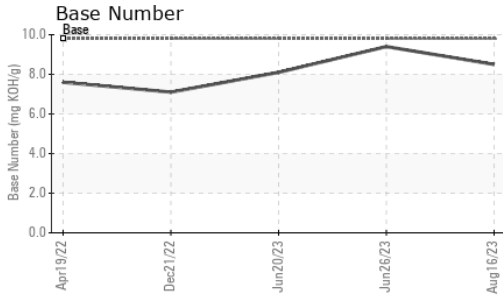

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.0	13.1

## GRAPHS

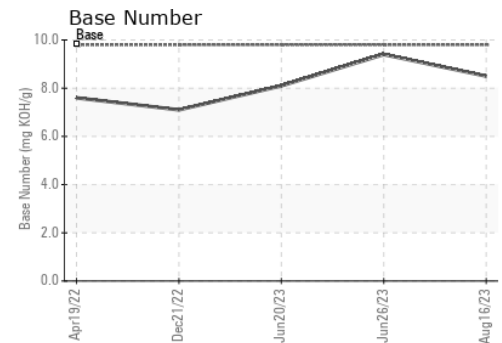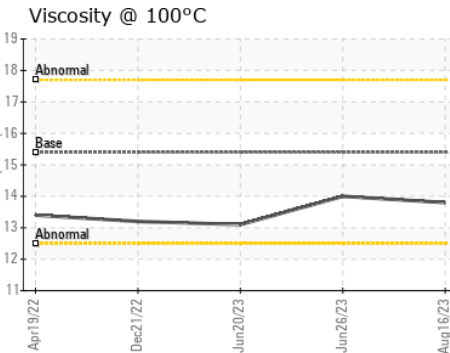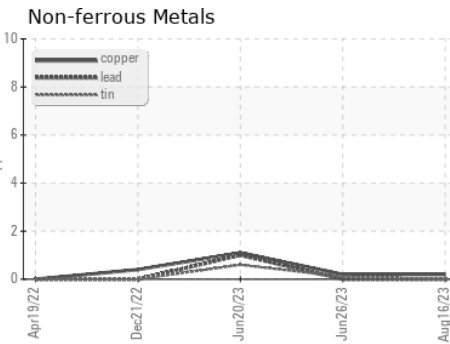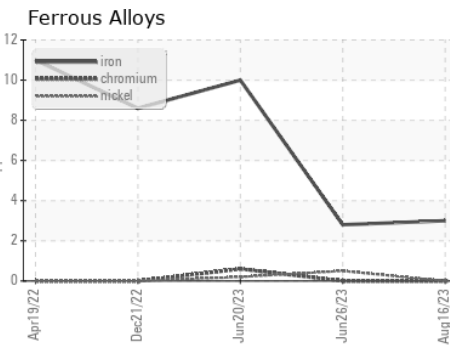

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091493 **Received** : 23 Aug 2023  
**Lab Number** : **05932697** **Diagnosed** : 24 Aug 2023  
**Unique Number** : 10617968 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340

Contact: Ricky Matthews  
 rickymathews@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (586)825-9514

F: