


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

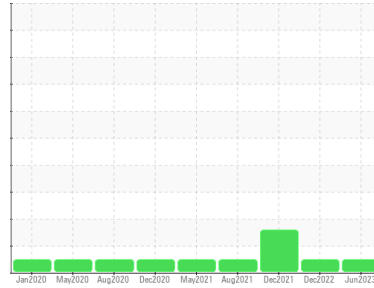

Machine Id  
**514**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (11 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0069600</b>	PCA0069287	PCA0053005
Sample Date	Client Info	<b>05 Jun 2023</b>	19 Dec 2022	22 Dec 2021
Machine Age	hrs	<b>13267</b>	9402	9402
Oil Age	hrs	<b>609</b>	9402	9402
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>10</b>	14	12
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	2	3
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	4	1
Copper	ppm ASTM D5185m >330	<b>2</b>	3	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>2</b>	4	5
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>63</b>	63	64
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>1035</b>	1047	1014
Calcium	ppm ASTM D5185m	<b>1189</b>	1239	1109
Phosphorus	ppm ASTM D5185m	<b>1074</b>	1071	1088
Zinc	ppm ASTM D5185m	<b>1332</b>	1422	1235
Sulfur	ppm ASTM D5185m	<b>3692</b>	3829	2779

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	11	▲ 47
Sodium	ppm ASTM D5185m	<b>2</b>	1	2
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	4	3



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>9.1</b>	10.0	9.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.4</b>	21.1	22.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.6</b>	18.6	19.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	8.1	8.9





# OIL ANALYSIS REPORT

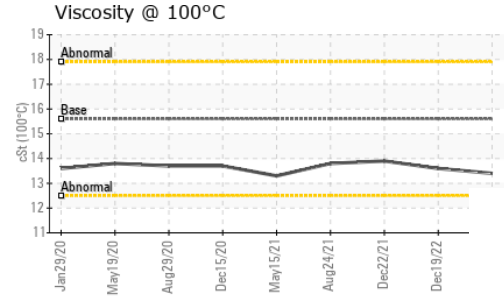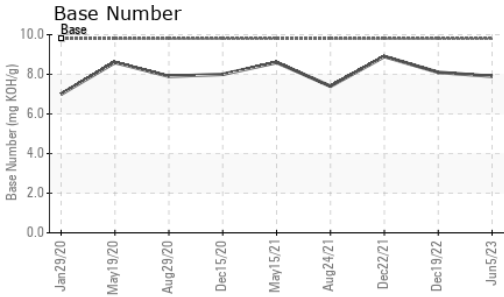

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.6	13.9

## GRAPHS

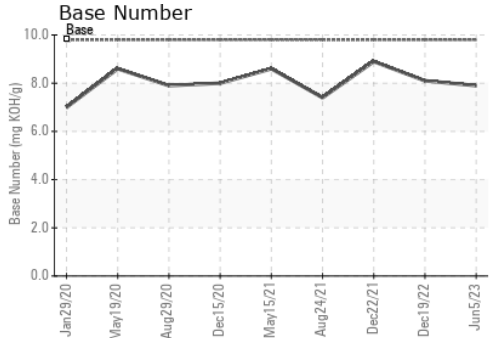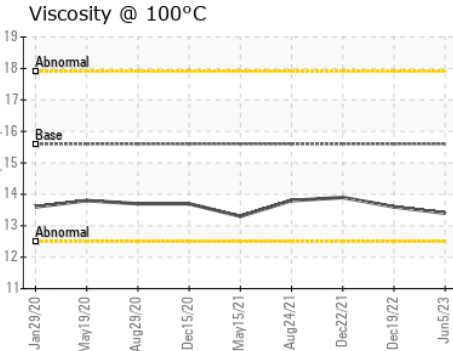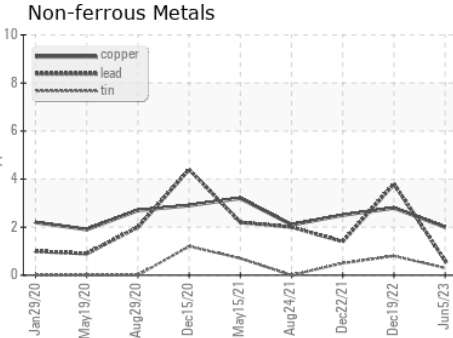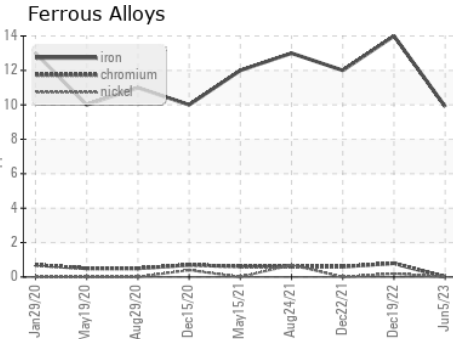

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0069600 **Received** : 25 Aug 2023  
**Lab Number** : **05934692** **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10619963 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**AVR - APPLE VALLEY READY MIX**  
 14698 GALAXY AVE  
 APPLE VALLEY, MN  
 US 55124  
 Contact: senia zimmer  
 avrconcrete.senia@gmail.com  
 T: (952)953-2992  
 F: (952)953-2994

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)