


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

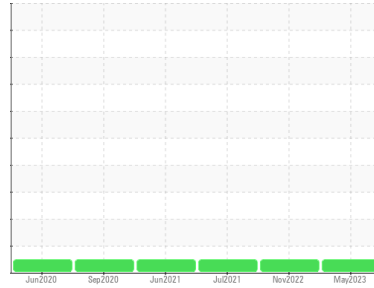

Machine Id  
**567**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0069521</b>	PCA0069255	PCA0043232
Sample Date	Client Info			<b>23 May 2023</b>	04 Nov 2022	19 Jul 2021
Machine Age	hrs	Client Info		<b>6769</b>	3796	0
Oil Age	hrs	Client Info		<b>550</b>	3796	0
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>15</b>	14	18
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	9	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>4</b>	5	7
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>67</b>	63	66
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>1057</b>	1047	966
Calcium	ppm	ASTM D5185m		<b>1211</b>	1294	1136
Phosphorus	ppm	ASTM D5185m		<b>1149</b>	1065	1050
Zinc	ppm	ASTM D5185m		<b>1404</b>	1432	1257
Sulfur	ppm	ASTM D5185m		<b>3923</b>	3859	2715

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	4
Sodium	ppm	ASTM D5185m		<b>1</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	23	18

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	9.1	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	20.9	20.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.8</b>	17.5	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.2</b>	7.8	7.9





# OIL ANALYSIS REPORT

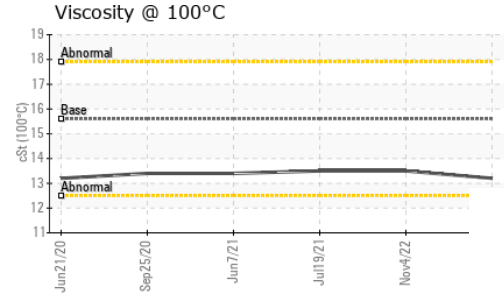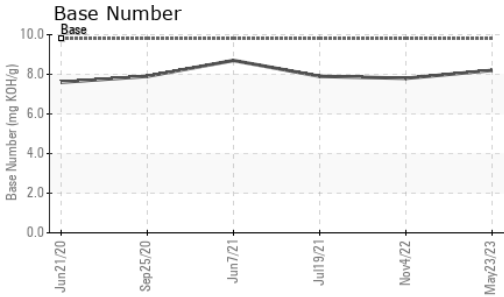

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.2</b>	13.5	13.5

## GRAPHS

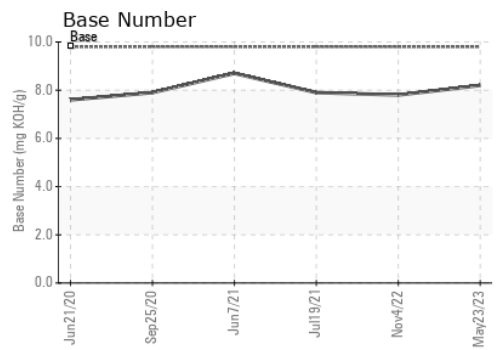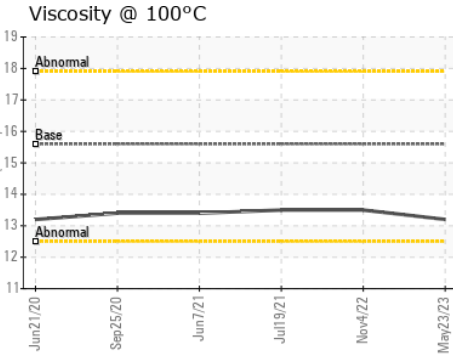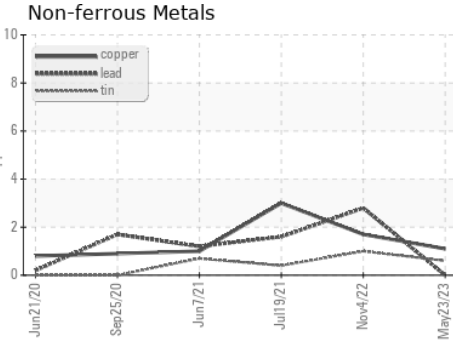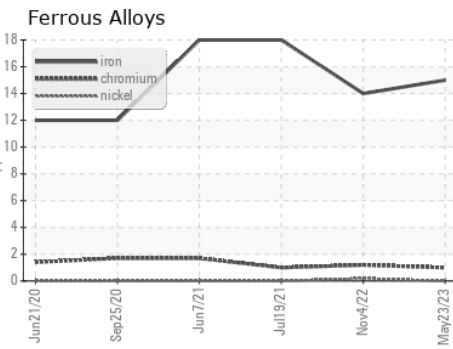

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0069521 **Received** : 25 Aug 2023  
**Lab Number** : **05934713** **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10619984 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**AVR - APPLE VALLEY READY MIX**  
 14698 GALAXY AVE  
 APPLE VALLEY, MN  
 US 55124  
 Contact: senia zimmer  
 avrconcrete.senia@gmail.com  
 T: (952)953-2992  
 F: (952)953-2994

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)