




# OIL ANALYSIS REPORT

Sample Rating Trend

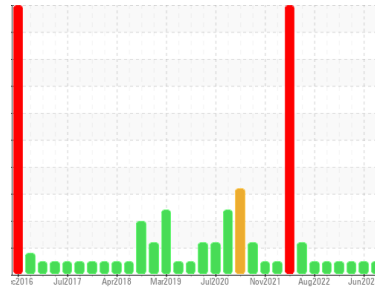

**NORMAL**



Machine Id  
**10673**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (34 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0091182</b>	GFL0076981	GFL0076944
Sample Date	Client Info	<b>23 Aug 2023</b>	22 Jun 2023	21 Apr 2023
Machine Age	hrs	<b>0</b>	0	10227
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>31</b>	34	45
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>6</b>	3	5
Lead	ppm ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm ASTM D5185m >100	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	8	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>66</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm ASTM D5185m 1010	<b>1037</b>	940	860
Calcium	ppm ASTM D5185m 1070	<b>1196</b>	1028	992
Phosphorus	ppm ASTM D5185m 1150	<b>1125</b>	993	926
Zinc	ppm ASTM D5185m 1270	<b>1401</b>	1232	1183
Sulfur	ppm ASTM D5185m 2060	<b>3866</b>	3497	2960

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	6	6
Sodium	ppm ASTM D5185m	<b>19</b>	24	45
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	0

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.9</b>	2	2.8
Nitration	Abs/cm *ASTM D7624 >20	<b>8.3</b>	10.1	11.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.3</b>	23.3	25.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.5</b>	18.4	19.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	8.6	6.8







# OIL ANALYSIS REPORT

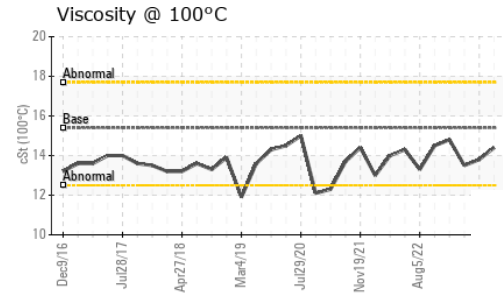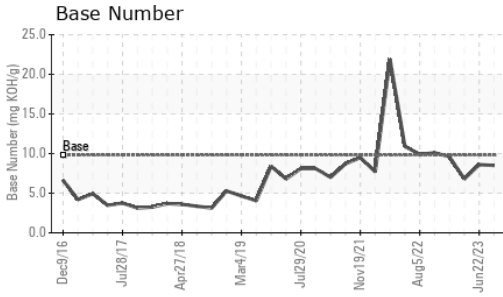

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	13.8	13.5

## GRAPHS

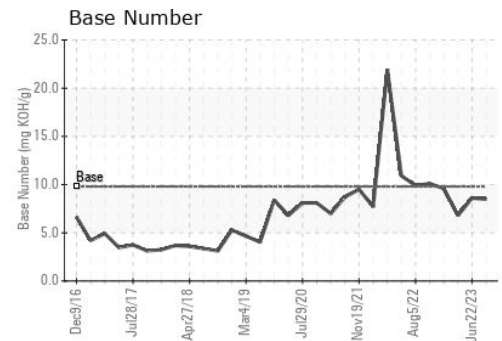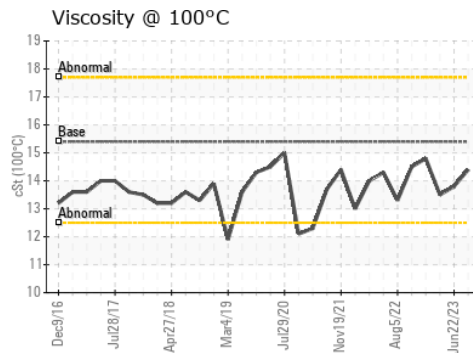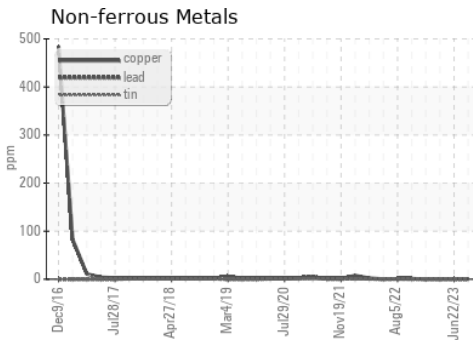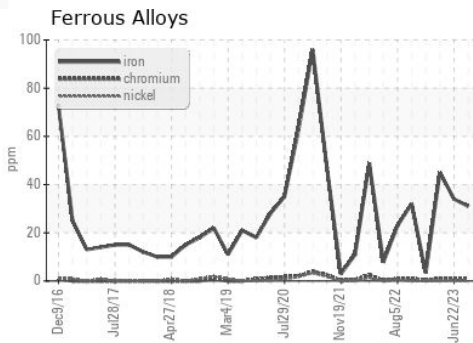

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091182 **Received** : 25 Aug 2023  
**Lab Number** : **05934721** **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10619992 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 020 - Alamance**  
 703 East Gilbreath St  
 Graham, NC  
 US 27253  
 Contact:  
 richard.belcher@gflenv.com  
 T: (800)207-6618  
 F: (336)229-0526

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)