




OIL ANALYSIS REPORT

Sample Rating Trend

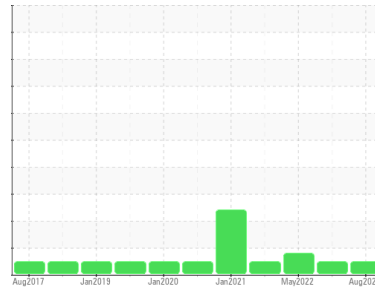

NORMAL



Machine Id
9144
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0083446	GFL0083432	GFL0048920
Sample Date	Client Info	18 Aug 2023	25 May 2023	19 May 2022
Machine Age	hrs Client Info	15660	15083	0
Oil Age	hrs Client Info	15660	15083	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	18	34	▲ 66
Chromium ppm ASTM D5185m	>5	2	2	3
Nickel ppm ASTM D5185m	>4	<1	2	1
Titanium ppm ASTM D5185m	>5	0	<1	0
Silver ppm ASTM D5185m	>3	0	0	0
Aluminum ppm ASTM D5185m	>25	15	14	20
Lead ppm ASTM D5185m	>40	0	1	2
Copper ppm ASTM D5185m	>150	2	7	23
Tin ppm ASTM D5185m	>4	<1	<1	<1
Antimony ppm ASTM D5185m		---	---	0
Vanadium ppm ASTM D5185m		0	<1	0
Beryllium ppm ASTM D5185m		---	---	0
Cadmium ppm ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	15	14	11
Barium ppm ASTM D5185m	0	0	0	0
Molybdenum ppm ASTM D5185m	60	56	53	56
Manganese ppm ASTM D5185m	0	<1	<1	<1
Magnesium ppm ASTM D5185m	1010	697	631	621
Calcium ppm ASTM D5185m	1070	1750	1558	1509
Phosphorus ppm ASTM D5185m	1150	880	809	779
Zinc ppm ASTM D5185m	1270	1107	1055	943
Sulfur ppm ASTM D5185m	2060	3232	2578	2033
Lithium ppm ASTM D5185m		---	---	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	5	5	7
Sodium ppm ASTM D5185m		5	6	9
Potassium ppm ASTM D5185m	>20	0	3	<1

INFRA-RED



method	limit/base	current	history1	history2
Soot % *ASTM D7844		0	0	0
Nitration Abs/cm *ASTM D7624	>20	8.6	9.8	8.3
Sulfation Abs/.1mm *ASTM D7415	>30	19.8	20.5	20.7

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation Abs/.1mm *ASTM D7414	>25	17.0	16.3	13.0
Base Number (BN) mg KOH/g ASTM D2896	9.8	6.9	6.4	---







OIL ANALYSIS REPORT

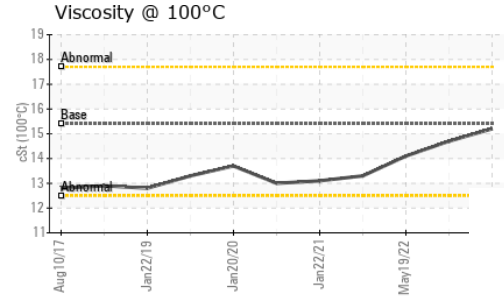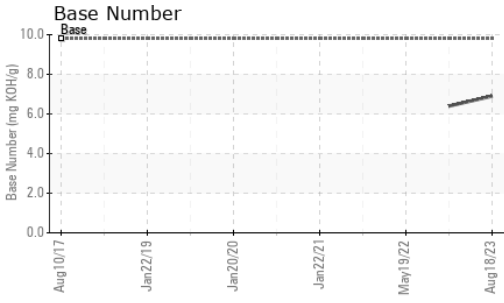

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	15.2	14.7	14.1

GRAPHS

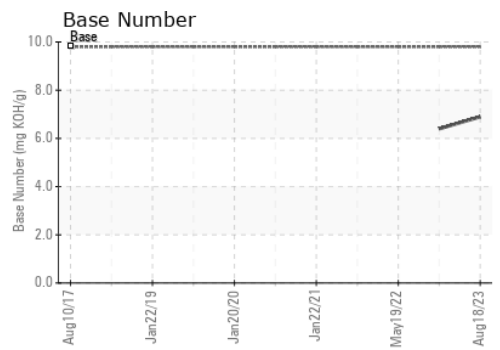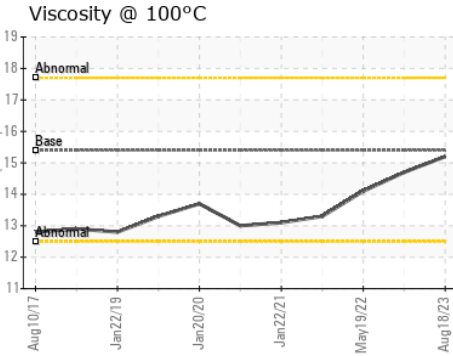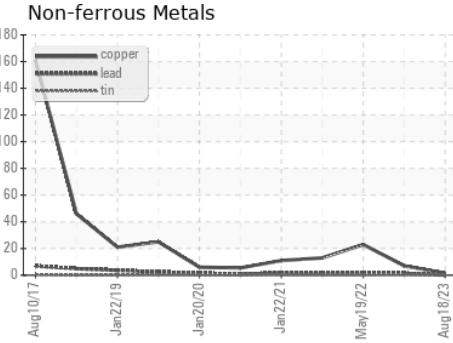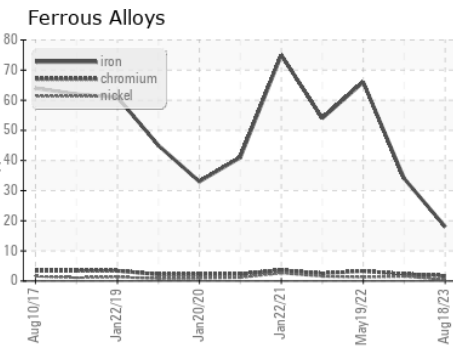

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0083446 **Received** : 25 Aug 2023
Lab Number : **05934753** **Diagnosed** : 25 Aug 2023
Unique Number : 10620024 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Jose Gonzalez
 jgonzalez2@gflenv.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)