




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**725055-870022**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

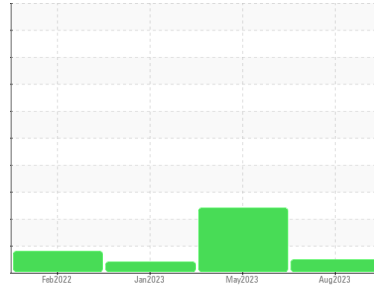

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0083453</b>	GFL0074220	GFL0065159
Sample Date	Client Info		<b>14 Aug 2023</b>	08 May 2023	13 Jan 2023
Machine Age	hrs	Client Info	<b>18484</b>	1964	17958
Oil Age	hrs	Client Info	<b>18484</b>	1964	966
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	0.7
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>41</b>	▲ 95	18
Chromium	ppm	ASTM D5185m >5	<b>2</b>	▲ 6	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>8</b>	10	6
Lead	ppm	ASTM D5185m >30	<b>0</b>	2	1
Copper	ppm	ASTM D5185m >150	<b>90</b>	▲ 320	19
Tin	ppm	ASTM D5185m >5	<b>1</b>	3	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	9	61
Barium	ppm	ASTM D5185m 0	<b>0</b>	5	8
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	63	45
Manganese	ppm	ASTM D5185m 0	<b>1</b>	3	7
Magnesium	ppm	ASTM D5185m 1010	<b>1071</b>	888	485
Calcium	ppm	ASTM D5185m 1070	<b>1285</b>	1303	1602
Phosphorus	ppm	ASTM D5185m 1150	<b>1132</b>	1036	1024
Zinc	ppm	ASTM D5185m 1270	<b>1437</b>	1265	1222
Sulfur	ppm	ASTM D5185m 2060	<b>3729</b>	2916	3808

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>8</b>	19	22
Sodium	ppm	ASTM D5185m	<b>12</b>	38	15
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	9.7	6.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	21.2	23.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.0</b>	17.3	20.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.4</b>	8.3	11.5







# OIL ANALYSIS REPORT

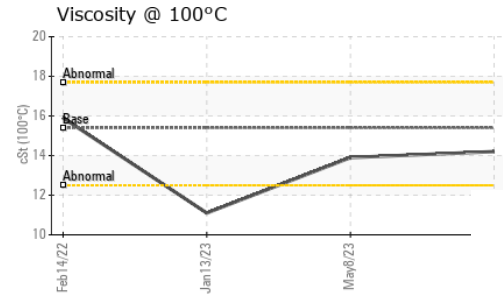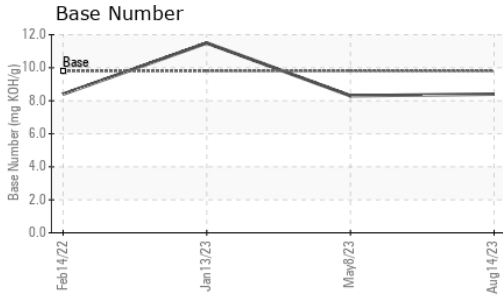

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.9	▲ 11.1

## GRAPHS

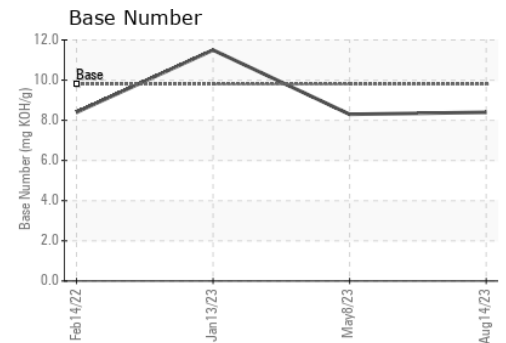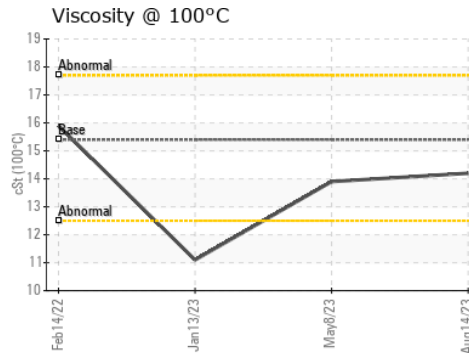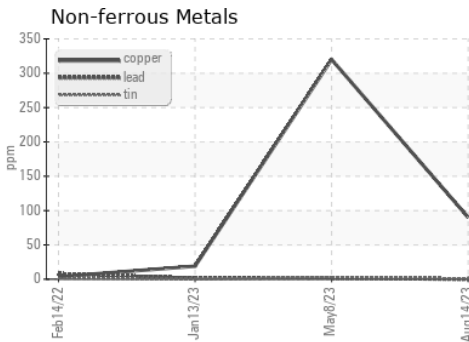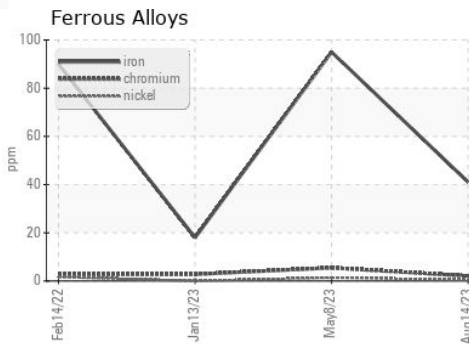

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083453 **Received** : 25 Aug 2023  
**Lab Number** : 05934754 **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10620025 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: