




# OIL ANALYSIS REPORT

Sample Rating Trend

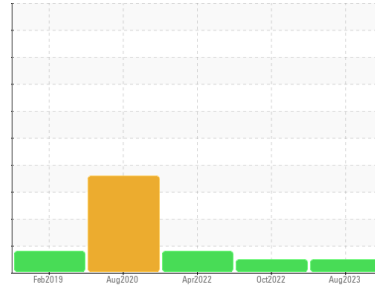

**NORMAL**



Machine Id  
**424049-402437**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0083440</b>	GFL0054371	GFL0045056
Sample Date	Client Info	<b>18 Aug 2023</b>	17 Oct 2022	29 Apr 2022
Machine Age	mls Client Info	<b>0</b>	452857	440995
Oil Age	mls Client Info	<b>0</b>	11862	0
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	2.9	▲ 3.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>6</b>	12	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>5</b>	3	5
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	1	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	1
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	<1	3
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	59	55
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1008</b>	924	974
Calcium	ppm ASTM D5185m 1070	<b>1101</b>	1048	1097
Phosphorus	ppm ASTM D5185m 1150	<b>1095</b>	1005	1017
Zinc	ppm ASTM D5185m 1270	<b>1315</b>	1169	1201
Sulfur	ppm ASTM D5185m 2060	<b>3872</b>	3459	2684
Lithium	ppm ASTM D5185m	<b>---</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	10	6
Sodium	ppm ASTM D5185m	<b>2</b>	2	5
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.2</b>	9.0	9.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.1</b>	20.7	21.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.0</b>	16.7	19.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.0</b>	8.2	7.8







# OIL ANALYSIS REPORT

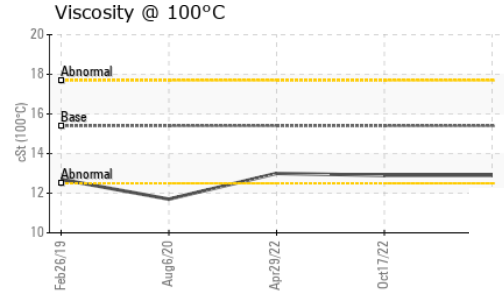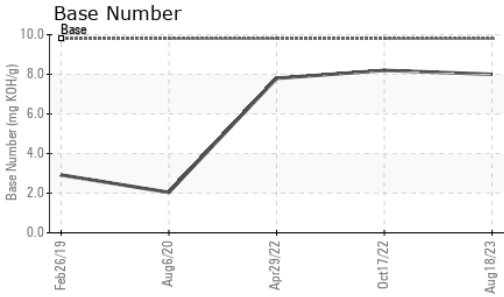

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.9</b>	12.9	13.0

## GRAPHS

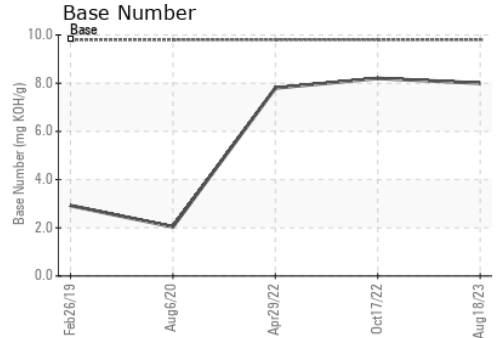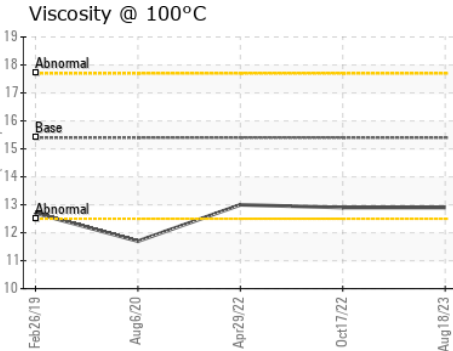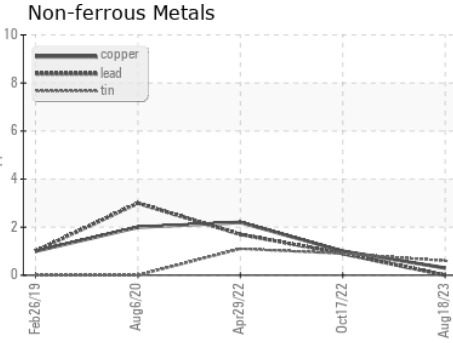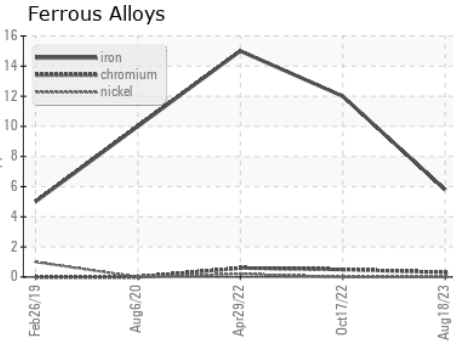

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083440 **Received** : 25 Aug 2023  
**Lab Number** : **05934760** **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10620031 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Jose Gonzalez  
 jgonzalez2@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)