




# OIL ANALYSIS REPORT

Sample Rating Trend

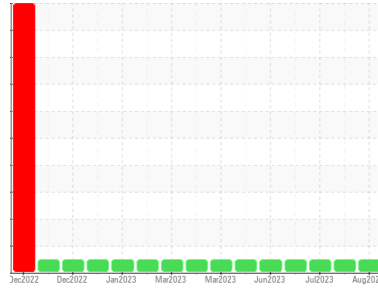

**NORMAL**



Machine Id  
**810039**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090438</b>	GFL0090429	GFL0086304
Sample Date	Client Info		<b>18 Aug 2023</b>	04 Aug 2023	12 Jul 2023
Machine Age	hrs	Client Info	<b>5085</b>	4993	4807
Oil Age	hrs	Client Info	<b>570</b>	478	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>26</b>	21	10
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>15</b>	9	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	10
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>67</b>	60	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1056</b>	1005	951
Calcium	ppm	ASTM D5185m 1070	<b>1158</b>	1090	1151
Phosphorus	ppm	ASTM D5185m 1150	<b>1122</b>	992	1028
Zinc	ppm	ASTM D5185m 1270	<b>1386</b>	1298	1295
Sulfur	ppm	ASTM D5185m 2060	<b>3847</b>	3520	3441

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	3	3
Sodium	ppm	ASTM D5185m	<b>5</b>	4	1
Potassium	ppm	ASTM D5185m >20	<b>27</b>	21	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.4</b>	1.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	9.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.6</b>	20.4	19.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.0</b>	15.1	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	7.4	7.8







# OIL ANALYSIS REPORT

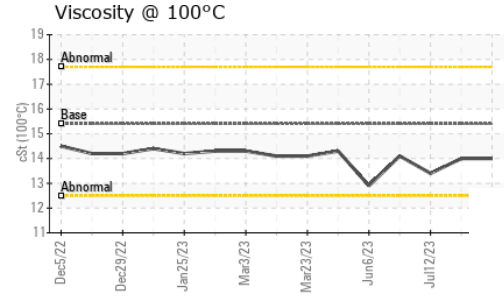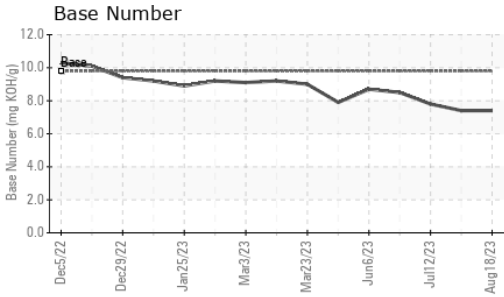

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.0	13.4

## GRAPHS

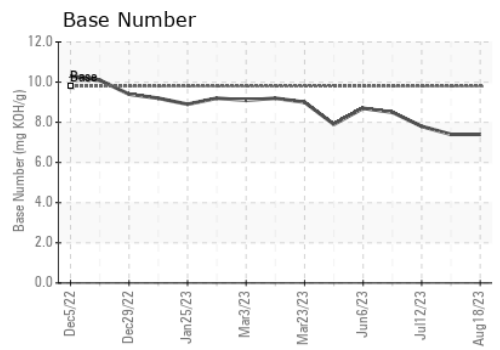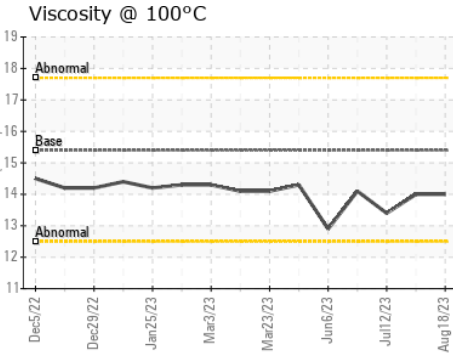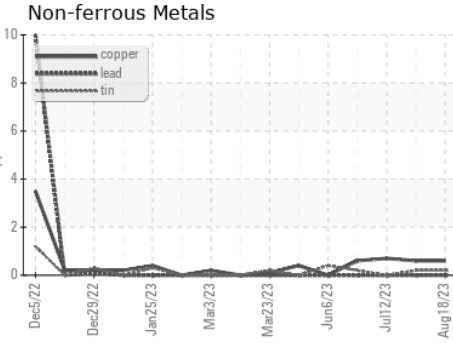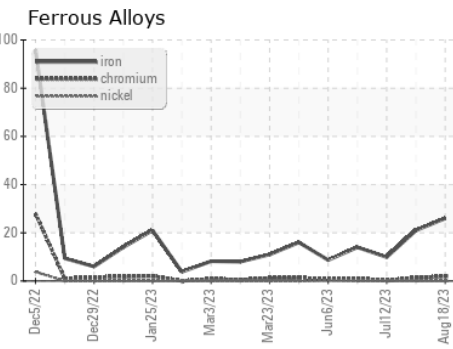

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090438 **Received** : 25 Aug 2023  
**Lab Number** : **05934782** **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10620053 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: