




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**180**  
Machine Id  
**2659**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

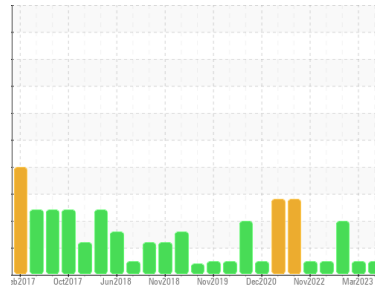

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090437</b>	GFL0073539	GFL0066341
Sample Date	Client Info		<b>22 Aug 2023</b>	30 Mar 2023	24 Feb 2023
Machine Age	hrs	Client Info	<b>30736</b>	30457	30250
Oil Age	hrs	Client Info	<b>620</b>	341	0
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	▲ 3.7

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	26	23
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	1
Copper	ppm	ASTM D5185m >330	<b>2</b>	5	4
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>18</b>	165	▲ 160
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>79</b>	61	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>943</b>	288	▲ 313
Calcium	ppm	ASTM D5185m 1070	<b>1132</b>	1568	▲ 1627
Phosphorus	ppm	ASTM D5185m 1150	<b>1078</b>	902	938
Zinc	ppm	ASTM D5185m 1270	<b>1333</b>	1104	1136
Sulfur	ppm	ASTM D5185m 2060	<b>3887</b>	3312	3019

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	5	5
Sodium	ppm	ASTM D5185m	<b>25</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>42</b>	1	1
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	1.4	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.7</b>	7.6	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.0</b>	20.6	20.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.0</b>	13.1	13.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>10.0</b>	7.8	7.7







# OIL ANALYSIS REPORT

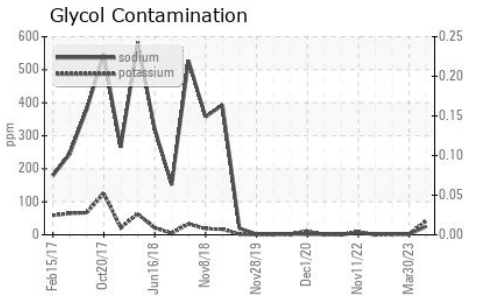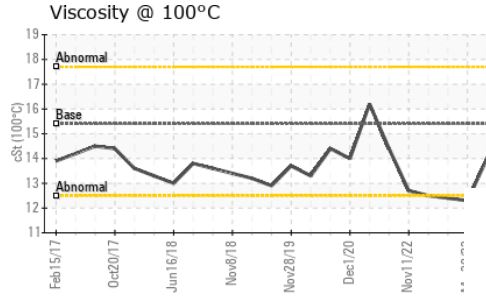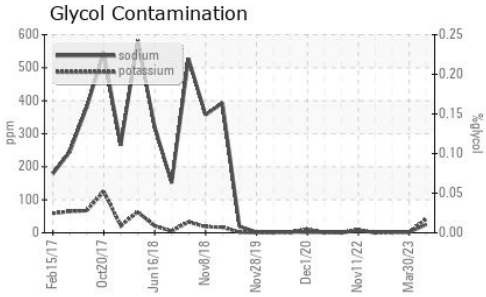

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	12.3

## GRAPHS

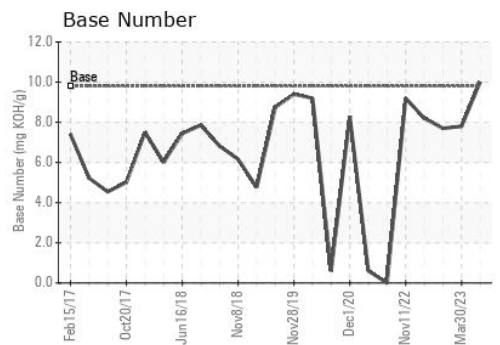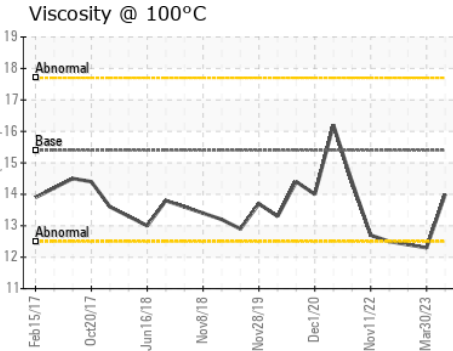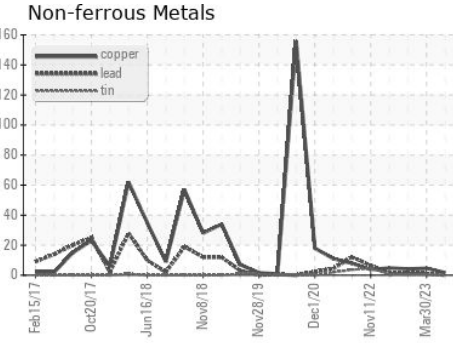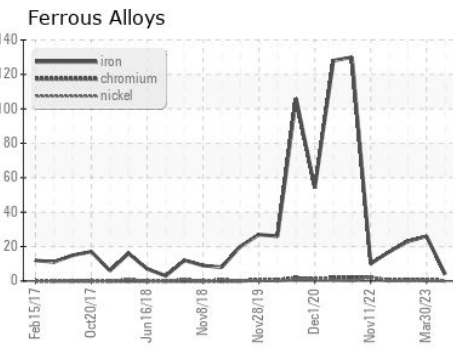

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090437  
**Lab Number** : 05934788  
**Unique Number** : 10620059  
**Test Package** : FLEET ( Additional Tests: Glycol )

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: