




# OIL ANALYSIS REPORT

Sample Rating Trend

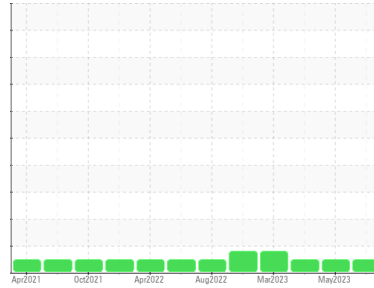

**NORMAL**



Machine Id  
**429063-402427**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0071724</b>	GFL0071759	GFL0058477	
Sample Date	Client Info	<b>24 Aug 2023</b>	31 May 2023	16 May 2023	
Machine Age	hrs	Client Info	<b>17177</b>	12463	12403
Oil Age	hrs	Client Info	<b>600</b>	600	1200
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	<b>13</b>	3	9
Chromium	ppm	ASTM D5185m >4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	<1	0
Lead	ppm	ASTM D5185m >45	<b>0</b>	1	6
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	15	43
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>9</b>	39	16
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	49	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>604</b>	557	538
Calcium	ppm	ASTM D5185m 1510	<b>1838</b>	1585	1595
Phosphorus	ppm	ASTM D5185m 780	<b>826</b>	797	769
Zinc	ppm	ASTM D5185m 870	<b>1129</b>	972	987
Sulfur	ppm	ASTM D5185m 2040	<b>3231</b>	3060	2233

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	<b>4</b>	4	6
Sodium	ppm	ASTM D5185m	<b>27</b>	4	9
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.6</b>	7.3	11.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.7</b>	20.1	23.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	16.9	22.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.9</b>	8.4	6.2







# OIL ANALYSIS REPORT

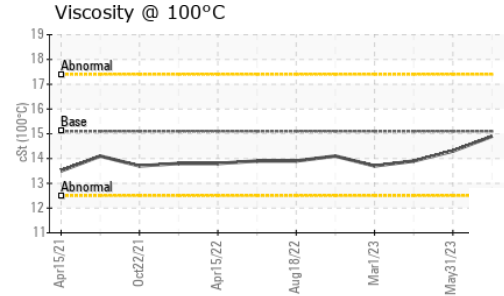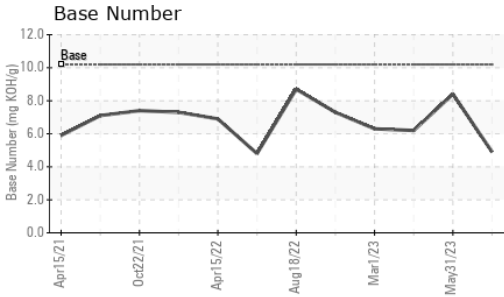

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.9</b>	14.3	13.9

## GRAPHS

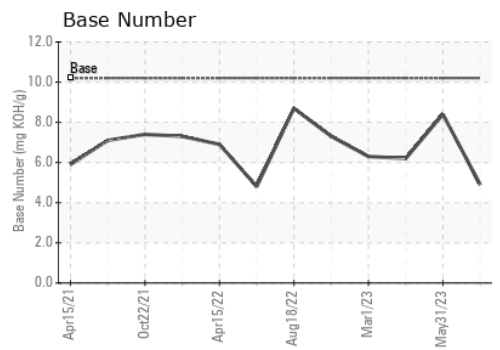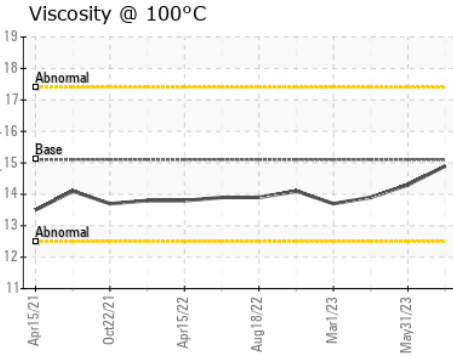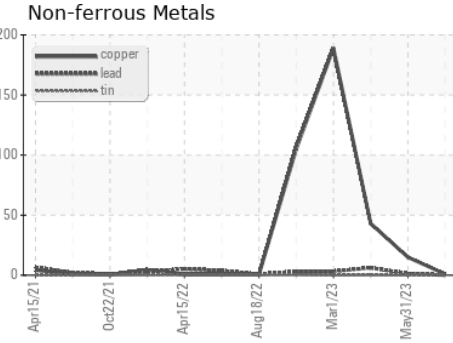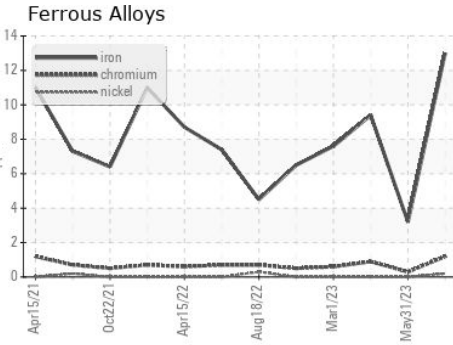

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071724 **Received** : 25 Aug 2023  
**Lab Number** : **05935157** **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10620428 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 883 - Orange City**  
 1378 South Volusia Ave  
 Orange City, FL  
 US 32763  
 Contact: JEFF COOPERSMITH  
 JCOOPERSMITH@GFLENV.COM  
 T: (386)503-8468  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)