

# PROBLEM SUMMARY


Area  
**(50935Z) Walgreens**  
 Machine Id  
**[Walgreens] 136A63254**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

Sample Rating Trend




## COMPONENT CONDITION SUMMARY


▲ Ferrous Alloys

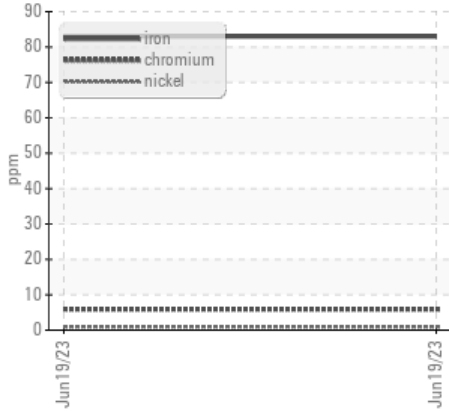

Glycol Contamination

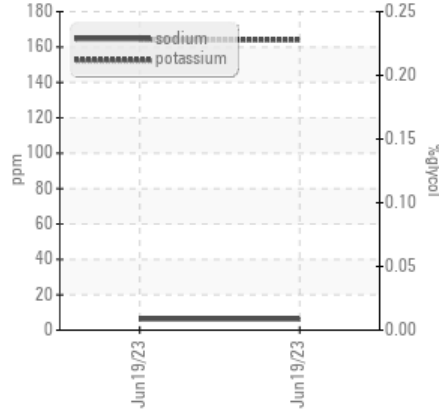

Aluminum (ppm)

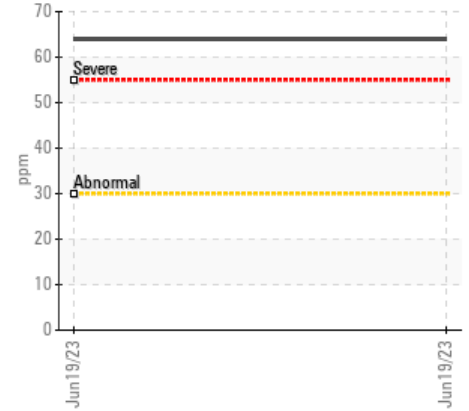

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Iron	ppm	ASTM D5185m	>80	▲ 83	---	---
Chromium	ppm	ASTM D5185m	>5	▲ 6	---	---

Customer Id: TSV1374  
 Sample No.: PCA0099949  
 Lab Number: 05935267  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Area  
**(50935Z) Walgreens**  
 Machine Id  
**[Walgreens] 136A63254**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Cylinder, crank, or cam shaft wear is indicated.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0099949</b>	---	---
Sample Date	Client Info	<b>19 Jun 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>50000</b>	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>▲ 83</b>	---	---
Chromium	ppm ASTM D5185m >5	<b>▲ 6</b>	---	---
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >30	<b>64</b>	---	---
Lead	ppm ASTM D5185m >30	<b>0</b>	---	---
Copper	ppm ASTM D5185m >150	<b>107</b>	---	---
Tin	ppm ASTM D5185m >5	<b>4</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>25</b>	---	---
Barium	ppm ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 50	<b>50</b>	---	---
Manganese	ppm ASTM D5185m 0	<b>5</b>	---	---
Magnesium	ppm ASTM D5185m 950	<b>647</b>	---	---
Calcium	ppm ASTM D5185m 1050	<b>1880</b>	---	---
Phosphorus	ppm ASTM D5185m 995	<b>801</b>	---	---
Zinc	ppm ASTM D5185m 1180	<b>1004</b>	---	---
Sulfur	ppm ASTM D5185m 2600	<b>2387</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>10</b>	---	---
Sodium	ppm ASTM D5185m	<b>6</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>164</b>	---	---


## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>12.7</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.8</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>26.6</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.1</b>	---	---

# OIL ANALYSIS REPORT







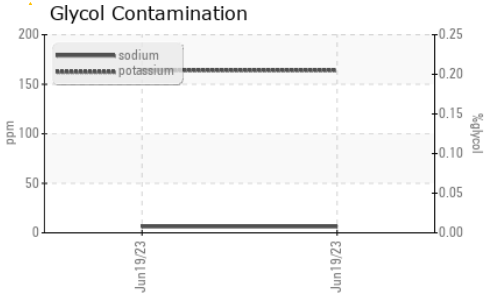


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

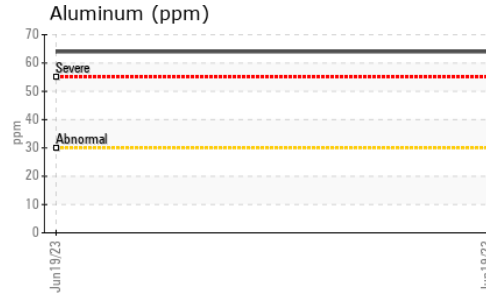

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.7	---

## GRAPHS

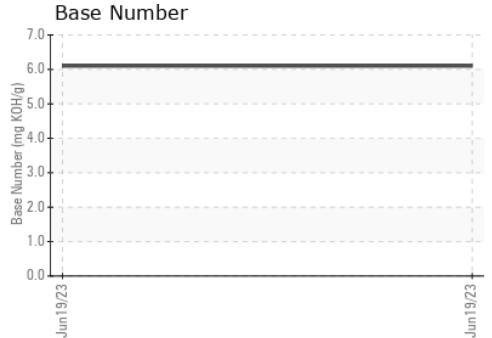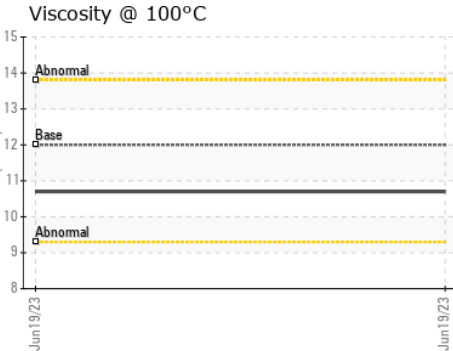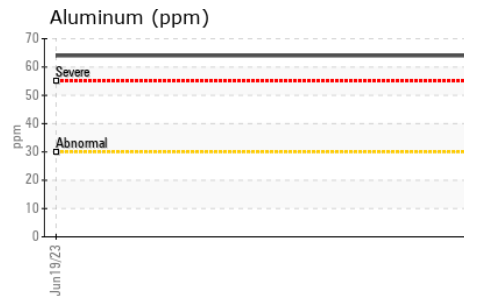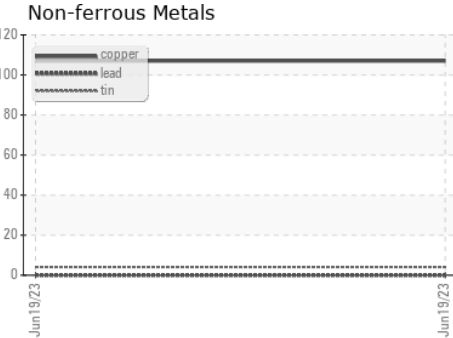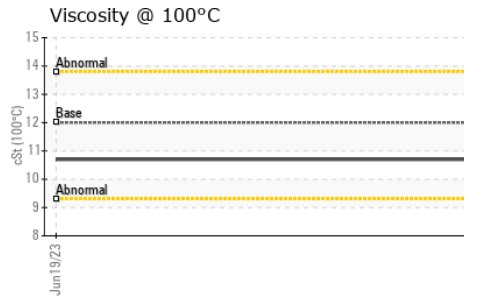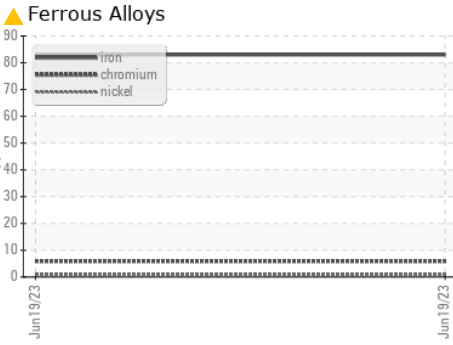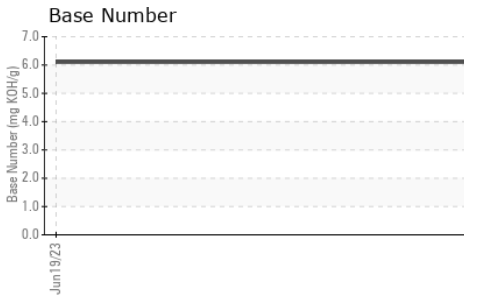

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099949 **Received** : 25 Aug 2023  
**Lab Number** : 05935267 **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10620538 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Transervice - Shop 1374 - Berkeley-Hartford**  
 80 International Drive  
 Windsor, CT  
 US 06095  
 Contact: Paul Santanella  
 psantanella@transervice.com  
 T: (860)687-1037  
 F: (860)687-1476

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)