



# OIL ANALYSIS REPORT

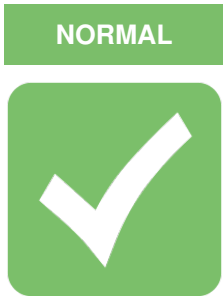

Area  
**KEMP QUARRIES / PRYOR STONE [65064]**  
Machine Id  
**OHT058**  
Component  
**Rear Left Final Drive**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

Sample Rating Trend

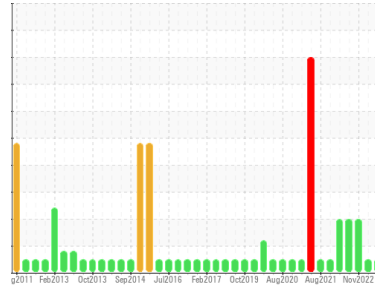

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor. ( Customer Sample Comment: Pm3 performed. All oil samples taken. Engine oil, and all filters changed. )

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084056</b>	PCA0083985	PCA0049011
Sample Date	Client Info		<b>09 Aug 2023</b>	05 May 2023	07 Nov 2022
Machine Age	hrs	Client Info	<b>51041</b>	50583	50124
Oil Age	hrs	Client Info	<b>1540</b>	49501	623
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Oil Added
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>113</b>	39	377
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	<1	0
Titanium	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>9</b>	4	11
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	1
Copper	ppm	ASTM D5185m >75	<b>9</b>	2	18
Tin	ppm	ASTM D5185m >8	<b>1</b>	1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	2
Magnesium	ppm	ASTM D5185m 9	<b>16</b>	18	8
Calcium	ppm	ASTM D5185m 3114	<b>3731</b>	3638	▲ 1045
Phosphorus	ppm	ASTM D5185m 1099	<b>1089</b>	1055	▲ 512
Zinc	ppm	ASTM D5185m 1245	<b>1344</b>	1312	▲ 640
Sulfur	ppm	ASTM D5185m 7086	<b>5358</b>	4899	▲ 2093

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>68</b>	43	54
Sodium	ppm	ASTM D5185m	<b>3</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	5


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>LIGHT</b>	MODER	MODER
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 213.9	<b>183</b>	186	▲ 86.2

# OIL ANALYSIS REPORT

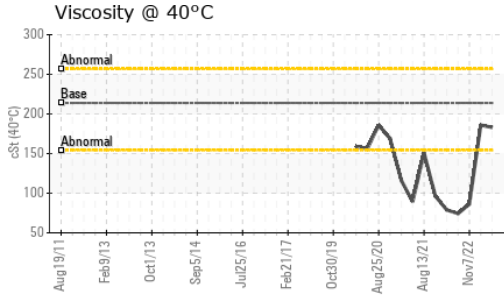

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

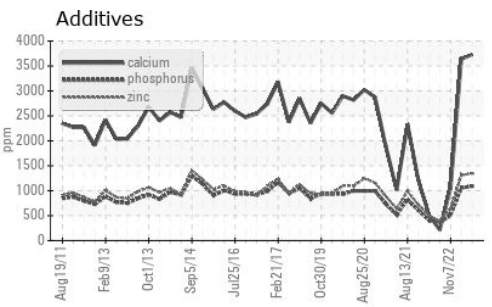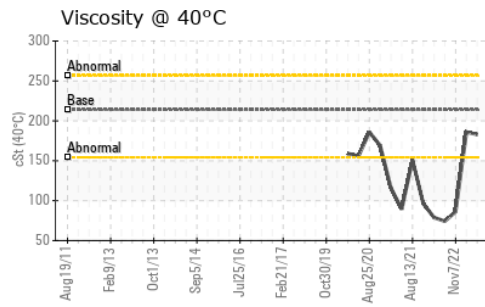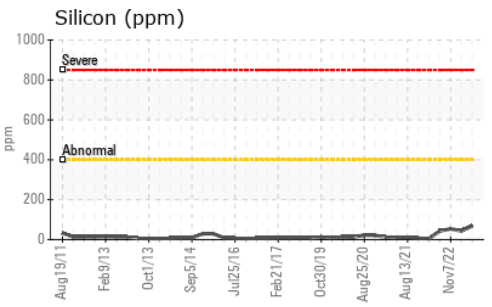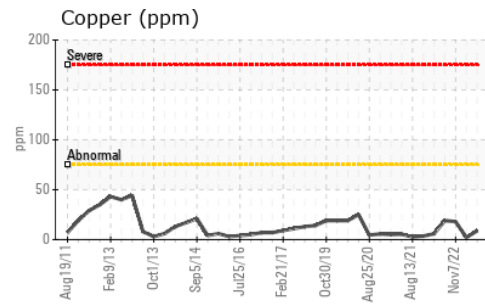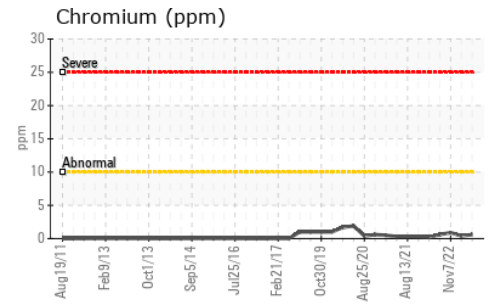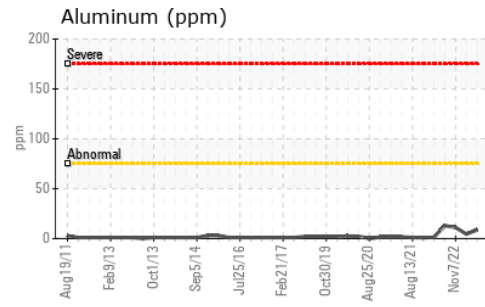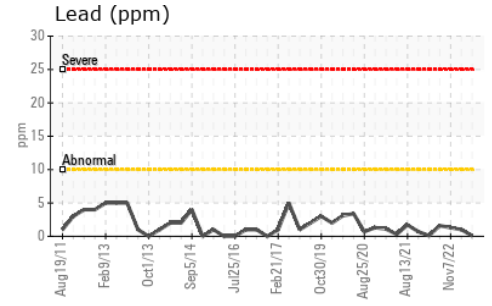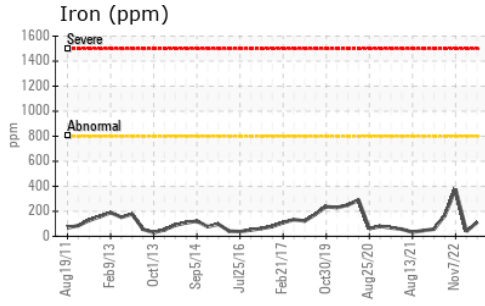

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084056  
**Lab Number** : 05935691  
**Unique Number** : 10620962  
**Test Package** : MOB 1

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact:  
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)