




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**428069**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

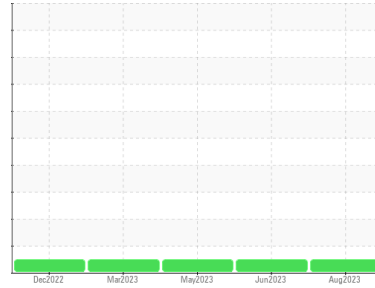

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0072539</b>	GFL0068293	GFL0068322
Sample Date	Client Info		<b>17 Aug 2023</b>	07 Jun 2023	04 May 2023
Machine Age	hrs	Client Info	<b>12381</b>	11090	11090
Oil Age	hrs	Client Info	<b>12381</b>	11090	11090
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>11</b>	8	12
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>21</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	6	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	61	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1008</b>	913	937
Calcium	ppm	ASTM D5185m 1070	<b>1228</b>	1091	1117
Phosphorus	ppm	ASTM D5185m 1150	<b>1107</b>	1015	1009
Zinc	ppm	ASTM D5185m 1270	<b>1385</b>	1218	1280
Sulfur	ppm	ASTM D5185m 2060	<b>3604</b>	3358	3386

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	6
Sodium	ppm	ASTM D5185m	<b>5</b>	1	8
Potassium	ppm	ASTM D5185m >20	<b>66</b>	8	20

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.4	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.2</b>	6.8	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	19.6	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.3</b>	14.6	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.5</b>	8.4	4.6







# OIL ANALYSIS REPORT

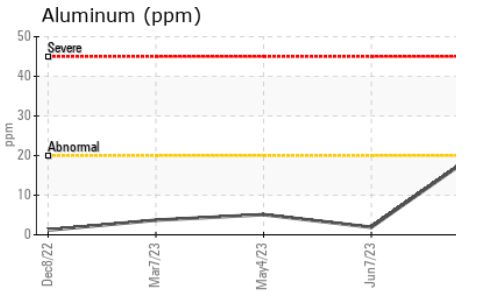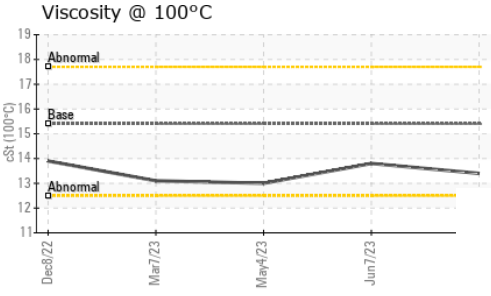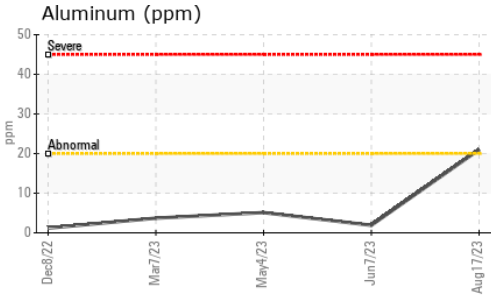

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.8	13.0

### GRAPHS

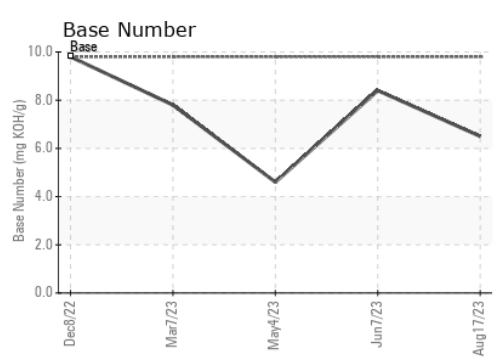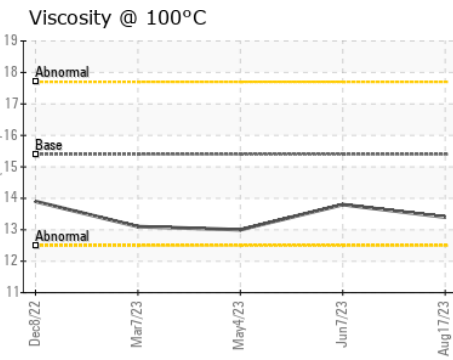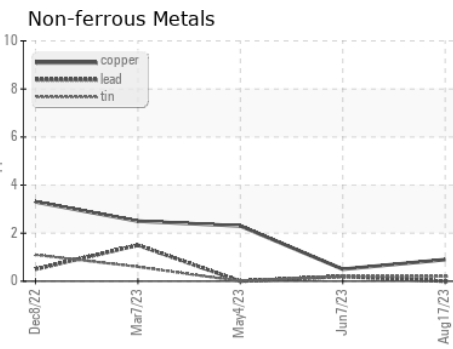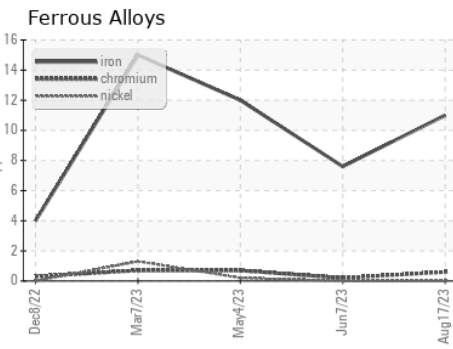

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0072539 **Received** : 28 Aug 2023  
**Lab Number** : **05936006** **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10621277 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 419 - Metro Saginaw**  
 6950 N Michigan  
 Saginaw, MI  
 US 48604  
 Contact: Jeremy Hines  
 jhines@gflenv.com  
 T: (800)684-1277  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)