


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / RIVER VALLEY ARKOMA**  
Machine Id  
**OHT102**  
Component  
**Rear Differential**  
Fluid  
**MOBIL MOBILUBE HD 80W90 (--- GAL)**

Sample Rating Trend

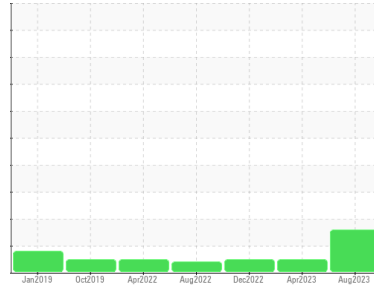

## ADDITIVES



## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0083938</b>	PCA0070333	PCA0070472
Sample Date	Client Info		<b>22 Aug 2023</b>	20 Apr 2023	09 Dec 2022
Machine Age	hrs	Client Info	<b>29115</b>	28531	27903
Oil Age	hrs	Client Info	<b>28531</b>	28531	27510
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>177</b>	152	88
Chromium	ppm	ASTM D5185m >3	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	0	1
Lead	ppm	ASTM D5185m >13	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >103	<b>84</b>	82	26
Tin	ppm	ASTM D5185m >5	<b>3</b>	3	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>▲ 35</b>	294	260
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	11	6
Manganese	ppm	ASTM D5185m	<b>2</b>	2	<1
Magnesium	ppm	ASTM D5185m	<b>5</b>	2	0
Calcium	ppm	ASTM D5185m	<b>▲ 3627</b>	27	26
Phosphorus	ppm	ASTM D5185m	<b>948</b>	999	977
Zinc	ppm	ASTM D5185m	<b>▲ 1118</b>	15	11
Sulfur	ppm	ASTM D5185m	<b>▲ 6237</b>	19973	23111

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>18</b>	8	5
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	MODER	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG


## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 136	<b>191</b>	137	138









# OIL ANALYSIS REPORT

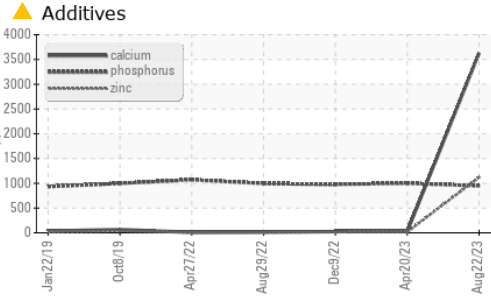

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

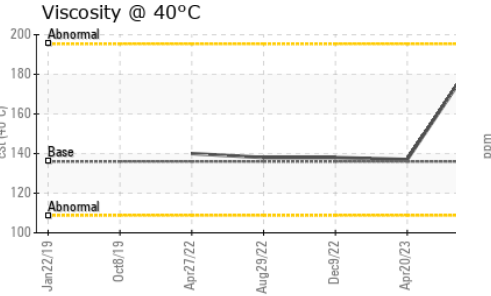

## GRAPHS

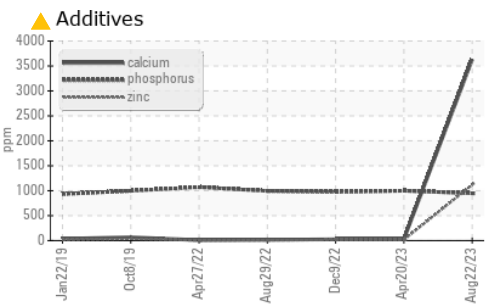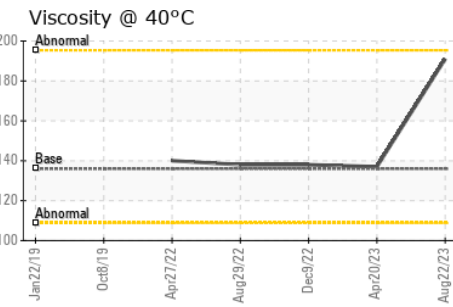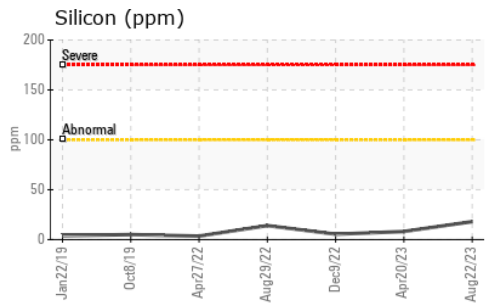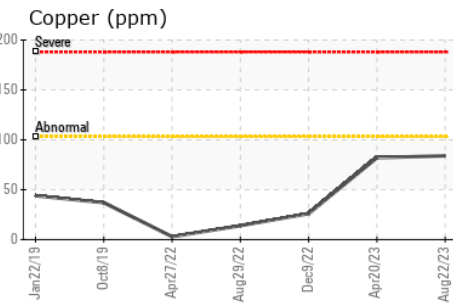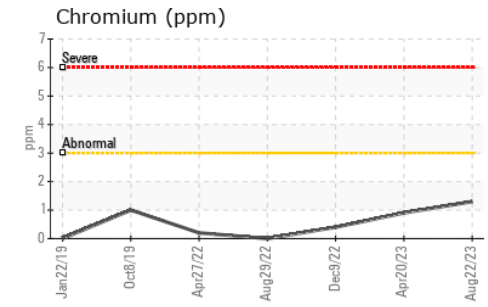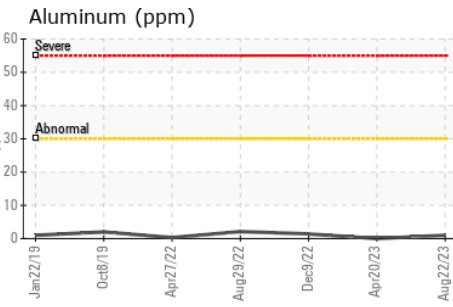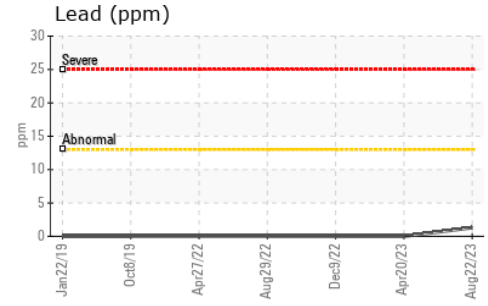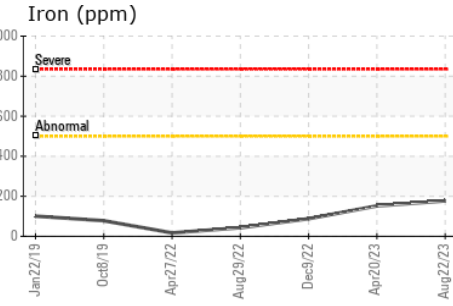

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0083938 **Received** : 28 Aug 2023  
**Lab Number** : 05936841 **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10622112 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - River Valley - Arkoma**  
 12971 HWY 9a  
 Shawnee, OK  
 US 74804

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: arkomashop@kempquarries.net

T:

F: