


# OIL ANALYSIS REPORT

Sample Rating Trend



**FUEL**

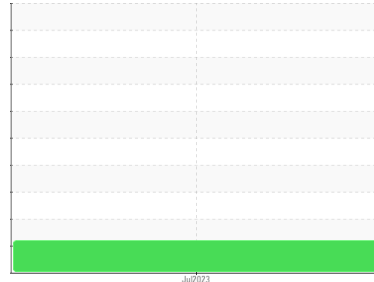

Machine Id  
**NOT GIVEN PCA0097293 (S/N NO INFO ON SIF/BOTTLE)**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of fuel present in the oil.

### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0097293</b>	---	---
Sample Date	Client Info	<b>10 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>4343</b>	---
Oil Age	hrs	Client Info	<b>250</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185m	<b>3</b>	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	---
Lead	ppm	ASTM D5185m >40	<b>1</b>	---
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>3</b>	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	---
Molybdenum	ppm	ASTM D5185m 100	<b>43</b>	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m 450	<b>726</b>	---
Calcium	ppm	ASTM D5185m 3000	<b>1282</b>	---
Phosphorus	ppm	ASTM D5185m 1150	<b>944</b>	---
Zinc	ppm	ASTM D5185m 1350	<b>1180</b>	---
Sulfur	ppm	ASTM D5185m 4250	<b>3409</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	---
Sodium	ppm	ASTM D5185m >158	<b>3</b>	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---
Fuel	%	ASTM D3524 >5	<b>▲ 7.3</b>	---




## INFRA-RED

method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.6</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>7.7</b>	---









# OIL ANALYSIS REPORT

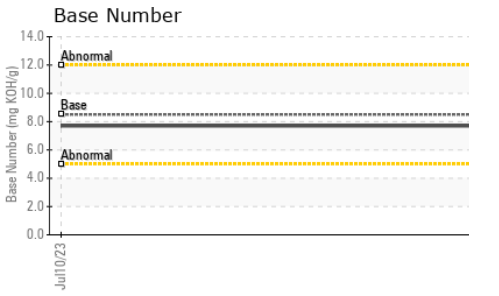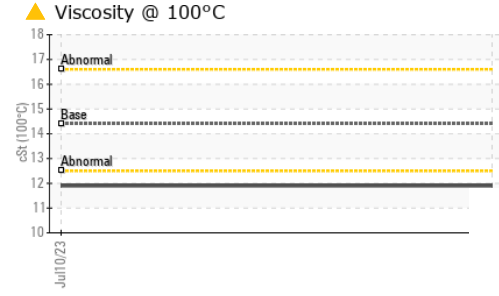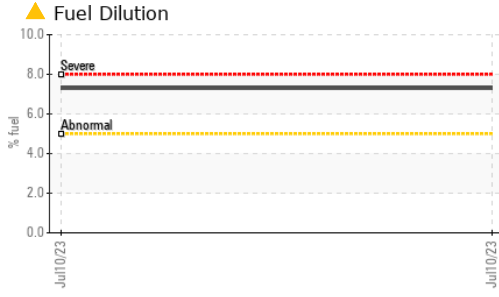

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4 ▲ 11.9	---	---

## GRAPHS

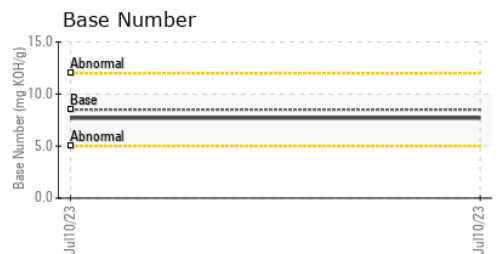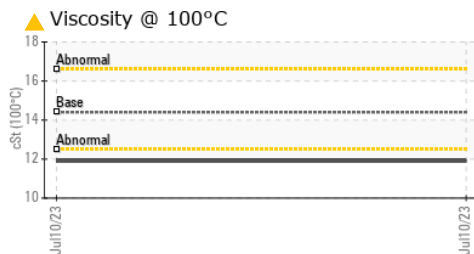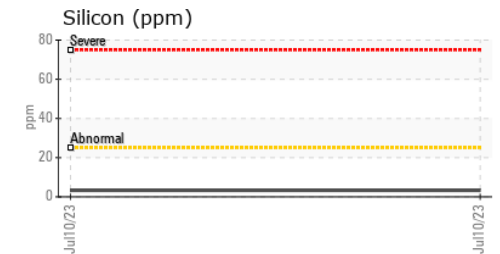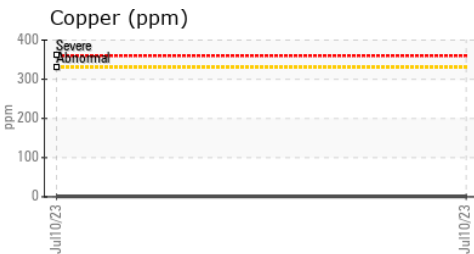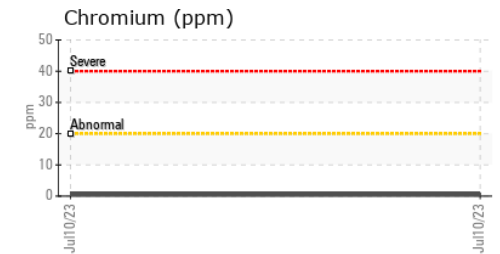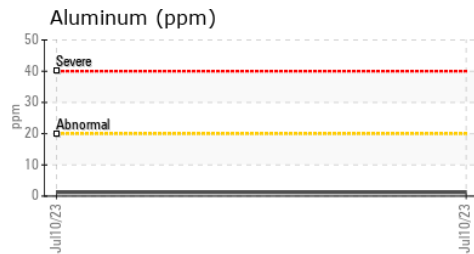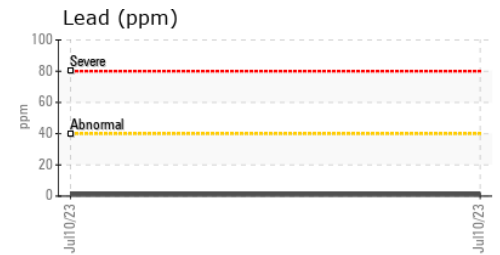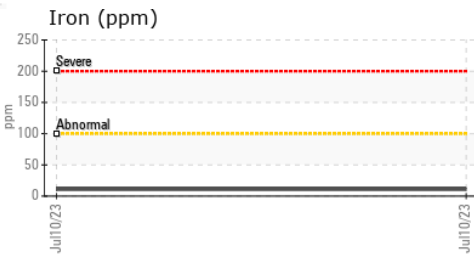

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097293 **Received** : 29 Aug 2023  
**Lab Number** : 05936957 **Diagnosed** : 30 Aug 2023  
**Unique Number** : 10622228 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, TBN )

**NORTH AMERICAN STEVEDORING CO**  
 9301 S KREITER AVE  
 CHICAGO, IL  
 US 60617  
 Contact: PACO MARTINEZ  
 paco.martinez@qsl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)