





PROBLEM SUMMARY

Area
(GD84581) S0916A-Suamico
 Machine Id
FORD 224061
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (37 QTS)

Sample Rating Trend



COMPONENT CONDITION SUMMARY

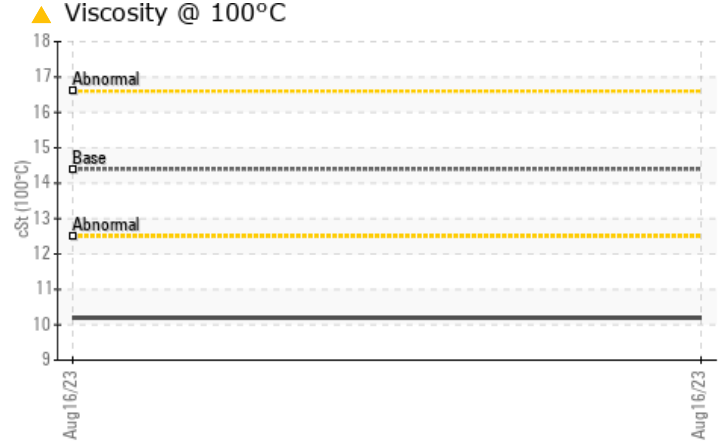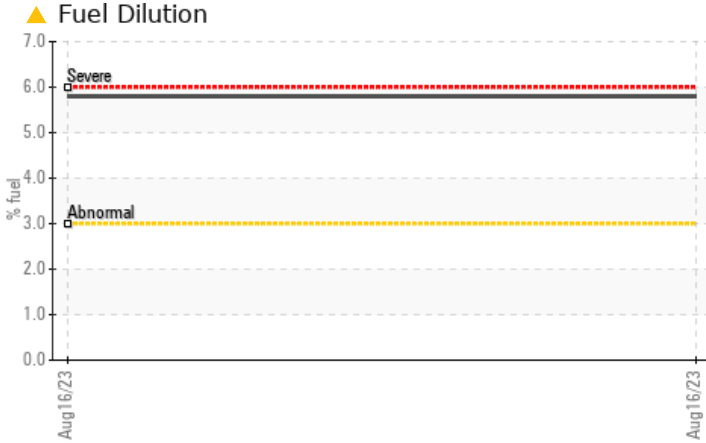

RECOMMENDATION

We advise that you check the fuel injection system.
 We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Fuel	%	ASTM D3524	>3.0	▲ 5.8	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.2	---	---

Customer Id: GFL916A
 Sample No.: GFL0074834
 Lab Number: 05937030
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

FUEL

Area
(GD84581) S0916A-Suamico
 Machine Id
FORD 224061
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (37 QTS)



DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0074834	---	---
Sample Date	Client Info			16 Aug 2023	---	---
Machine Age	hrs	Client Info		8600	---	---
Oil Age	hrs	Client Info		100	---	---
Oil Changed	Client Info			Not Changed	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	9	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		298	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		84	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		484	---	---
Calcium	ppm	ASTM D5185m		1186	---	---
Phosphorus	ppm	ASTM D5185m		625	---	---
Zinc	ppm	ASTM D5185m		685	---	---
Sulfur	ppm	ASTM D5185m		2515	---	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	---	---
Sodium	ppm	ASTM D5185m	>50	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel	%	ASTM D3524	>3.0	▲ 5.8	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	---	---







OIL ANALYSIS REPORT

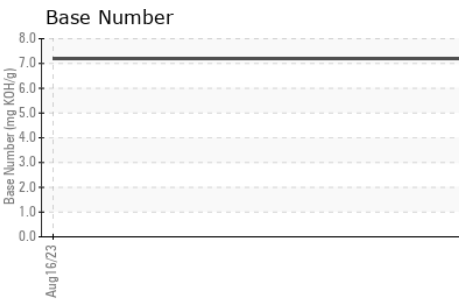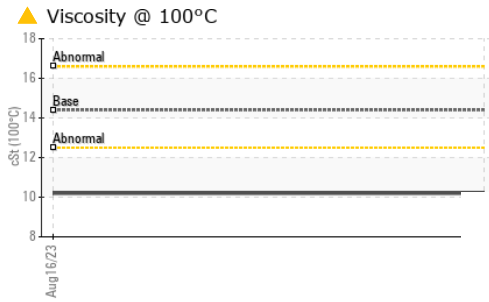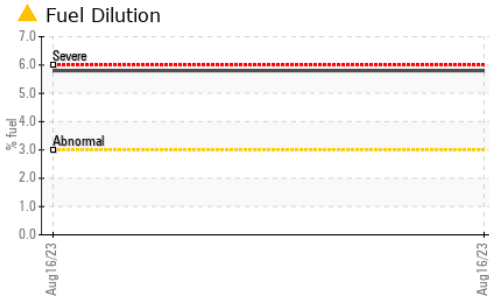

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.2	---

GRAPHS

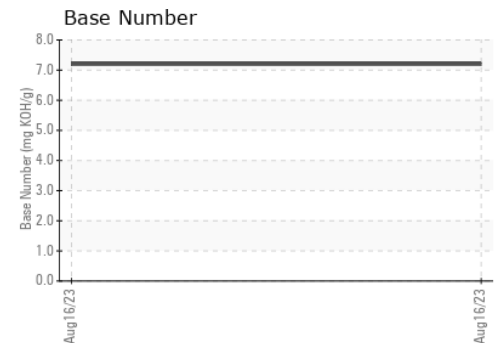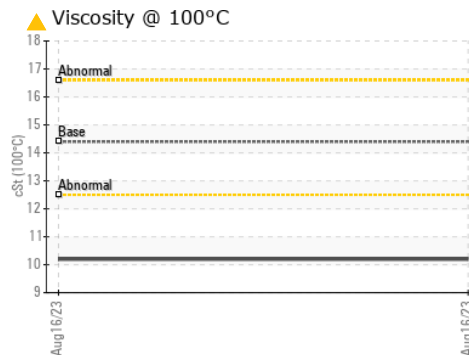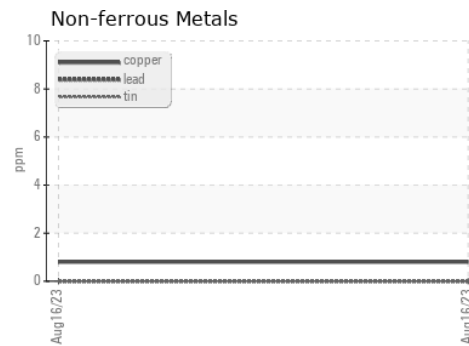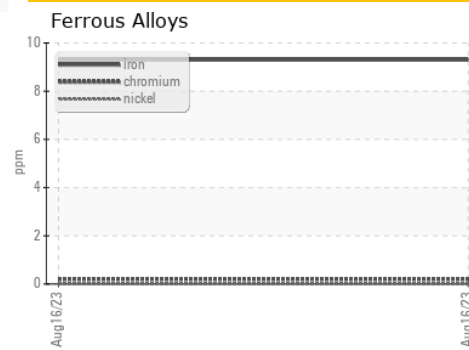

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0074834 **Received** : 29 Aug 2023
Lab Number : 05937030 **Diagnosed** : 30 Aug 2023
Unique Number : 10622301 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 916A - Suamico
 2300 Deerfield Ave E
 Suamico, WI
 US 54313
 Contact: NICHOLAS WEIDNER
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: