

# RECOMMENDATION

No corrective action is recommended at this time. The oil filtered at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |                        |              |         |          |  |  |  |  |
|--------------------------|------------------------|--------------|---------|----------|--|--|--|--|
| Sample Status            |                        | ATTENTION    | NORMAL  | NORMAL   |  |  |  |  |
| Particles >6µm           | ASTM D7647 >320        | <b>A</b> 387 | 30      | 83       |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) >17/15/13 | 3 🔺 17/16/13 | 15/12/9 | 15/14/11 |  |  |  |  |

Customer Id: KRASPRMO Sample No.: PCA0100111 Lab Number: 05937189 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

# **HISTORICAL DIAGNOSIS**

#### 11 Sep 2022 Diag: Aaron Black

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### 03 Nov 2021 Diag: Don Baldridge



Resal

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

29 Apr 2021 Diag: Angela Borella

#### NORMAL




Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report







# **OIL ANALYSIS REPORT**

#### Area SCOF [98406069] Machine Id 6320 EAST Component

Gearbox Fluid GEAR OIL ISO 460 (--- GAL)

# DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The oil filtered at the time of sampling has been noted. Resample at the next service interval to monitor.

# Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

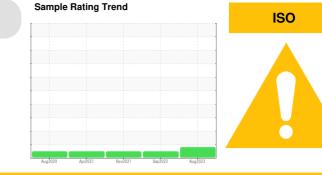

| SAMPLE INFOR    | MATION        | method       | limit/base | current         | history1    | history2    |
|-----------------|---------------|--------------|------------|-----------------|-------------|-------------|
| Sample Number   |               | Client Info  |            | PCA0100111      | PCA0076122  | PCA0056527  |
| Sample Date     |               | Client Info  |            | 15 Aug 2023     | 11 Sep 2022 | 03 Nov 2021 |
| Machine Age     | hrs           | Client Info  |            | 0               | 0           | 0           |
| Oil Age         | hrs           | Client Info  |            | 0               | 0           | 0           |
| Oil Changed     |               | Client Info  |            | Filtered        | Filtered    | Filtered    |
| Sample Status   |               |              |            | ATTENTION       | NORMAL      | NORMAL      |
| WEAR METAL      | S             | method       | limit/base | current         | history1    | history2    |
| Iron            | ppm           | ASTM D5185m  | >200       | 2               | 4           | 4           |
| Chromium        | ppm           | ASTM D5185m  | >15        | <1              | 0           | 0           |
| Nickel          | ppm           | ASTM D5185m  | >15        | 0               | 0           | 0           |
| Titanium        | ppm           | ASTM D5185m  |            | <1              | 0           | 0           |
| Silver          | ppm           | ASTM D5185m  |            | 0               | <1          | 0           |
| Aluminum        | ppm           | ASTM D5185m  | >25        | 2               | 4           | 3           |
| Lead            | ppm           | ASTM D5185m  | >100       | <1              | 0           | 0           |
| Copper          | ppm           | ASTM D5185m  | >200       | <1              | 0           | 0           |
| Tin             | ppm           |              | >25        | <1              | <1          | 0           |
| Antimony        | ppm           | ASTM D5185m  | >5         |                 |             | 0           |
| Vanadium        | ppm           | ASTM D5185m  |            | <1              | 0           | 0           |
| Cadmium         | ppm           | ASTM D5185m  |            | <1              | 0           | 0           |
| ADDITIVES       |               | method       | limit/base | current         | history1    | history2    |
| Boron           | ppm           | ASTM D5185m  | 50         | 0               | 0           | 2           |
| Barium          | ppm           | ASTM D5185m  | 15         | 0               | 0           | 0           |
| Molybdenum      | ppm           | ASTM D5185m  | 15         | 0               | 0           | 0           |
| Manganese       | ppm           | ASTM D5185m  |            | <1              | <1          | 0           |
| Magnesium       | ppm           | ASTM D5185m  | 50         | 6               | 0           | 0           |
| Calcium         | ppm           | ASTM D5185m  | 50         | 0               | <1          | 0           |
| Phosphorus      | ppm           | ASTM D5185m  | 350        | 265             | 315         | 346         |
| Zinc            | ppm           | ASTM D5185m  | 100        | 17              | 4           | 2           |
| Sulfur          | ppm           | ASTM D5185m  | 12500      | 355             | 396         | 364         |
| CONTAMINAN      | TS            | method       | limit/base | current         | history1    | history2    |
| Silicon         | ppm           | ASTM D5185m  | >50        | <1              | 8           | 1           |
| Sodium          | ppm           | ASTM D5185m  |            | 1               | 0           | <1          |
| Potassium       | ppm           | ASTM D5185m  | >20        | 3               | 1           | 0           |
| FLUID CLEANI    | <u>-INESS</u> | method       | limit/base | current         | history1    | history2    |
| Particles >4µm  |               | ASTM D7647   | >1300      | 1078            | 193         | 267         |
| Particles >6µm  |               | ASTM D7647   |            | <u> </u>        | 30          | 83          |
| Particles >14µm |               | ASTM D7647   | >80        | 49              | 4           | 11          |
| Particles >21µm |               | ASTM D7647   | >20        | 14              | 2           | 3           |
| Particles >38µm |               | ASTM D7647   | >4         | 2               | 0           | 0           |
| Particles >71µm |               | ASTM D7647   |            | 2               | 0           | 0           |
| Oil Cleanliness |               | ISO 4406 (c) | >17/15/13  | <b>17/16/13</b> | 15/12/9     | 15/14/11    |
|                 |               |              |            |                 |             |             |
| FLUID DEGRA     | DATION        | method       | limit/base | current         | history1    | history2    |



1.40 (B/H0X 1.20 1.00 1.00 0.80 0.60

- 명 0.40

0.20

0.00

520

500

480

40°C 460

25 440


420

400

380


Aug20/20

# **OIL ANALYSIS REPORT**

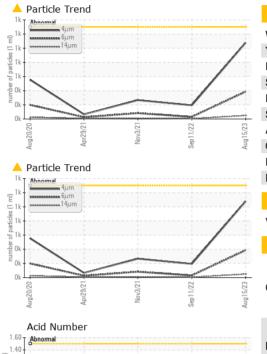

| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.2       | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPE      | RTIES  | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 460        | 428     | 433      | 437      |
| SAMPLE IMAG      | ES     | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            |         |          |          |
| Bottom           |        |           |            |         |          |          |

Bottom

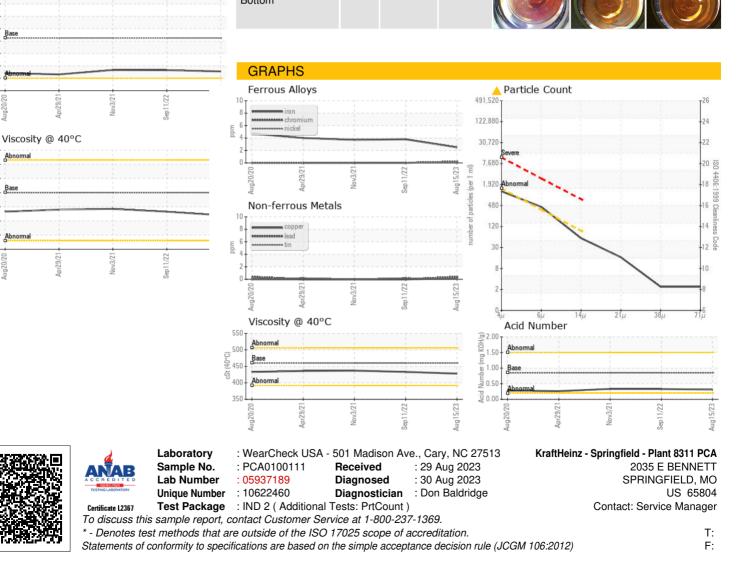

Contact/Location: Service Manager - KRASPRMO