


Area
Process Cheese [98421916]
 Machine Id
BLENDER 10
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

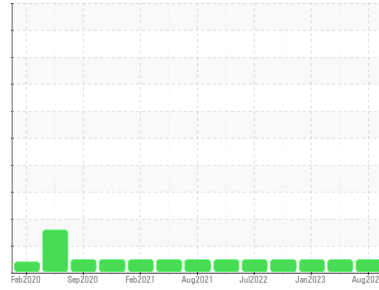

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PCA0094568	PCA0088304	PCA0081557
Sample Date	Client Info	28 Aug 2023	29 Mar 2023	16 Jan 2023
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	Filtered	Filtered	Filtered
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>200	0	<1	0
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>200	<1	0	0
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	50	0	0	0
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	50	6	<1	0
Calcium	ppm	ASTM D5185m	50	0	0	0
Phosphorus	ppm	ASTM D5185m	350	361	333	311
Zinc	ppm	ASTM D5185m	100	18	21	13
Sulfur	ppm	ASTM D5185m	12500	560	385	328

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>50	2	2	1
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	3	0	0

FLUID CLEANLINESS method limit/base current history1 history2


Particles >4µm	ASTM D7647	>1300	261	495	706
Particles >6µm	ASTM D7647	>320	54	86	90
Particles >14µm	ASTM D7647	>80	8	10	10
Particles >21µm	ASTM D7647	>20	3	3	3
Particles >38µm	ASTM D7647	>4	1	0	1
Particles >71µm	ASTM D7647	>3	0	0	1
Oil Cleanliness	ISO 4406 (c)	>17/15/13	15/13/10	16/14/10	17/14/10

FLUID DEGRADATION method limit/base current history1 history2


Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.40	0.40	0.37
------------------	----------	------------	------	-------------	------	------

OIL ANALYSIS REPORT


Particle Trend

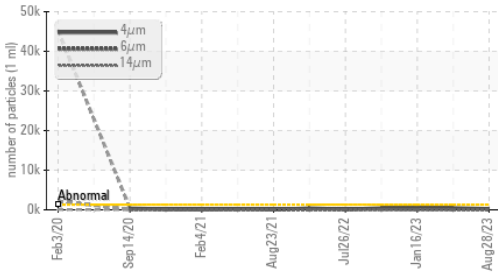


Acid Number

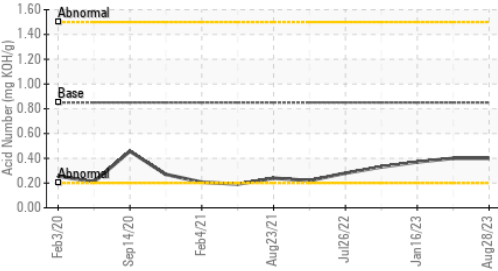

Viscosity @ 40°C

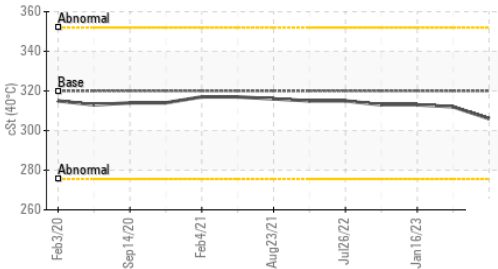


Particle Trend

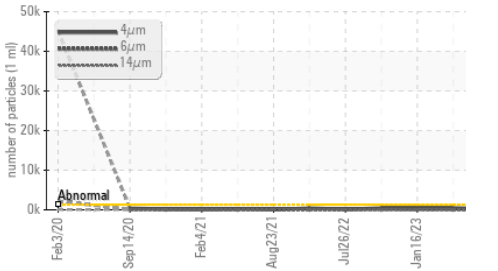





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	306.0	312

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

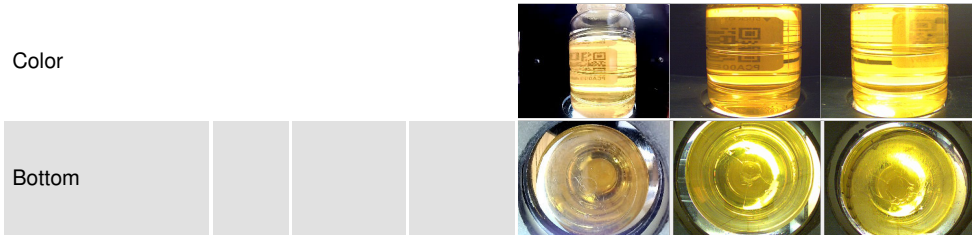

GRAPHS

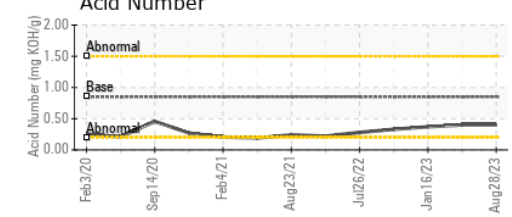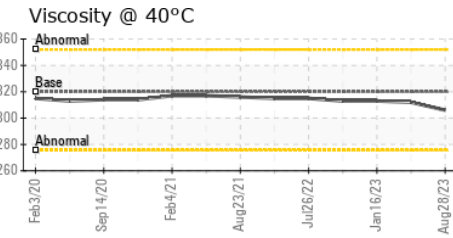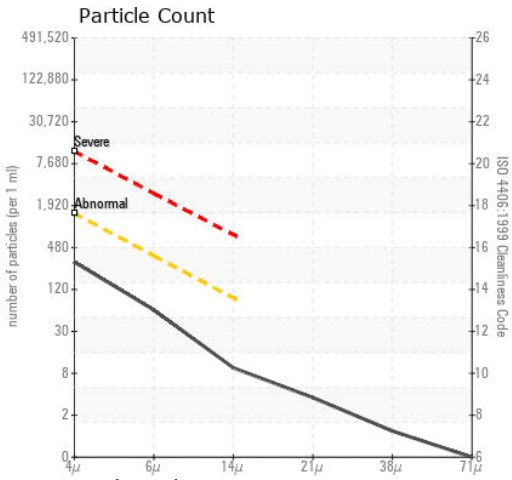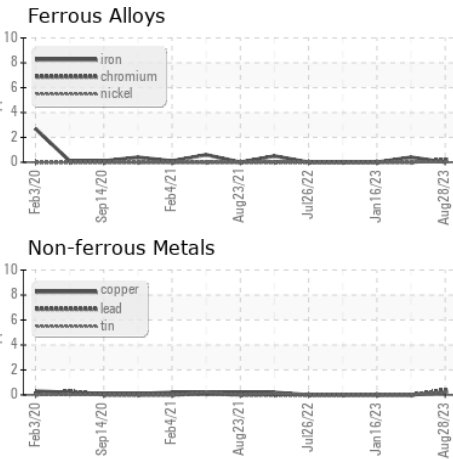

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0094568 **Received** : 29 Aug 2023
Lab Number : 05937192 **Diagnosed** : 14 Sep 2023
Unique Number : 10622463 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: PrtCount)

KraftHeinz - Springfield - Plant 8311 PCA
 2035 E BENNETT
 SPRINGFIELD, MO
 US 65804
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: