

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL	ABNORMAL					
Silicon	ppm	ASTM D5185m	>15	<u> </u>	1 21					

Customer Id: SDITER Sample No.: PCA0101514 Lab Number: 05937361 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

22 Sep 2022 Diag: Jonathan Hester

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Component Auxiliary Hoist

PETRO CANADA ENDURATEX EP 220 (--- GAL)

DIAGNOSIS

Machine Id

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0101514	PCA0079665	
Sample Date		Client Info		28 Aug 2023	22 Sep 2022	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS	6	method	limit/base	current	history1	history2
PQ		ASTM D8184		16	10	
Iron	ppm	ASTM D5185m	>20	2	1	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	<1	0	
Copper	ppm	ASTM D5185m	>20	<1	<1	
Tin	ppm	ASTM D5185m		0	0	
Vanadium	ppm	ASTM D5185m	20	0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	60	3	4	
Barium	ppm	ASTM D5185m		14	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	0	2	<1	
Calcium	ppm	ASTM D5185m		23	18	
Phosphorus	ppm	ASTM D5185m	270	220	204	
Zinc	ppm	ASTM D5185m		12	4	
Sulfur	ppm	ASTM D5185m	11200	13366	13572	
CONTAMINAN		method	limit/base	current	history1	history2
Silicon		ASTM D5185m		▲ 21	▲ 21	Thotory 2
	ppm		>10	0		
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	0 <1	0	
FLUID DEGRAD			limit/base			history2
		ASTM D8045			history1 0.42	nistory2
Acid Number (AN)	iliy Kon/y		0.40	0.42		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	ocationegBRAD E	LLIS- SDITE
						Page 3 of



OIL ANALYSIS REPORT

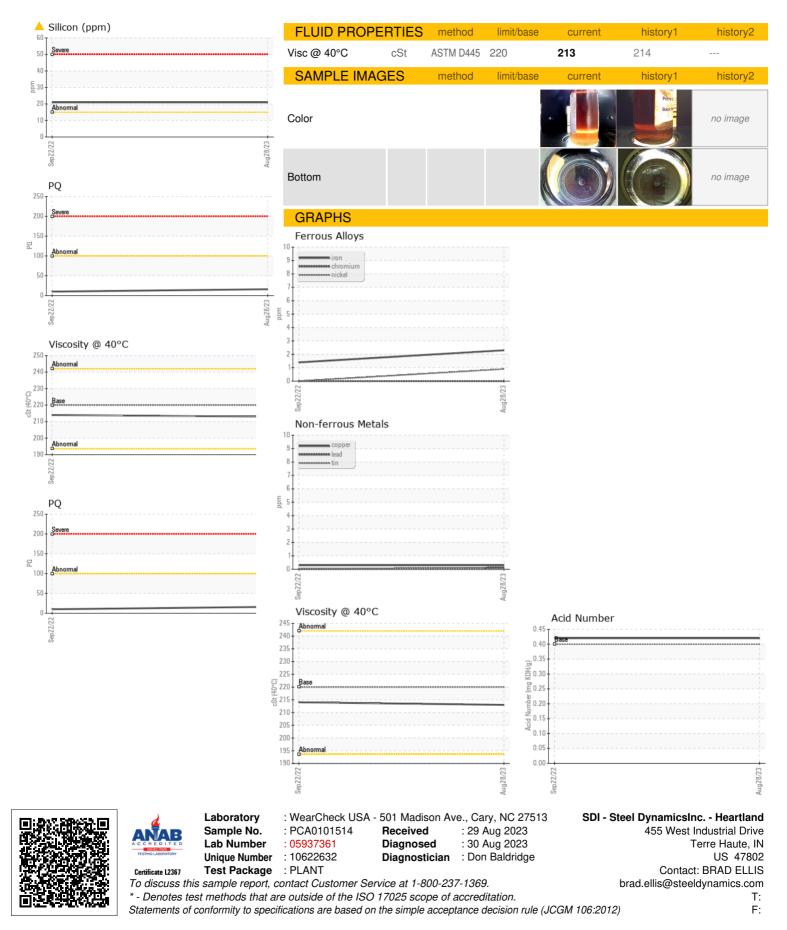

Contact/Location: BRAD ELLIS - SDITER