

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL	ABNORMAL					
Silicon	ppm	ASTM D5185m	>15	<u> </u>	<b>6</b> 3					

Customer Id: SDITER Sample No.: PCA0101518 Lab Number: 05937362 Test Package: PLANT



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

## **HISTORICAL DIAGNOSIS**

## 22 Sep 2022 Diag: Jonathan Hester



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





[] **CRANE** 3

# **OIL ANALYSIS REPORT**





PETRO CANADA ENDURATEX EP 220 (--- GAL)

# DIAGNOSIS

Machine Id

Component Main Hoist

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

# Contamination

Elemental level of silicon (Si) above normal.


### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0101518	PCA0079664	
Sample Date		Client Info		28 Aug 2023	22 Sep 2022	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS	S	method	limit/base	current	history1	history2
PQ		ASTM D8184		15	11	
Iron	ppm	ASTM D5185m	>20	20	17	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	<1	0	
Copper	ppm	ASTM D5185m	>20	<1	<1	
Tin	ppm	ASTM D5185m	>20	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	60	4	5	
Barium	ppm	ASTM D5185m	0	11	0	
Volybdenum	ppm	ASTM D5185m	0	0	<1	
Vanganese	ppm	ASTM D5185m	0	<1	<1	
Vagnesium	ppm	ASTM D5185m	0	1	<1	
Calcium	ppm	ASTM D5185m	0	26	25	
Phosphorus	ppm	ASTM D5185m	270	229	218	
Zinc	ppm	ASTM D5185m	0	17	10	
Sulfur	ppm	ASTM D5185m	11200	12459	13389	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>6</b> 9	<b>6</b> 3	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.40	0.54	0.52	
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	LIGHT	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	ocation BRAD E	LLIS - SDITEF
						Page 3 of 4



# **OIL ANALYSIS REPORT**

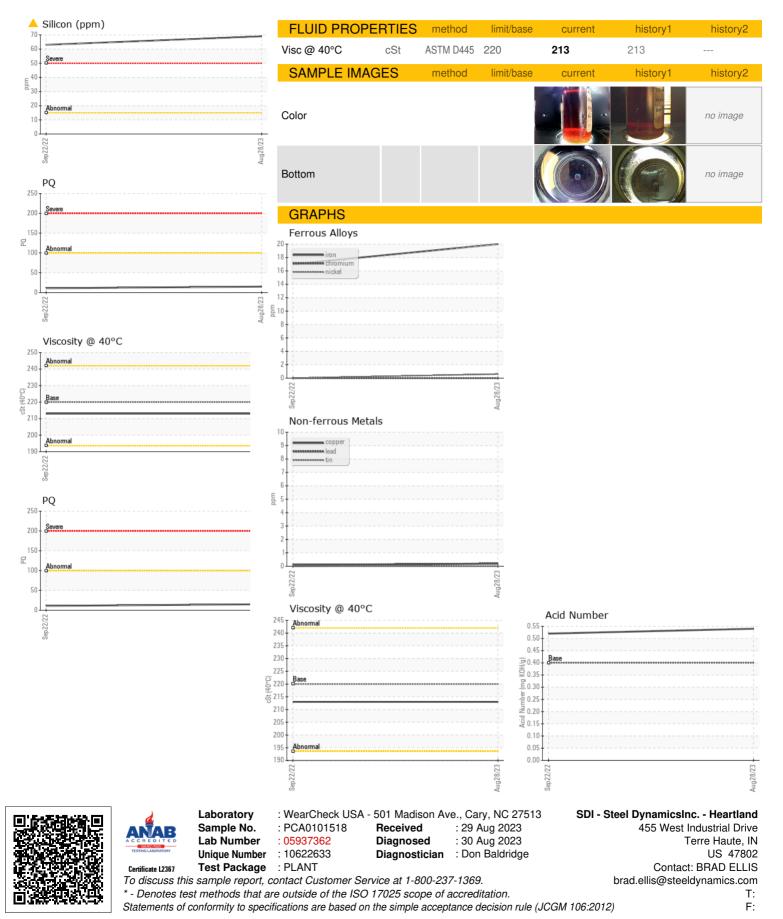

Contact/Location: BRAD ELLIS - SDITER