

PROBLEM SUMMARY

Sample Rating Trend DIRT


Machine Id CRANE 13

Main Hoist

PETRO CANADA ENDURATEX EP 220 (--- GAL)



COMPONENT CONDITION SUMMARY

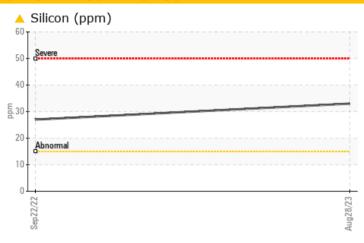

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATION	PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ABNORMAL			
Silicon	ppm	ASTM D5185m	>15	4 33	<u>^</u> 27			

Customer Id: SDITER Sample No.: PCA0101561 Lab Number: 05937400 Test Package: PLANT To manage this report scan the QR code To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

22 Sep 2022 Diag: Jonathan Hester

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

[] **CRANE** 13

Main Hoist

PETRO CANADA ENDURATEX EP 220 (--- GAL)

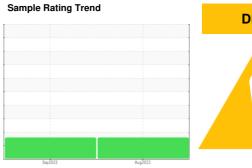



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Sep 2022	Aug2023		
MATION	method	limit/base	current	history1	history2
	Client Info		PCA0101561	PCA0080289	
hrs			•		
hrs			0	0	
	Client Info		N/A	Not Changd	
			ABNORMAL	ABNORMAL	
S	method	limit/base	current	history1	history2
	ASTM D8184		17	2	
nnm		>20			
			-		
• •					
		720			
• •					
		> 20	-		
		>20			
• •					
ppm	ASTM D5185m		0	0	
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	60	9	1	
ppm	ASTM D5185m	0	29	30	
ppm	ASTM D5185m	0	1	1	
ppm	ASTM D5185m	0	0	0	
ppm	ASTM D5185m	0	<1	0	
ppm	ASTM D5185m	0	16	16	
ppm	ASTM D5185m	270	198	182	
ppm	ASTM D5185m	0	5	4	
ppm	ASTM D5185m	11200	400==		
		0 0	12877	14497	
TS	method	limit/base	12877 current	14497 history1	history2
TS ppm	method ASTM D5185m				
ppm		limit/base	current	history1	
	ASTM D5185m	limit/base	current ^ 33	history1	history2
ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >15	current 33 0	history1 27	history2
ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >15 >20	current ▲ 33 0 <1	history1 27 0 0	history2
ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method	limit/base >15 >20 limit/base	current 33 0 <1 current	history1 27 0 0 history1	history2 history2
ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045	limit/base >15 >20 limit/base 0.40	current	history1 ▲ 27 0 0 history1 0.45	history2 history2
ppm ppm ppm DATION mg KOH/g	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method	limit/base >15 >20 limit/base 0.40 limit/base	current 33 0 <1 current 0.47 current	history1 27 0 0 history1 0.45 history1	history2 history2 history2
ppm ppm ppm DATION mg KOH/g	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE	current 33 0 <1 current 0.47 current NONE	history1 27 0 0 history1 0.45 history1 LIGHT	history2 history2 history2
ppm ppm ppm DATION mg KOH/g scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE	current 33 0 <1 current 0.47 current NONE NONE	history1 27 0 0 history1 0.45 history1 LIGHT NONE	history2 history2 history2
ppm ppm ppm DATION mg KOH/g scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE NONE	current 33 0 <1 current 0.47 current NONE NONE NONE	history1 27 0 0 history1 0.45 history1 LIGHT NONE NONE	history2 history2 history2
ppm ppm ppm DATION mg KOH/g scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual *Visual *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE NONE NONE NONE NONE	current 33 0 <1 current 0.47 current NONE NONE NONE NONE NONE NONE NONE	history1 27 0 0 history1 0.45 history1 LIGHT NONE NONE NONE NONE	history2 history2 history2
ppm ppm ppm ppm mg KOH/g scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE NONE NONE NONE NONE NONE	current 33 0 <1 current 0.47 current NONE NONE NONE NONE NONE NONE NONE NON	history1 27 0 0 history1 0.45 history1 LIGHT NONE NONE NONE NONE NONE NONE	history2 history2 history2
ppm ppm ppm ppm DATION mg KOH/g scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE NONE NONE NONE NONE NONE NON	current 33 0 <1 current 0.47 current NONE NONE NONE NONE NONE NONE NONE NON	history1 27 0 0 history1 0.45 history1 LIGHT NONE NONE NONE NONE NONE NONE NONE NON	history2 history2 history2
ppm ppm ppm ppm mg KOH/g scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	limit/base >15 >20 limit/base 0.40 limit/base NONE NONE NONE NONE NONE NONE NONE	current 33 0 <1 current 0.47 current NONE NONE NONE NONE NONE NONE NONE NON	history1 27 0 0 history1 0.45 history1 LIGHT NONE NONE NONE NONE NONE NONE	history2 history2 history2
	ppm	Client Info Client Info Client Info hrs Client Info S method ASTM D8184 ppm ASTM D5185m	Client Info	Client Info	Client Info



OIL ANALYSIS REPORT

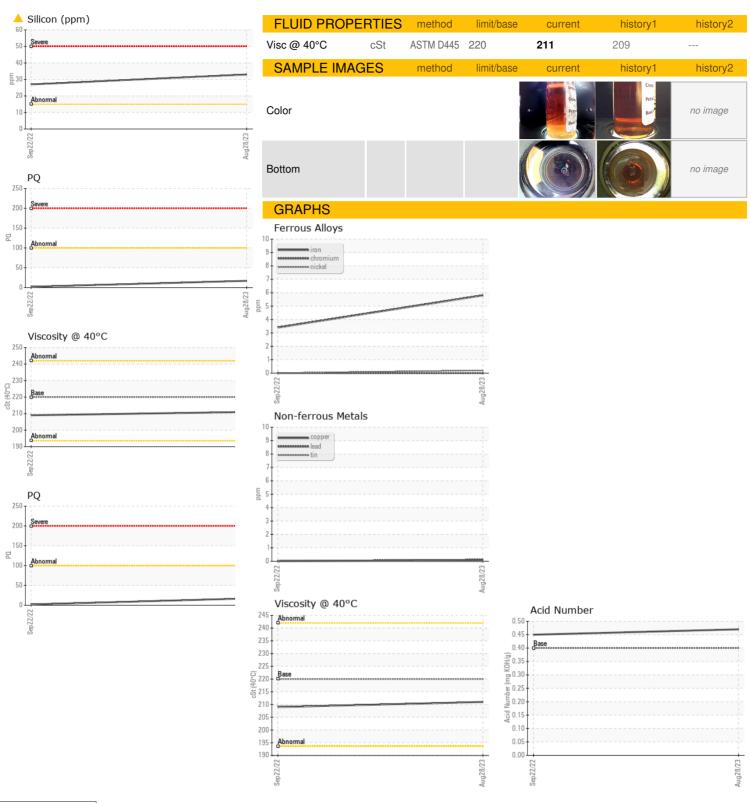



Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: PCA0101561 : 05937400 : 10622671 Test Package : PLANT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 29 Aug 2023 : 30 Aug 2023 Diagnostician : Don Baldridge SDI - Steel DynamicsInc. - Heartland 455 West Industrial Drive

Terre Haute, IN US 47802

Contact: BRAD ELLIS brad.ellis@steeldynamics.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: