




PROBLEM SUMMARY

Sample Rating Trend


GLYCOL



Machine Id
822040-101255
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

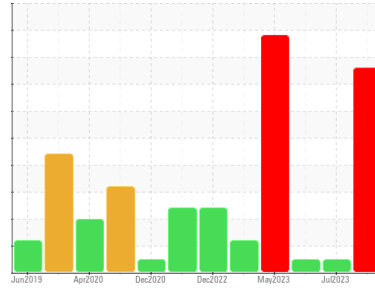

COMPONENT CONDITION SUMMARY

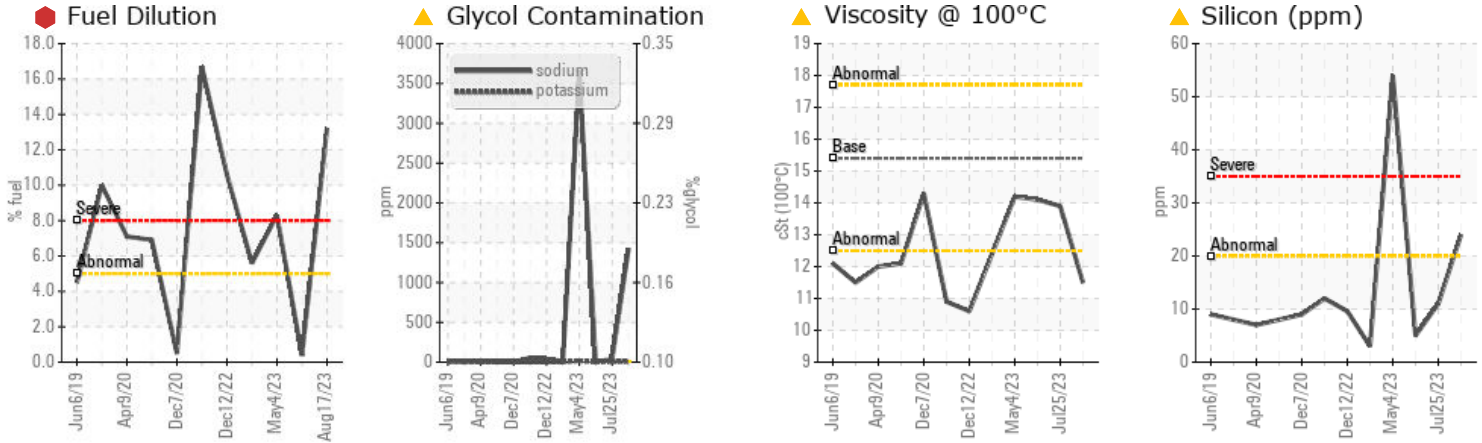

RECOMMENDATION

We advise that you check the fuel injection system. We advise that you check for the source of the coolant leak. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Silicon	ppm	ASTM D5185m	>20	▲ 24	11	5
Sodium	ppm	ASTM D5185m		▲ 1425	35	9
Fuel	%	ASTM D3524	>5	● 13.2	<1.0	0.4
Glycol	%	*ASTM D2982		▲ 0.10	NEG	NEG
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	13.9	14.1

Customer Id: GFL837
 Sample No.: GFL0090644
 Lab Number: 05938068
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

25 Jul 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



28 Jun 2023 Diag: Wes Davis

NORMAL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



04 May 2023 Diag: Jonathan Hester

DIRT



We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Cylinder, crank, or cam shaft wear is indicated. Sodium and/or potassium levels are high. There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material. The BN result indicates that there is suitable alkalinity remaining in the oil.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

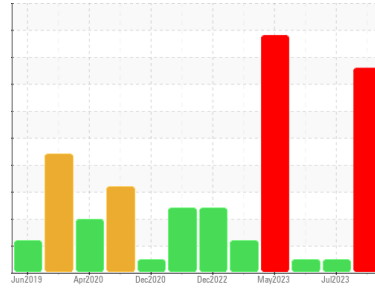

GLYCOL



Machine Id
822040-101255
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We advise that you check for the source of the coolant leak. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive. There is a high amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090644	GFL0087151	GFL0083761
Sample Date	Client Info		17 Aug 2023	25 Jul 2023	28 Jun 2023
Machine Age	hrs	Client Info	16979	16836	16670
Oil Age	hrs	Client Info	0	0	600
Oil Changed	Client Info		Not Changed	Not Changed	Changed
Sample Status			SEVERE	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	20	45	8
Chromium	ppm	ASTM D5185m >5	1	2	0
Nickel	ppm	ASTM D5185m >2	<1	<1	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	3	6	<1
Lead	ppm	ASTM D5185m >30	<1	0	0
Copper	ppm	ASTM D5185m >150	18	1	<1
Tin	ppm	ASTM D5185m >5	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	72	3	<1
Barium	ppm	ASTM D5185m 0	0	2	14
Molybdenum	ppm	ASTM D5185m 60	98	68	61
Manganese	ppm	ASTM D5185m 0	<1	<1	0
Magnesium	ppm	ASTM D5185m 1010	843	1100	983
Calcium	ppm	ASTM D5185m 1070	898	1220	1103
Phosphorus	ppm	ASTM D5185m 1150	937	1140	1050
Zinc	ppm	ASTM D5185m 1270	1115	1441	1308
Sulfur	ppm	ASTM D5185m 2060	3477	3724	3854

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	▲ 24	11	5
Sodium	ppm	ASTM D5185m	▲ 1425	35	9
Potassium	ppm	ASTM D5185m >20	7	7	1
Fuel	%	ASTM D3524 >5	◆ 13.2	<1.0	0.4
Glycol	%	*ASTM D2982	▲ 0.10	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	1.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	9.7	12.9	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.2	25.7	18.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.9	24.4	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	12.8	6.3	9.3




OIL ANALYSIS REPORT


Fuel Dilution

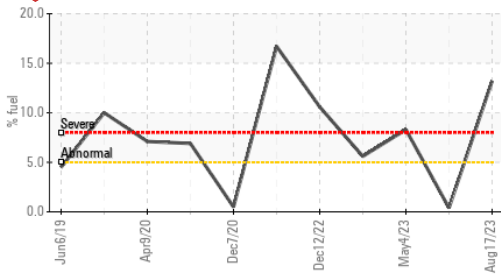


Glycol Contamination

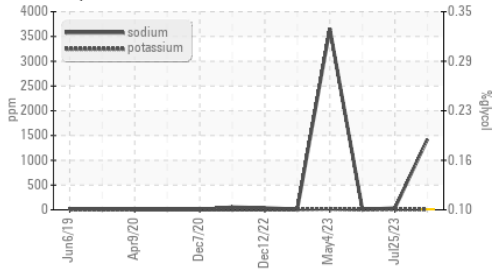


Silicon (ppm)

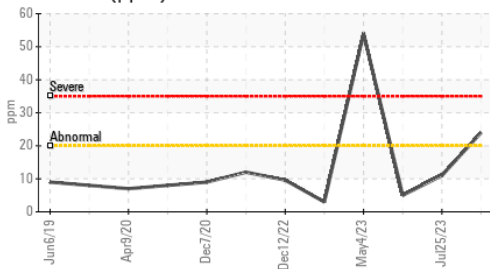

Silicon (ppm)

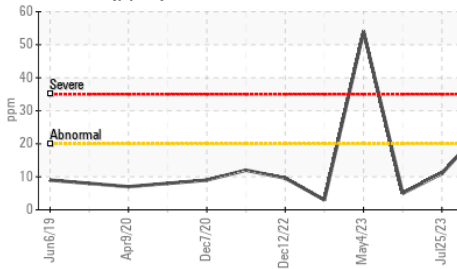

Base Number

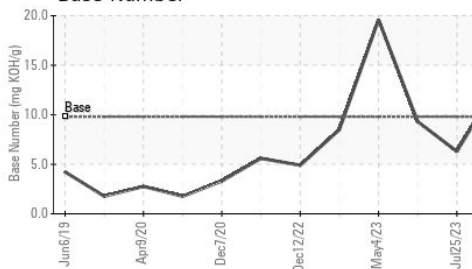

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	13.9

GRAPHS


Ferrous Alloys

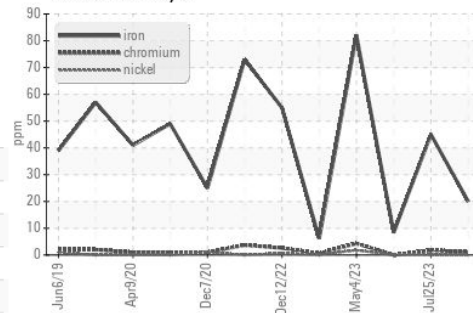


Non-ferrous Metals

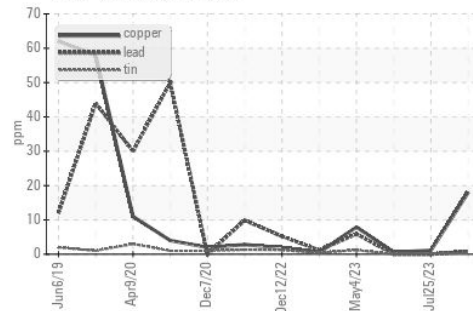

Viscosity @ 100°C

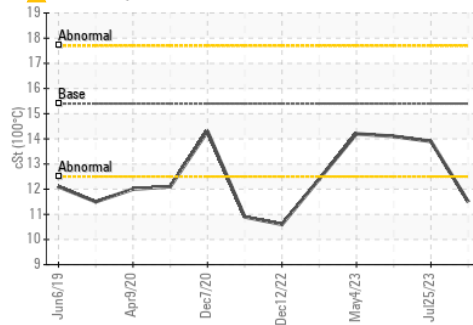

Base Number

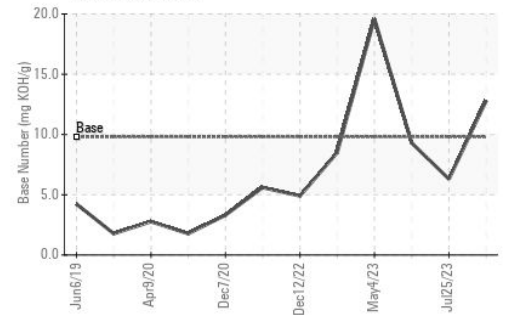

Certificate 12367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0090644 **Received** : 30 Aug 2023
Lab Number : 05938068 **Diagnosed** : 01 Sep 2023
Unique Number : 10628680 **Diagnostician** : Doug Bogart
Test Package : FLEET (Additional Tests: FuelDilution, Glycol, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: BRYAN SWANSON
 bryanswanson@gflenv.com

T:
F: