




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**834049**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

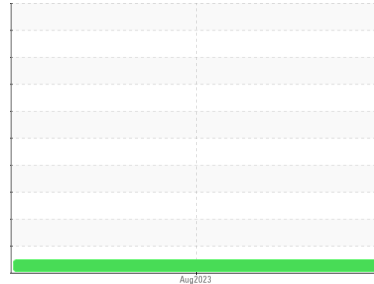

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090687</b>	---	---
Sample Date	Client Info		<b>24 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>178</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>41</b>	---	---
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >9	<b>26</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >35	<b>19</b>	---	---
Tin	ppm	ASTM D5185m >4	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>19</b>	---	---
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m 50	<b>52</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>12</b>	---	---
Magnesium	ppm	ASTM D5185m 560	<b>822</b>	---	---
Calcium	ppm	ASTM D5185m 1510	<b>1143</b>	---	---
Phosphorus	ppm	ASTM D5185m 780	<b>734</b>	---	---
Zinc	ppm	ASTM D5185m 870	<b>947</b>	---	---
Sulfur	ppm	ASTM D5185m 2040	<b>2935</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>33</b>	---	---
Sodium	ppm	ASTM D5185m	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>99</b>	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.6</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.1</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.0</b>	---	---







# OIL ANALYSIS REPORT

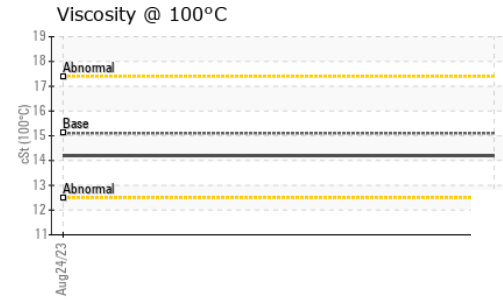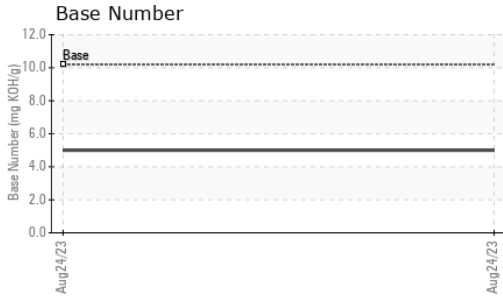

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	---

## GRAPHS

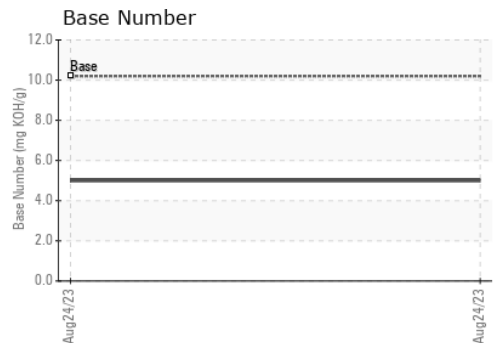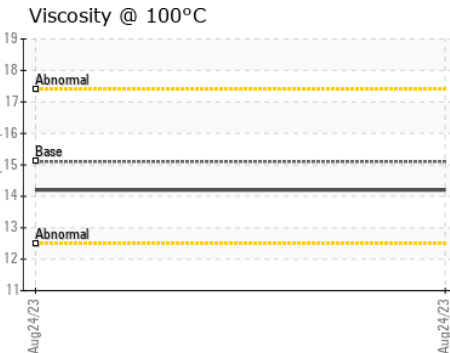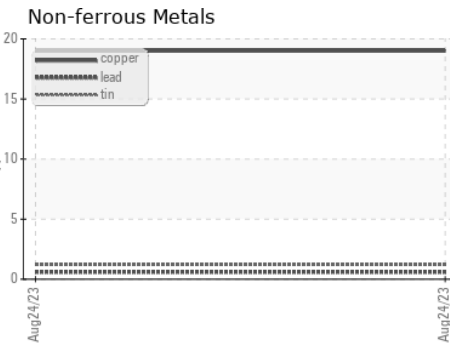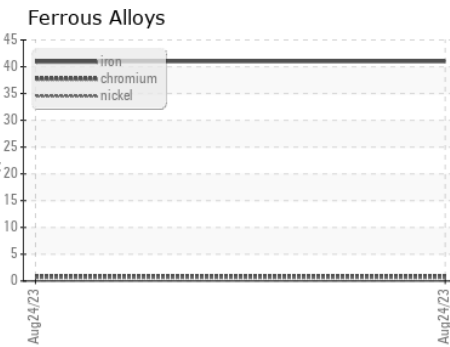

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0090687 Received : 30 Aug 2023  
 Lab Number : 05938072 Diagnosed : 30 Aug 2023  
 Unique Number : 10628684 Diagnostician : Wes Davis  
 Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)