

## **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id 520045

Component Diesel Engine Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a components first oil change.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0090357		
Sample Date		Client Info		25 Aug 2023		
Machine Age	hrs	Client Info		11466		
Oil Age	hrs	Client Info		11466		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
-		and the set	1		la facta a su a f	history O
WEAR METAL		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	14		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	<1		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 4	history1	history2
	ppm ppm					
Boron		ASTM D5185m	0	4		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0	4 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	4 0 57		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	4 0 57 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	4 0 57 <1 950		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	4 0 57 <1 950 1124	  	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	4 0 57 <1 950 1124 994	   	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	4 0 57 <1 950 1124 994 1259	    	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	4 0 57 <1 950 1124 994 1259 3447		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	4 0 57 <1 950 1124 994 1259 3447 current		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>limit/base</b>	4 0 57 <1 950 1124 994 1259 3447 current 5	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>limit/base</b>	4 0 57 <1 950 1124 994 1259 3447 <u>current</u> 5 5	     history1	     history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 <b>limit/base</b> >25 >20	4 0 57 <1 950 1124 994 1259 3447 current 5 5 5 4 4	      history1  	     history2  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm <b>TS</b> ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 >25 >20 <b>limit/base</b> >20	4 0 57 <1 950 1124 994 1259 3447 <i>current</i> 5 5 4 <i>current</i> 0.5	     history1   history1	     history2   history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 >25 >20 <b>limit/base</b> >20	4 0 57 <1 950 1124 994 1259 3447 <i>current</i> 5 5 4 <i>current</i> 0.5 8.9	     history1   history1  history1	     history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>imit/base</b> >25 <b>imit/base</b> >20 <b>imit/base</b> >3 >20	4 0 57 <1 950 1124 994 1259 3447 <i>current</i> 5 5 4 4 <i>current</i> 0.5 8.9 21.2	       history1  history1  history1	     history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844	0 0 0 1010 1070 1150 1270 2060 2060 225 20 220 220 20 3 20 20 20 20 20 20 20 20 20 20 20 20 20	4 0 57 <1 950 1124 994 1259 3447 <i>current</i> 5 5 5 4 <i>current</i> 0.5 8.9 21.2 <i>current</i>	      history1  history1  history1  history1	     history2  history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <b>imit/base</b> >25 <b>imit/base</b> >20 <b>imit/base</b> >3 >20	4 0 57 <1 950 1124 994 1259 3447 <i>current</i> 5 5 4 4 <i>current</i> 0.5 8.9 21.2	       history1  history1  history1	     history2  history2  history2




# **OIL ANALYSIS REPORT**

VISUAL





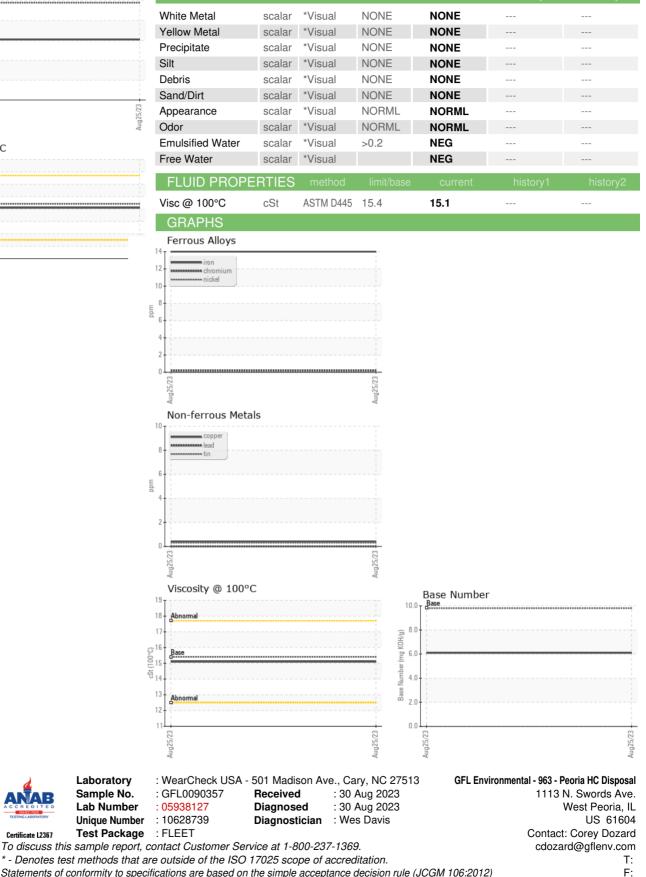

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367