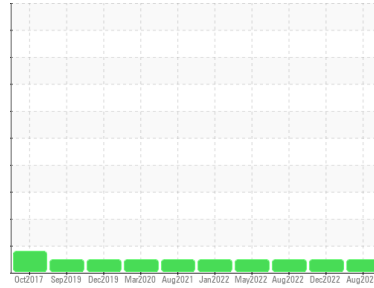


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

 Machine Id
373856

 Component
Diesel Engine

 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)
DIAGNOSIS
Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0104317	PCA0088106	PCA0077200
Sample Date	Client Info		16 Aug 2023	13 Dec 2022	17 Aug 2022
Machine Age	mls	Client Info	173939	165701	156202
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	18	18	13
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	4	3	2
Lead	ppm	ASTM D5185m	>40	<1	3	2
Copper	ppm	ASTM D5185m	>330	1	2	1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	9	0	13
Barium	ppm	ASTM D5185m	0	0	1	<1
Molybdenum	ppm	ASTM D5185m	50	63	76	97
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	936	928	876
Calcium	ppm	ASTM D5185m	1050	1143	1185	1038
Phosphorus	ppm	ASTM D5185m	995	1077	1030	942
Zinc	ppm	ASTM D5185m	1180	1328	1274	1182
Sulfur	ppm	ASTM D5185m	2600	3866	3531	2817

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	3	2	3
Sodium	ppm	ASTM D5185m		4	6	5
Potassium	ppm	ASTM D5185m	>20	2	2	11



INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	1.2	1.4	1.4
Nitration	Abs/cm	*ASTM D7624	>20	11.0	13.3	12.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	23.8	22.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.1	21.4	19.2
Base Number (BN)	mg KOH/g	ASTM D2896		8.7	9.5	9.9









OIL ANALYSIS REPORT

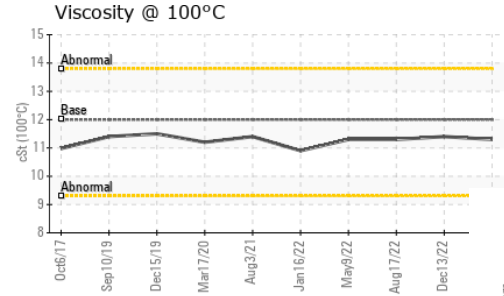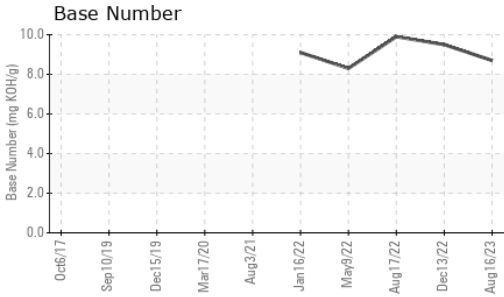

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.4

GRAPHS

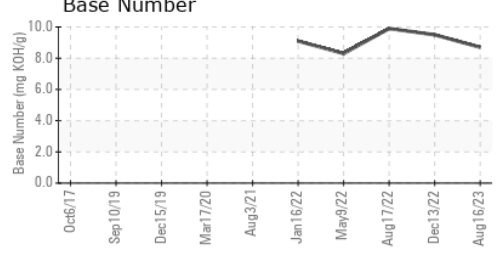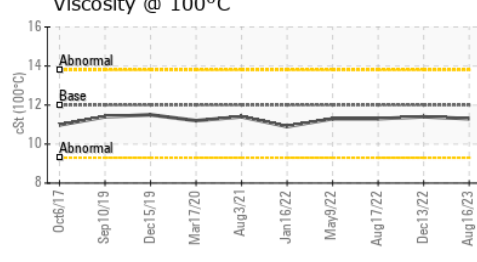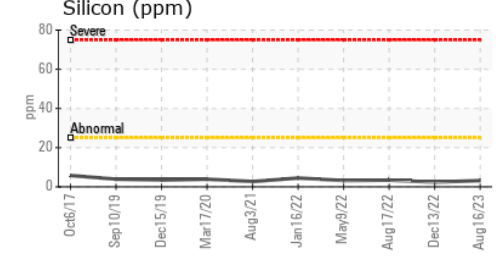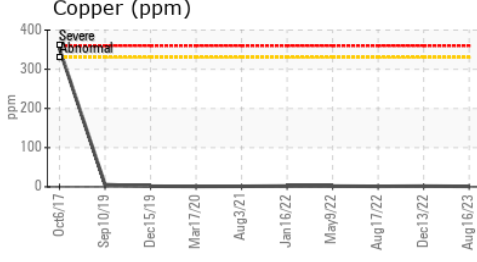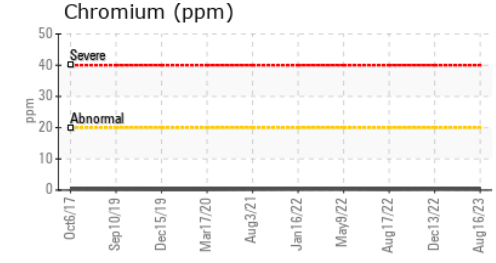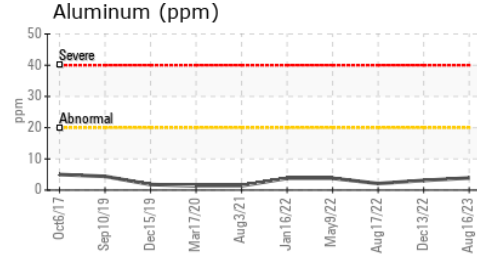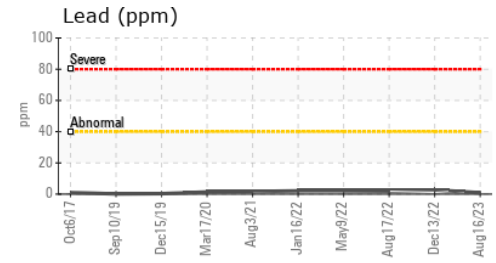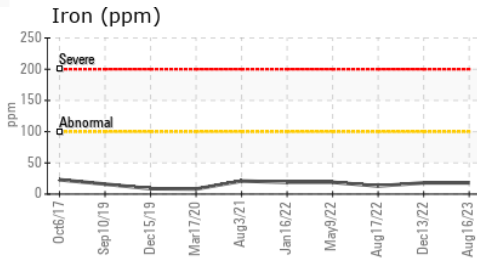

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104317 **Received** : 30 Aug 2023
Lab Number : 05938624 **Diagnosed** : 31 Aug 2023
Unique Number : 10629236 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (201)528-7053