


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

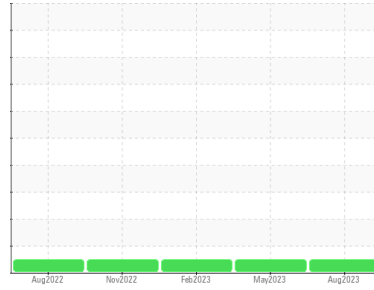

Machine Id  
**121380-5080**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0104300</b>	PCA0098020	PCA0092399	
Sample Date	Client Info	<b>18 Aug 2023</b>	24 May 2023	24 Feb 2023	
Machine Age	mls	Client Info	<b>0</b>	63948	49678
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>77</b>	53	61
Chromium	ppm ASTM D5185m >20	<b>2</b>	1	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>8</b>	6	7
Lead	ppm ASTM D5185m >40	<b>13</b>	2	3
Copper	ppm ASTM D5185m >330	<b>5</b>	8	22
Tin	ppm ASTM D5185m >15	<b>3</b>	3	2
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>&lt;1</b>	7	10
Barium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m 50	<b>71</b>	65	73
Manganese	ppm ASTM D5185m 0	<b>1</b>	2	1
Magnesium	ppm ASTM D5185m 950	<b>1130</b>	985	950
Calcium	ppm ASTM D5185m 1050	<b>1262</b>	1245	1300
Phosphorus	ppm ASTM D5185m 995	<b>1181</b>	1065	1040
Zinc	ppm ASTM D5185m 1180	<b>1500</b>	1390	1339
Sulfur	ppm ASTM D5185m 2600	<b>3765</b>	3605	3420

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>10</b>	8	9
Sodium	ppm ASTM D5185m	<b>4</b>	3	4
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	1



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>2.8</b>	1.8	1.4
Nitration	Abs/cm *ASTM D7624 >20	<b>19.2</b>	14.9	14.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>32.1</b>	27.6	25.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>32.3</b>	27.6	24.4
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.9</b>	7.6	7.7









# OIL ANALYSIS REPORT

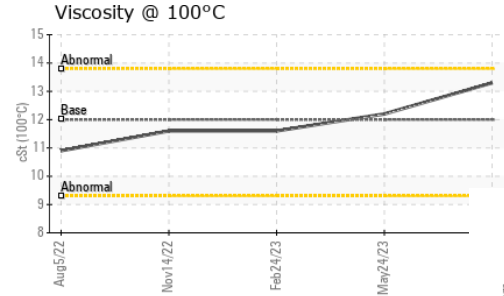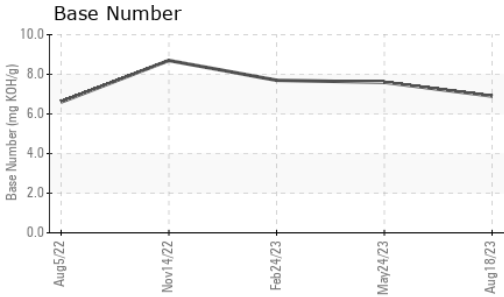

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>13.3</b>	12.2	11.6

## GRAPHS

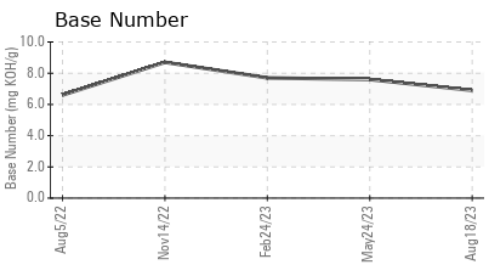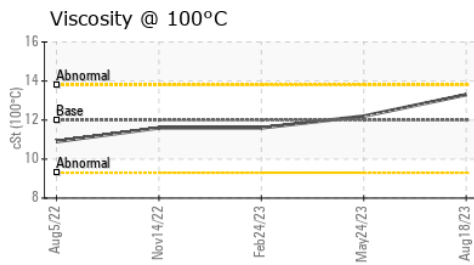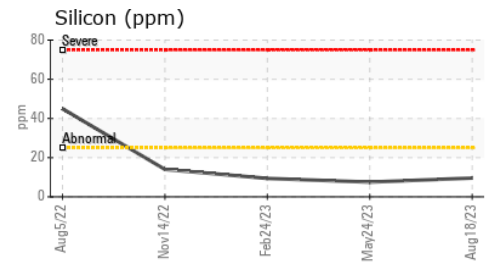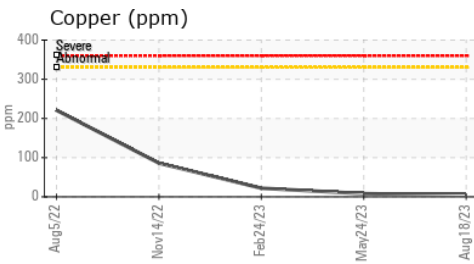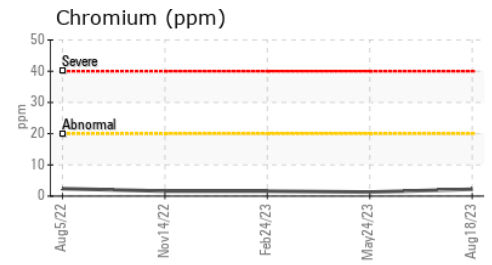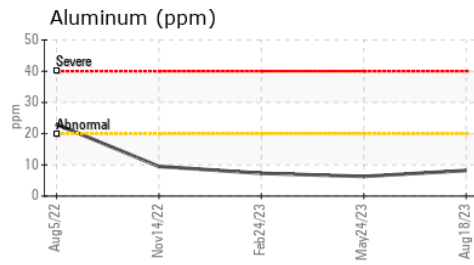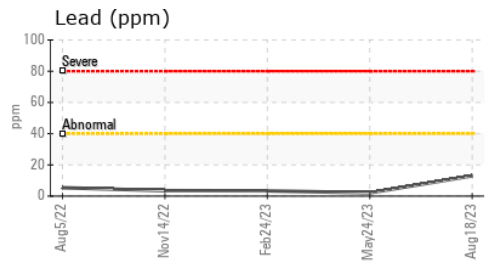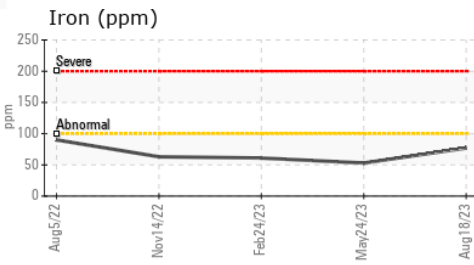

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104300 **Received** : 30 Aug 2023  
**Lab Number** : 05938625 **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10629237 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com  
 T:  
 F: (201)528-7053

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)