


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

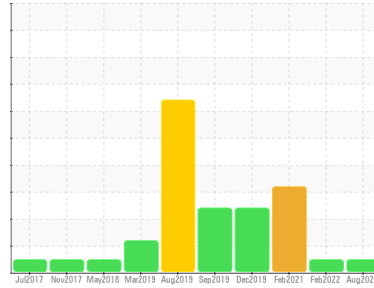

Machine Id  
**VOLVO TRACTOR 26446 (S/N 4V4MC9EG3HN985335)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0104858</b>	PCA0067793	PCA0043818	
Sample Date	Client Info	<b>23 Aug 2023</b>	15 Feb 2022	09 Feb 2021	
Machine Age	mls	Client Info	<b>183043</b>	183043	0
Oil Age	mls	Client Info	<b>183043</b>	183043	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>25</b>	9	▲ 120
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	4
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	2
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	1	▲ 18
Lead	ppm ASTM D5185m >40	<b>1</b>	3	7
Copper	ppm ASTM D5185m >330	<b>2</b>	1	8
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	3
Antimony	ppm ASTM D5185m	<b>---</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	10	7
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>63</b>	57	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	2
Magnesium	ppm ASTM D5185m 950	<b>967</b>	969	952
Calcium	ppm ASTM D5185m 1050	<b>1141</b>	1146	1244
Phosphorus	ppm ASTM D5185m 995	<b>1066</b>	1035	1069
Zinc	ppm ASTM D5185m 1180	<b>1339</b>	1224	1308
Sulfur	ppm ASTM D5185m 2600	<b>3190</b>	2702	2419

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>10</b>	4	▲ 66
Sodium	ppm ASTM D5185m	<b>13</b>	2	12
Potassium	ppm ASTM D5185m >20	<b>2</b>	2	7



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.3	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>11.2</b>	8.5	12.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.7</b>	22.1	25.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.4</b>	17.3	21.9
Base Number (BN)	mg KOH/g ASTM D2896	<b>4.4</b>	9.7	6.3





# OIL ANALYSIS REPORT

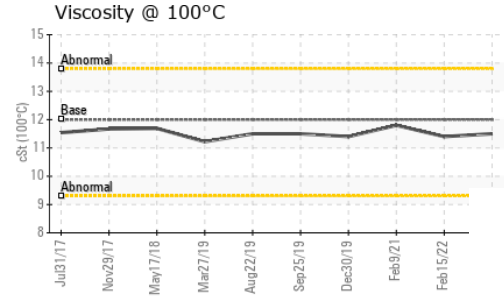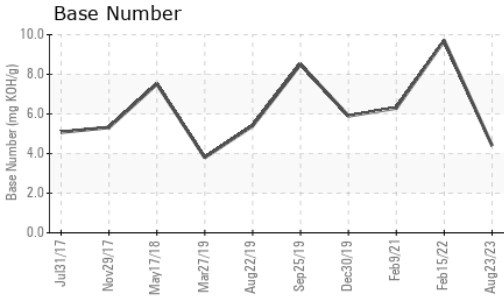

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	11.8

## GRAPHS

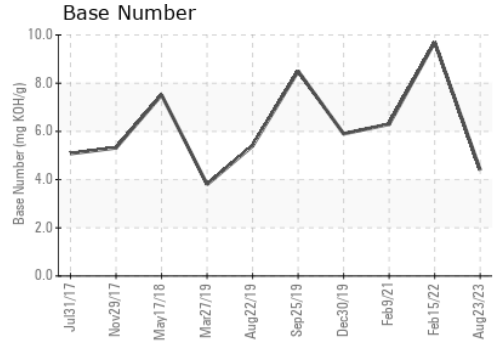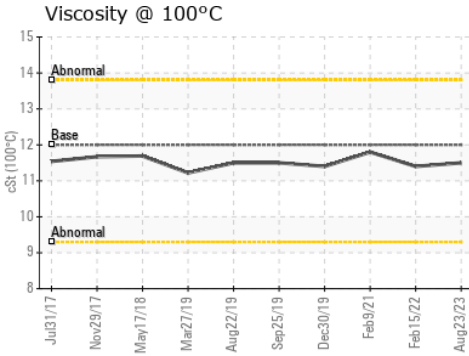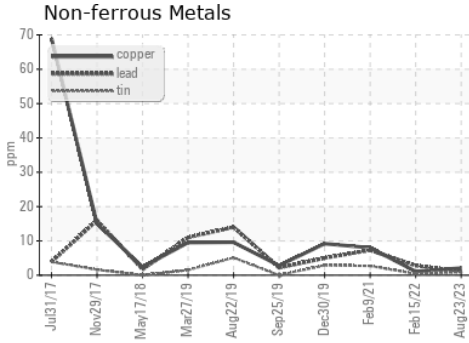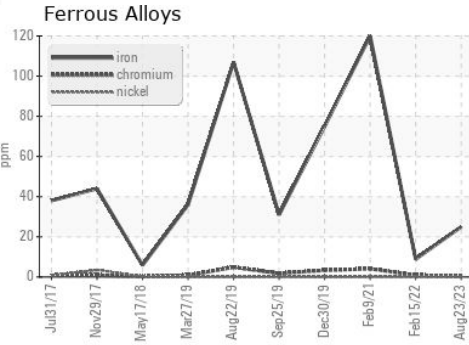

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104858 **Received** : 30 Aug 2023  
**Lab Number** : **05938677** **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10629289 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)