


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

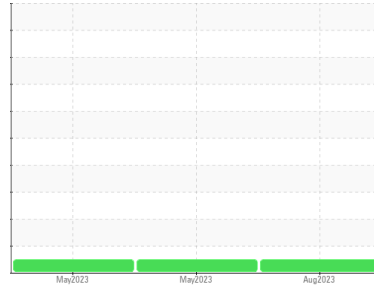

Area  
**(40241Z) Walgreens**  
Machine Id  
**[Walgreens] 136A62554**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0093632</b>	PCA0093659	PCA0093642
Sample Date	Client Info		<b>18 Aug 2023</b>	25 May 2023	09 May 2023
Machine Age	mls	Client Info	<b>178896</b>	151507	147095
Oil Age	mls	Client Info	<b>27389</b>	4412	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>10</b>	3	12
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>24</b>	26	1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>18</b>	52	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>38</b>	38	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>764</b>	724	836
Calcium	ppm	ASTM D5185m 1050	<b>1258</b>	1314	1007
Phosphorus	ppm	ASTM D5185m 995	<b>970</b>	941	937
Zinc	ppm	ASTM D5185m 1180	<b>1233</b>	1170	1163
Sulfur	ppm	ASTM D5185m 2600	<b>4017</b>	4068	3352

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>10</b>	<1	5



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	5.7	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.2</b>	18.2	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	13.2	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.0</b>	8.6	7.1





# OIL ANALYSIS REPORT

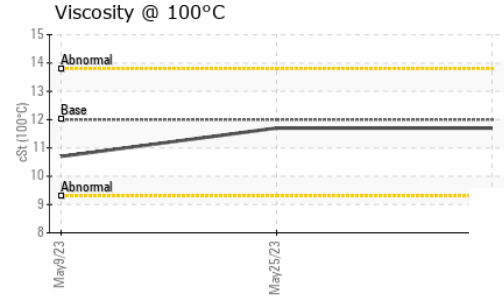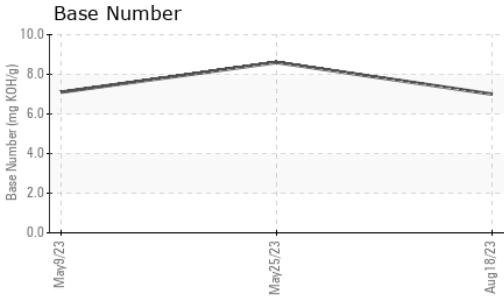

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.7</b>	11.7	10.7

## GRAPHS

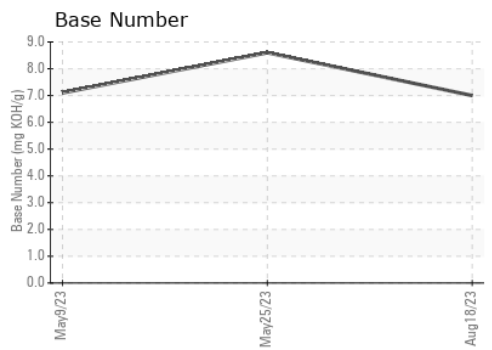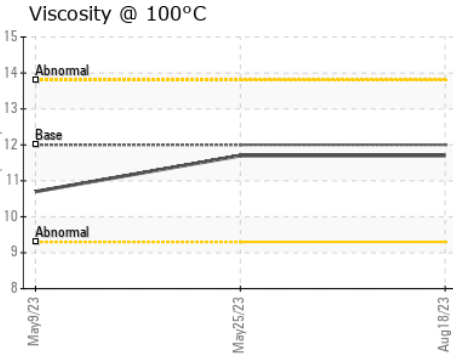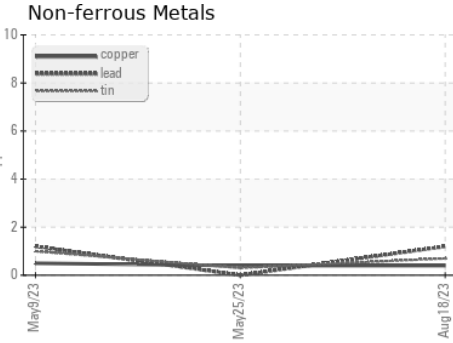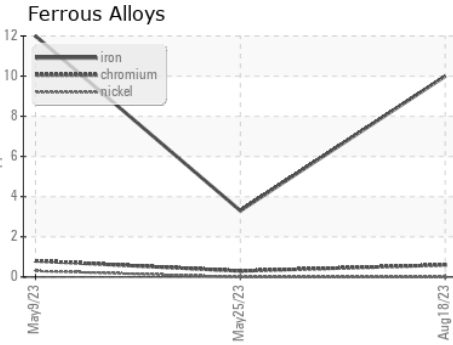

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093632 **Received** : 30 Aug 2023  
**Lab Number** : **05938692** **Diagnosed** : 31 Aug 2023  
**Unique Number** : 10629304 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1365 - Berkeley-Nazareth**  
 6813 Chrisphalt Drive  
 Bath Borough, PA  
 US 18014  
 Contact: Stephen Mackes  
 smackes@transervice.com  
 T: (610)837-8103  
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)