




PROBLEM SUMMARY

Sample Rating Trend



Machine Id
1926695
 Component
1 Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

COMPONENT CONDITION SUMMARY

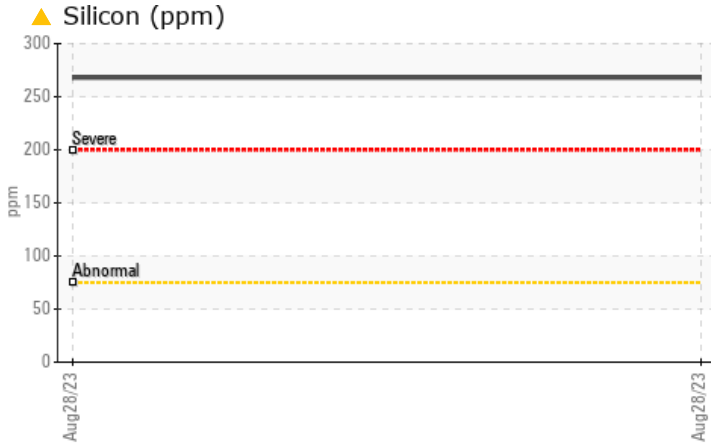

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | ABNORMAL | --- | --- |
|---------------|-----|-------------|-----|-----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | ▲ 268 | --- | --- |

Customer Id: PERDILSC
Sample No.: PCA0104866
Lab Number: 05939382
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
1926695
 Component
1 Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PCA0104866 | --- | --- |
| Sample Date | Client Info | | 28 Aug 2023 | --- | --- |
| Machine Age | mls | Client Info | 132821 | --- | --- |
| Oil Age | mls | Client Info | 132821 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

| WEAR METALS | method | limit/base | current | history1 | history2 |
|-------------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >500 | 339 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 2 | --- | --- |
| Nickel | ppm | ASTM D5185m >10 | 8 | --- | --- |
| Titanium | ppm | ASTM D5185m | 2 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | 12 | --- | --- |
| Lead | ppm | ASTM D5185m >25 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >100 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |



| ADDITIVES | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 400 | 235 | --- | --- |
| Barium | ppm | ASTM D5185m 200 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m 12 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | 6 | --- | --- |
| Magnesium | ppm | ASTM D5185m 12 | 3 | --- | --- |
| Calcium | ppm | ASTM D5185m 150 | 109 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 1650 | 1445 | --- | --- |
| Zinc | ppm | ASTM D5185m 125 | 4 | --- | --- |
| Sulfur | ppm | ASTM D5185m 22500 | 30122 | --- | --- |

| CONTAMINANTS | method | limit/base | current | history1 | history2 |
|--------------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >75 | ▲ 268 | --- | --- |
| Sodium | ppm | ASTM D5185m | 5 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 3 | --- | --- |

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |




| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 109 | 101 | --- | --- |

OIL ANALYSIS REPORT

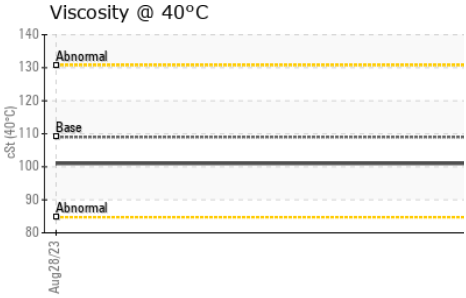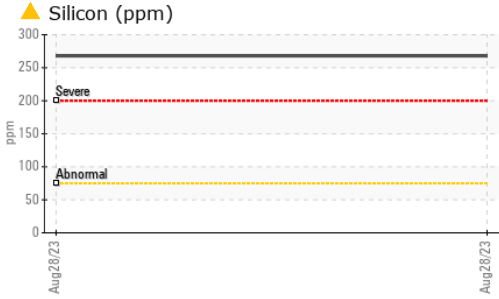

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color | | | no image | no image | no image |
| Bottom | | | no image | no image | no image |

GRAPHS

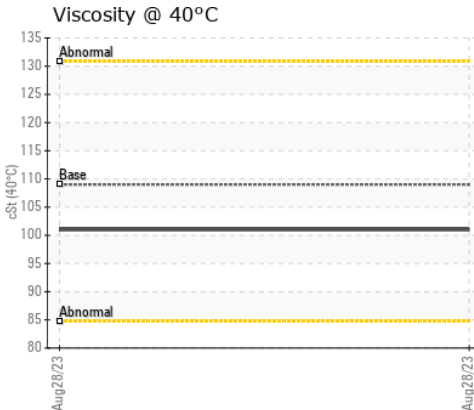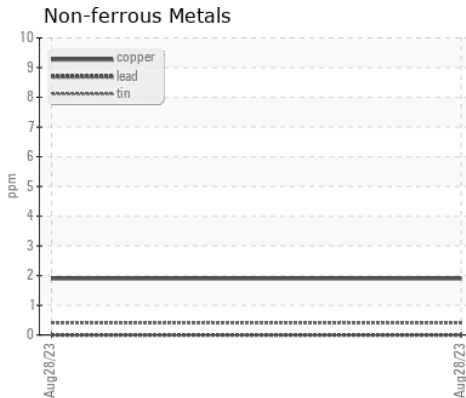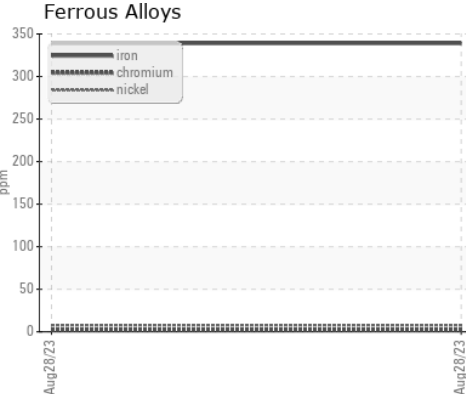

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104866 **Received** : 30 Aug 2023
Lab Number : 05939382 **Diagnosed** : 01 Sep 2023
Unique Number : 10629994 **Diagnostician** : Sean Felton
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: JEFFREY LANE
 jeffrey.lane@perdue.com
 T:
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)